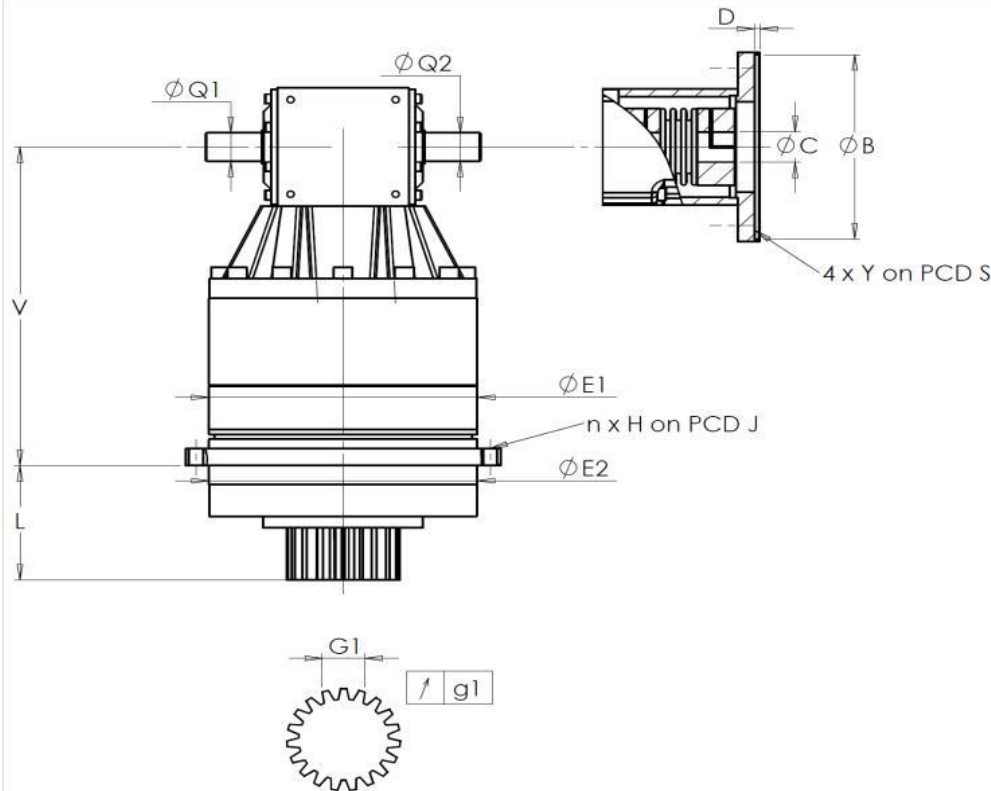
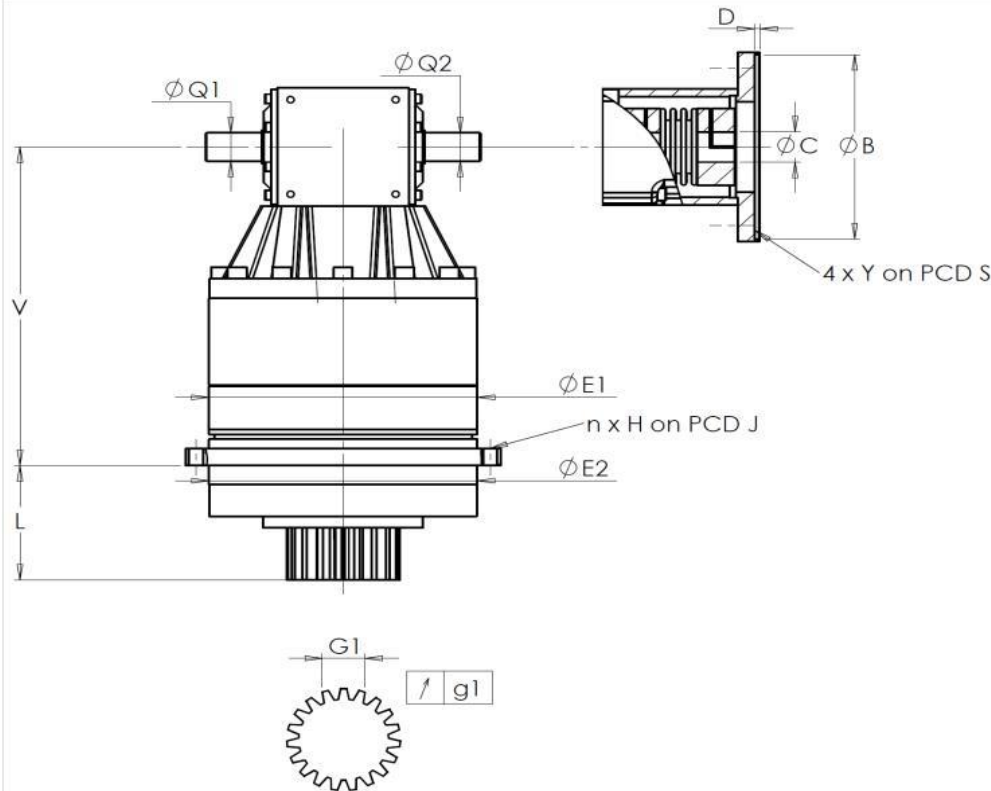


KRP				Page																																																																																																																																																												
PERFORMANCE SHEET		RX183-006-A	1/2																																																																																																																																																													
CUSTOMER:	ELECTROIMPACT	CUSTOMER ORDER REF:	24304 ELECTROIMPACT																																																																																																																																																													
DISTRIBUTOR:	ANDANTEX INCORPORATED	REDEX ORDER REF:	209347																																																																																																																																																													
DESIGNATION:	KRP1+R.31.4.H	SERIAL NUMBER:	896960																																																																																																																																																													
CODE:	RX129591-12	MOTOR FLANGE CODE:	RX129592-05																																																																																																																																																													
For the installation, please refer to User Manual KRP (182/008)																																																																																																																																																																
					EXTERNAL DIMENSIONS & INTERFACES:																																																																																																																																																											
					SN: 896960																																																																																																																																																											
																																																																																																																																																																
					General tolerance: Js13																																																																																																																																																											
					Automatic / manual coordinate-measuring machine																																																																																																																																																											
					Micrometer																																																																																																																																																											
					Cr Calliper rule																																																																																																																																																											
					Di Dial indicator																																																																																																																																																											
					Pg Plug gauge																																																																																																																																																											
<table><thead><tr><th colspan="5">HOUSING</th><th colspan="4">OUTPUT PINION</th><th colspan="4">MOTOR FLANGE</th></tr><tr><th colspan="3">requirement</th><th colspan="2">measure</th><th colspan="2">requirement</th><th colspan="2">measure</th><th colspan="2">requirement</th><th colspan="2">measure</th></tr></thead><tbody><tr><td colspan="3"></td><td colspan="2">K5842</td><td colspan="2"></td><td colspan="2">Q2298</td><td colspan="2"></td><td colspan="2">J3786</td></tr><tr><td></td><td>E1</td><td>152h7⁰_{-0,04}</td><td>µm</td><td>151,985</td><td colspan="4">Span dimension over 3 teeth</td><td>Ø</td><td>B</td><td>110</td><td>^{+0,047}_{+0,012} µm 110,031</td></tr><tr><td></td><td>E2</td><td>140h7⁰_{-0,04}</td><td>µm</td><td>139,98</td><td></td><td>G1</td><td>23,28⁰_{-0,03}</td><td>Cmm 23,26</td><td>Ø</td><td>C</td><td>24</td><td>^{+0,041}_{+0,020} µm 24,05</td></tr><tr><td colspan="2">n x H on PCD J</td><td>12 Ø6,5 on PCD 168</td><td>Cr</td><td>12 Ø6,5 on PCD 168</td><td></td><td>g1</td><td>0,021</td><td>Di 0,015</td><td></td><td>D</td><td>5</td><td>Cr 5,09</td></tr><tr><td></td><td>V</td><td>228,5</td><td>µm</td><td>228,41</td><td colspan="4">No-load input torque</td><td>Ø</td><td>S1</td><td>130</td><td>Cr 130</td></tr><tr><td></td><td>L</td><td>71</td><td>µm</td><td>70,78</td><td colspan="4">Line 1 0,2 Nm</td><td>Ø</td><td>Y1</td><td>M8</td><td>Pg M8</td></tr><tr><td>Ø</td><td>Q1</td><td>20^{+0,009}_{-0,004}</td><td>µm</td><td>20,005</td><td colspan="4"></td><td colspan="4">Noise level</td></tr><tr><td>Ø</td><td>Q2</td><td>20^{+0,009}_{-0,004}</td><td>µm</td><td>20</td><td colspan="4"></td><td colspan="4">@2600 rpm input (dB(A)) 72,5</td></tr><tr><td colspan="5"></td><td colspan="2">Torsional stiffness (Nm/arcmin)</td><td>1</td><td>92</td><td colspan="4"></td></tr><tr><td colspan="5"></td><td colspan="2">Radial stiffness (N/µm)</td><td>1</td><td>365</td><td colspan="4"></td></tr></tbody></table>					HOUSING					OUTPUT PINION				MOTOR FLANGE				requirement			measure		requirement		measure		requirement		measure					K5842				Q2298				J3786			E1	152h7 ⁰ _{-0,04}	µm	151,985	Span dimension over 3 teeth				Ø	B	110	^{+0,047} _{+0,012} µm 110,031		E2	140h7 ⁰ _{-0,04}	µm	139,98		G1	23,28 ⁰ _{-0,03}	Cmm 23,26	Ø	C	24	^{+0,041} _{+0,020} µm 24,05	n x H on PCD J		12 Ø6,5 on PCD 168	Cr	12 Ø6,5 on PCD 168		g1	0,021	Di 0,015		D	5	Cr 5,09		V	228,5	µm	228,41	No-load input torque				Ø	S1	130	Cr 130		L	71	µm	70,78	Line 1 0,2 Nm				Ø	Y1	M8	Pg M8	Ø	Q1	20 ^{+0,009} _{-0,004}	µm	20,005					Noise level				Ø	Q2	20 ^{+0,009} _{-0,004}	µm	20					@2600 rpm input (dB(A)) 72,5									Torsional stiffness (Nm/arcmin)		1	92										Radial stiffness (N/µm)		1	365				
HOUSING					OUTPUT PINION				MOTOR FLANGE																																																																																																																																																							
requirement			measure		requirement		measure		requirement		measure																																																																																																																																																					
			K5842				Q2298				J3786																																																																																																																																																					
	E1	152h7 ⁰ _{-0,04}	µm	151,985	Span dimension over 3 teeth				Ø	B	110	^{+0,047} _{+0,012} µm 110,031																																																																																																																																																				
	E2	140h7 ⁰ _{-0,04}	µm	139,98		G1	23,28 ⁰ _{-0,03}	Cmm 23,26	Ø	C	24	^{+0,041} _{+0,020} µm 24,05																																																																																																																																																				
n x H on PCD J		12 Ø6,5 on PCD 168	Cr	12 Ø6,5 on PCD 168		g1	0,021	Di 0,015		D	5	Cr 5,09																																																																																																																																																				
	V	228,5	µm	228,41	No-load input torque				Ø	S1	130	Cr 130																																																																																																																																																				
	L	71	µm	70,78	Line 1 0,2 Nm				Ø	Y1	M8	Pg M8																																																																																																																																																				
Ø	Q1	20 ^{+0,009} _{-0,004}	µm	20,005					Noise level																																																																																																																																																							
Ø	Q2	20 ^{+0,009} _{-0,004}	µm	20					@2600 rpm input (dB(A)) 72,5																																																																																																																																																							
					Torsional stiffness (Nm/arcmin)		1	92																																																																																																																																																								
					Radial stiffness (N/µm)		1	365																																																																																																																																																								
SPECIFIC REMARKS:																																																																																																																																																																
Date: 26/03/2015																																																																																																																																																																
Visa: JJ PELLÉ																																																																																																																																																																
Version: A																																																																																																																																																																
Product images are for illustrative purposes only.																																																																																																																																																																
REDEX ANDANTEX		ZI-BP79 F45210 FERRIERES www.redex.fr	Tel: +33 2 38 94 42 00 Fax: +33 2 38 94 42 99 Email: info@redex.fr																																																																																																																																																													

KRP				Page																																																																																																																																																													
PERFORMANCE SHEET		RX183-006-A	2/2																																																																																																																																																														
EXTERNAL DIMENSIONS & INTERFACES:																																																																																																																																																																	
SN: 896960																																																																																																																																																																	
																																																																																																																																																																	
General tolerance: Js13																																																																																																																																																																	
Automatic / manual coordinate-measuring machine																																																																																																																																																																	
Micrometer																																																																																																																																																																	
Cr Calliper rule																																																																																																																																																																	
Di Dial indicator																																																																																																																																																																	
Pg Plug gauge																																																																																																																																																																	
<table><thead><tr><th colspan="5">HOUSING</th><th colspan="4">OUTPUT PINION</th><th colspan="4">MOTOR FLANGE</th></tr><tr><th colspan="3">requirement</th><th colspan="2">measure</th><th colspan="2">requirement</th><th colspan="2">measure</th><th colspan="2">requirement</th><th colspan="2">measure</th></tr></thead><tbody><tr><td colspan="3"></td><td colspan="2">K5842</td><td colspan="2"></td><td colspan="2">Q2298</td><td colspan="2"></td><td colspan="2">J3786</td></tr><tr><td></td><td>E1</td><td>152h7⁰_{-0,04}</td><td>µm</td><td>151,985</td><td colspan="4">Span dimension over 3 teeth</td><td>Ø</td><td>B</td><td>110</td><td>^{+0,047}_{+0,012} µm 110,031</td></tr><tr><td></td><td>E2</td><td>140h7⁰_{-0,04}</td><td>µm</td><td>139,98</td><td></td><td>G1</td><td>23,28⁰_{-0,03}</td><td>Cmm 23,26</td><td>Ø</td><td>C</td><td>24</td><td>^{+0,041}_{+0,020} µm 24,05</td></tr><tr><td colspan="2">n x H on PCD J</td><td>12 Ø6,5 on PCD 168</td><td>Cr</td><td>12 Ø6,5 on PCD 168</td><td></td><td>g1</td><td>0,021</td><td>Di 0,015</td><td></td><td>D</td><td>5</td><td>Cr 5,09</td></tr><tr><td></td><td>V</td><td>228,5</td><td>µm</td><td>228,41</td><td colspan="4">No-load input torque</td><td>Ø</td><td>S1</td><td>130</td><td>Cr 130</td></tr><tr><td></td><td>L</td><td>71</td><td>µm</td><td>70,78</td><td colspan="4">Line 1 0,2 Nm</td><td>Ø</td><td>Y1</td><td>M8</td><td>Pg M8</td></tr><tr><td>Ø</td><td>Q1</td><td>20^{+0,009}_{-0,004}</td><td>µm</td><td>20,005</td><td colspan="4"></td><td colspan="4">Noise level</td></tr><tr><td>Ø</td><td>Q2</td><td>20^{+0,009}_{-0,004}</td><td>µm</td><td>20</td><td colspan="4"></td><td colspan="4">@2600 rpm input (dB(A)) 72,5</td></tr><tr><td colspan="5"></td><td colspan="2">Torsional stiffness (Nm/arcmin)</td><td>1</td><td>92</td><td colspan="4"></td></tr><tr><td colspan="5"></td><td colspan="2">Radial stiffness (N/µm)</td><td>1</td><td>365</td><td colspan="4"></td></tr></tbody></table>						HOUSING					OUTPUT PINION				MOTOR FLANGE				requirement			measure		requirement		measure		requirement		measure					K5842				Q2298				J3786			E1	152h7 ⁰ _{-0,04}	µm	151,985	Span dimension over 3 teeth				Ø	B	110	^{+0,047} _{+0,012} µm 110,031		E2	140h7 ⁰ _{-0,04}	µm	139,98		G1	23,28 ⁰ _{-0,03}	Cmm 23,26	Ø	C	24	^{+0,041} _{+0,020} µm 24,05	n x H on PCD J		12 Ø6,5 on PCD 168	Cr	12 Ø6,5 on PCD 168		g1	0,021	Di 0,015		D	5	Cr 5,09		V	228,5	µm	228,41	No-load input torque				Ø	S1	130	Cr 130		L	71	µm	70,78	Line 1 0,2 Nm				Ø	Y1	M8	Pg M8	Ø	Q1	20 ^{+0,009} _{-0,004}	µm	20,005					Noise level				Ø	Q2	20 ^{+0,009} _{-0,004}	µm	20					@2600 rpm input (dB(A)) 72,5									Torsional stiffness (Nm/arcmin)		1	92										Radial stiffness (N/µm)		1	365				
HOUSING					OUTPUT PINION				MOTOR FLANGE																																																																																																																																																								
requirement			measure		requirement		measure		requirement		measure																																																																																																																																																						
			K5842				Q2298				J3786																																																																																																																																																						
	E1	152h7 ⁰ _{-0,04}	µm	151,985	Span dimension over 3 teeth				Ø	B	110	^{+0,047} _{+0,012} µm 110,031																																																																																																																																																					
	E2	140h7 ⁰ _{-0,04}	µm	139,98		G1	23,28 ⁰ _{-0,03}	Cmm 23,26	Ø	C	24	^{+0,041} _{+0,020} µm 24,05																																																																																																																																																					
n x H on PCD J		12 Ø6,5 on PCD 168	Cr	12 Ø6,5 on PCD 168		g1	0,021	Di 0,015		D	5	Cr 5,09																																																																																																																																																					
	V	228,5	µm	228,41	No-load input torque				Ø	S1	130	Cr 130																																																																																																																																																					
	L	71	µm	70,78	Line 1 0,2 Nm				Ø	Y1	M8	Pg M8																																																																																																																																																					
Ø	Q1	20 ^{+0,009} _{-0,004}	µm	20,005					Noise level																																																																																																																																																								
Ø	Q2	20 ^{+0,009} _{-0,004}	µm	20					@2600 rpm input (dB(A)) 72,5																																																																																																																																																								
					Torsional stiffness (Nm/arcmin)		1	92																																																																																																																																																									
					Radial stiffness (N/µm)		1	365																																																																																																																																																									
SPECIFIC REMARKS:																																																																																																																																																																	
Date: 26/03/2015																																																																																																																																																																	
Visa: JJ PELLÉ																																																																																																																																																																	
Version: A																																																																																																																																																																	
Product images are for illustrative purposes only.																																																																																																																																																																	
REDEX ANDANTEX		ZI-BP79 F45210 FERRIERES www.redex.fr	Tel: +33 2 38 94 42 00 Fax: +33 2 38 94 42 99 Email: info@redex.fr																																																																																																																																																														