

| KRP               |                       | Page                |                     |
|-------------------|-----------------------|---------------------|---------------------|
| PERFORMANCE SHEET |                       | 1/2                 |                     |
| CUSTOMER:         | ELECTROIMPACT         | CUSTOMER ORDER REF: | 24304 ELECTROIMPACT |
| DISTRIBUTOR:      | ANDANTEX INCORPORATED | REDEX ORDER REF:    | 209347              |
| DESIGNATION:      | KRP1+R.31.4.H         | SERIAL NUMBER:      | 896961              |
| CODE:             | RX129591-12           | MOTOR FLANGE CODE:  | RX129592-05         |

For the installation, please refer to User Manual KRP (182/008)

SPECIFIC REMARKS:

Product images are for illustrative purposes only.

KRP


PERFORMANCE SHEET

RX183-006-A

Page 2/2

EXTERNAL DIMENSIONS & INTERFACES:

SN: 896961

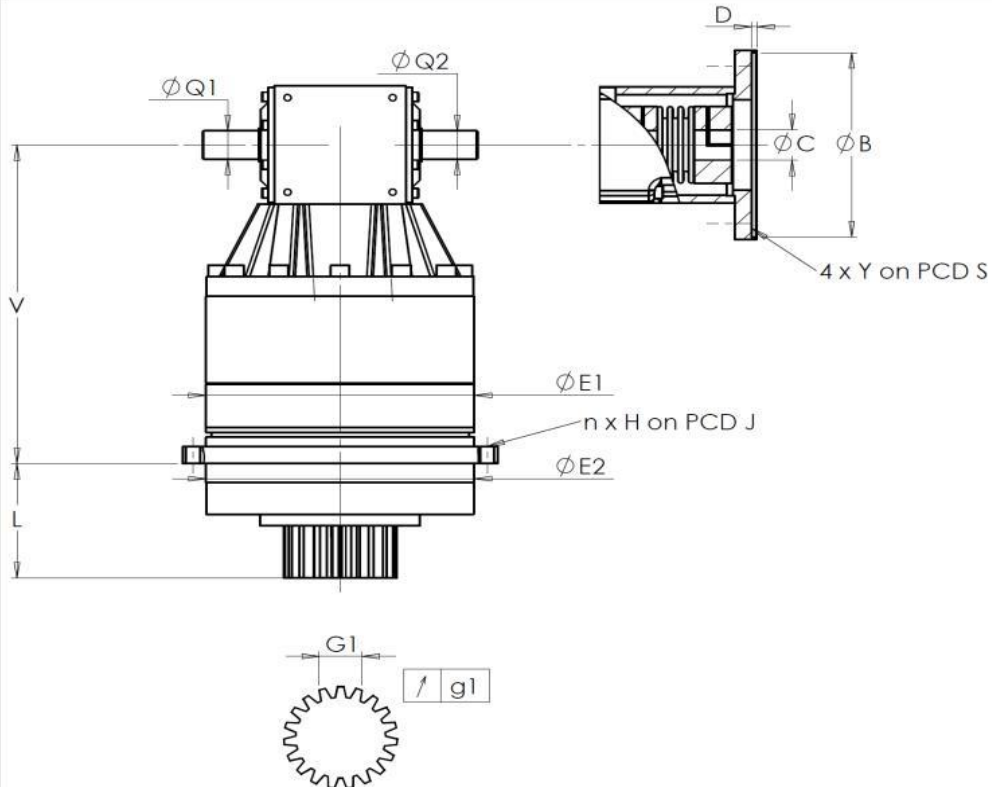

|                         |    |                   |                                     |                                                    |        |                             |                                    |                                     |      |               |               |                         |                                        |                                         |      |              |            |  |  |  |  |
|-------------------------|----|-------------------|-------------------------------------|----------------------------------------------------|--------|-----------------------------|------------------------------------|-------------------------------------|------|---------------|---------------|-------------------------|----------------------------------------|-----------------------------------------|------|--------------|------------|--|--|--|--|
| General tolerance: Js13 |    |                   | Cmm                                 | Automatic / manual<br>coordinate-measuring machine |        |                             | µm                                 | Micrometer                          |      | Cr            | Calliper rule |                         | Di                                     | Dial indicator                          |      | Pg           | Plug gauge |  |  |  |  |
| HOUSING                 |    |                   |                                     |                                                    |        |                             |                                    |                                     |      | OUTPUT PINION |               |                         |                                        |                                         |      | MOTOR FLANGE |            |  |  |  |  |
|                         |    | requirement       |                                     | measure                                            |        |                             |                                    | requirement                         |      | measure       |               |                         |                                        | requirement                             |      | measure      |            |  |  |  |  |
|                         |    |                   |                                     | K7216                                              |        |                             |                                    |                                     |      | Q2311         |               |                         |                                        |                                         |      |              |            |  |  |  |  |
|                         |    | E1                | 152h7 <sup>0</sup> <sub>-0,04</sub> | µm                                                 | 151,97 | Span dimension over 3 teeth |                                    |                                     |      |               |               | Ø                       | B                                      | 110 <sup>+0,047</sup> <sub>+0,012</sub> | µm   |              |            |  |  |  |  |
|                         |    | E2                | 140h7 <sup>0</sup> <sub>-0,04</sub> | µm                                                 | 139,97 |                             | G1                                 | 23,28 <sup>0</sup> <sub>-0,03</sub> | Cmm  | 23,27         | Ø             | C                       | 24 <sup>+0,041</sup> <sub>+0,020</sub> | µm                                      |      |              |            |  |  |  |  |
|                         |    | n x H<br>on PCD J |                                     | 12 Ø6,5 on<br>PCD 168                              | Cr     | 12 Ø6,5 on<br>PCD 168       |                                    |                                     | ↗    | g1            | 0,021         | Di                      | 0,015                                  |                                         | D    | 5            | Cr         |  |  |  |  |
|                         |    | V                 | 228,5                               | µm                                                 | 228,32 | No-load input torque        |                                    |                                     |      |               |               | Ø                       | S1                                     | 130                                     | Cr   |              |            |  |  |  |  |
|                         |    | L                 | 71                                  | µm                                                 | 70,69  |                             |                                    | Line 1                              |      | 0,3 Nm        |               |                         |                                        |                                         |      |              |            |  |  |  |  |
| Ø                       | Q1 | 20                | <sup>+0,009</sup> <sub>-0,004</sub> | µm                                                 | 20     |                             |                                    |                                     |      |               |               | Noise level             |                                        |                                         |      |              |            |  |  |  |  |
| Ø                       | Q2 | 20                | <sup>+0,009</sup> <sub>-0,004</sub> | µm                                                 | 20     |                             |                                    |                                     | Line | Stiffness     |               | @2600 rpm input (dB(A)) |                                        |                                         | 74,5 |              |            |  |  |  |  |
|                         |    |                   |                                     |                                                    |        |                             | Torsional stiffness<br>(Nm/arcmin) |                                     | 1    | 89            |               |                         |                                        |                                         |      |              |            |  |  |  |  |
|                         |    |                   |                                     |                                                    |        |                             | Radial stiffness<br>(N/µm)         |                                     | 1    | 402           |               |                         |                                        |                                         |      |              |            |  |  |  |  |

Date: 26/03/2015

Version: A

Visa: JJ PELLÉ

