

KRP

PERFORMANCE SHEET

RX183-006-A

1/2

CUSTOMER: PAMA

DISTRIBUTOR: ANDANTEX S.r.l

DESIGNATION: KRP3+M.21.3.H.28/38

CODE: RX129016-11


CUSTOMER ORDER REF: ANDIT 72 PAMA

REDEX ORDER REF: 209350

SERIAL NUMBER: 896987

MOTOR FLANGE CODE: RX128581-01

EXTERNAL DIMENSIONS & INTERFACES:

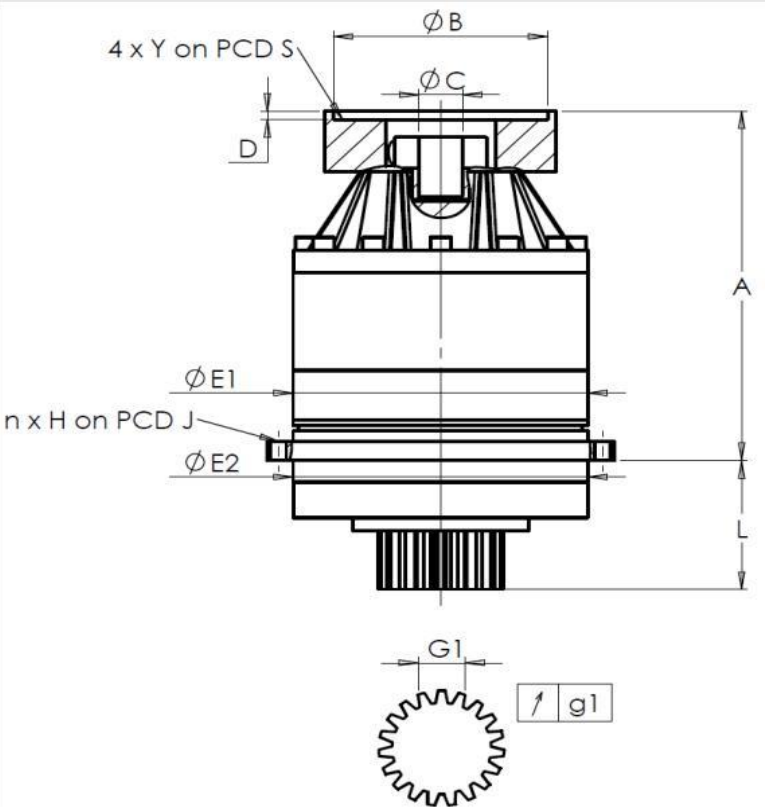

General tolerance: Js13

Cmm

Automatic / manual coordinate-measuring machine

µm

Micrometer

Cr

Calliper rule

Di

Dial indicator

Pg

Plug gauge

HOUSING				OUTPUT PINION				MOTOR FLANGE				
requirement		measure		requirement		measure		requirement		measure		
		K6272				R2387						
E1	255h7 ⁰ _{-0,052}	µm	254,98	Span dimension over 3 teeth				Ø	B	181	µm 180,98	
E2	255h7 ⁰ _{-0,052}	µm	254,97	G1	39,25 ⁰ _{-0,03}	Cmm	39,24	Ø	C	38 ^{+0,05} _{+0,025}	µm 38,05	
n x H on PCD J	16 Ø13,5 on PCD 280	Cr	16 Ø13,5 on PCD 280	g1	0,022	Di	0,02		D	8	Cr 8,56	
A	328,5	µm	329,41	No-load input torque				Ø	S1	215	Cr 215	
L	121	µm	121,055	Line 1				1,5 Nm	Ø	Y1	M12	Pg M12
								Noise level				
								@1600 rpm input (dB(A))		65,0		
				Line		Stiffness						
				Torsional stiffness (Nm/arcmin)		1		505				
				Radial stiffness (N/µm)		1		1178				

Date: 08/04/2015

Version: A

Visa: JJ PELLÉ



For the installation, please refer to User Manual KRP (182/008)

SPECIFIC REMARKS:

Product images are for illustrative purposes only.

REDEX ANDANTEX

ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr

REDEX ANDANTEX

ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr

KRP

PERFORMANCE SHEET

RX183-006-A

2/2

CUSTOMER: PAMA

DISTRIBUTOR: ANDANTEX S.r.l

DESIGNATION: KRP3+M.21.3.H.28/38

CODE: RX129016-11


CUSTOMER ORDER REF: ANDIT 72 PAMA

REDEX ORDER REF: 209350

SERIAL NUMBER: 896987

MOTOR FLANGE CODE: RX128581-01

EXTERNAL DIMENSIONS & INTERFACES:

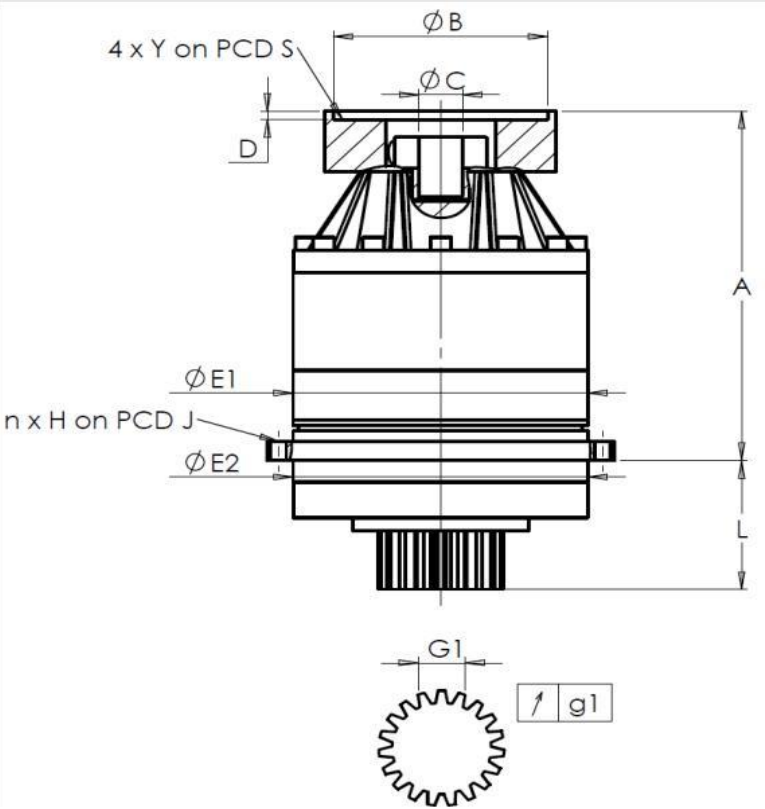

General tolerance: Js13

Cmm

Automatic / manual coordinate-measuring machine

µm

Micrometer

Cr

Calliper rule

Di

Dial indicator

Pg

Plug gauge

HOUSING				OUTPUT PINION				MOTOR FLANGE				
requirement		measure		requirement		measure		requirement		measure		
		K6272				R2387						
E1	255h7 ⁰ _{-0,052}	µm	254,98	Span dimension over 3 teeth				Ø	B	181	µm 180,98	
E2	255h7 ⁰ _{-0,052}	µm	254,97	G1	39,25 ⁰ _{-0,03}	Cmm	39,24	Ø	C	38 ^{+0,05} _{+0,025}	µm 38,05	
n x H on PCD J	16 Ø13,5 on PCD 280	Cr	16 Ø13,5 on PCD 280	g1	0,022	Di	0,02		D	8	Cr 8,56	
A	328,5	µm	329,41	No-load input torque				Ø	S1	215	Cr 215	
L	121	µm	121,055	Line 1				1,5 Nm	Ø	Y1	M12	Pg M12
								Noise level				
								@1600 rpm input (dB(A))		65,0		
				Line		Stiffness						
				Torsional stiffness (Nm/arcmin)		1		505				
				Radial stiffness (N/µm)		1		1178				

Date: 08/04/2015

Version: A

Visa: JJ PELLÉ



For the installation, please refer to User Manual KRP (182/008)

SPECIFIC REMARKS:

Product images are for illustrative purposes only.

REDEX ANDANTEX

ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr

REDEX ANDANTEX

ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr