


ANSCHLÜSSE & AUSSENABMESSUNGEN: SN: 896991

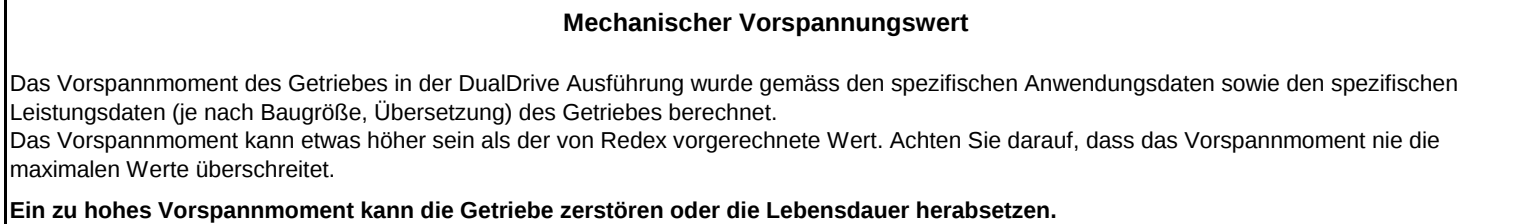

General tolerance: Js13				Cmm		Automatic / manual coordinate-measuring machine				µm		Micrometer		Cr		Calliper rule		Di		Dial indicator		Pg		Plug gauge											
GEHAUSE						GEHAUSE						MOTORFLANSCH																							
Sollwert						Istwert						Sollwert						Istwert						Sollwert						Istwert					
						J9600												O1 43 Cr 43												K3066					
						E 640 ⁰ _{-0,1} Cmm 639,943												P11 100 Cr 100						Ø B 180 ^{+0,054} _{+0,014} µm 180,04											
						G 800 ^{+0,2} _{-0,2} Cmm 799,954												P12 100 Cr 100						Ø C 38 ^{+0,05} _{+0,025} µm 38,05											
//	g 0,05					Cmm 0,033											M 288 ^{+0,1} _{-0,1} Cmm 288,036						D 8 Cr 8,11												
//	t 0,05					Cmm 0,005											O2 43 Cr 43						Ø S 215 Cr 215												
//	u 0,035					Cmm 0,008											P21 100 Cr 100						Ø Y M12 Pg M12												
//	v 0,05					Cmm 0,002											P22 100 Cr 100						K3064												
						W 160 Cmm 160,005						Ø T M24 Pg M24						Ø B 180 ^{+0,054} _{+0,014} µm 180,04																	
//	w 0,04					Cmm 0,001					ABTRIEBSRITZEL										Ø C 38 ^{+0,05} _{+0,025} µm 38,05														
						X 160 Cmm 160,004					Zahnrad 1 R1796					D 8 Cr 8,11																			
//	x 0,04					Cmm 0,001					Zahnweite (über 3 Zähne)										Ø S 215 Cr 215														
						H 320 ^{+0,04} _{-0,04} Cmm 320,009					G1 46,9 ⁰ _{-0,03} Cmm 46,88						Ø Y M12 Pg M12																		
//	h 0,02					Cmm 0,011					↗ g1 0,022 Di 0,01						Linie Steifigkeit																		
						V1 435 Cmm 435,182											Verdrehsteifigkeit (Nm/arcmin) 1 726																		
						L1 120 Cmm 120,066					Zahnrad 2 R1809						2 726																		
						V2 435 Cmm 435,153					Zahnweite (über 3 Zähne)										Radiale Steifigkeit (N/µm) 1 1114														
						L2 120 Cmm 119,949											G2 46,9 ⁰ _{-0,03} Cmm 46,88																		
Ø	Q1 35 ^{+0,011} _{-0,005} Cmm 35,008											↗ g2 0,022 Di 0,02						2 1272																	
Ø	Q2 35 ^{+0,011} _{-0,005} Cmm 35,006					Leerlaufdrehmoment										Geräuschpegel																			
						J1 /0 µm 0															@1300 rpm Eintrieb (dB(A)) 73,0														
						J2 /0 µm 0,02					Linie 2,5 Nm																								
						J3 /0 µm 0,03					Linie 2 2,5 Nm																								

Datum: 13/04/2015 Von: JJ PELLÉ p.o. JP MOZZICONACCI