

DRP		Page
Performance sheet	RX183/005-B	1/2
CUSTOMER:	YUKON CNC MACHINERY CO LT	CUSTOMER ORDER REF: RX104313T YUKON
DISTRIBUTOR:		REDEX ORDER REF: 209909
DESIGNATION:	DRP2+R.31.4.H	SERIAL NUMBER: 897966
CODE:	RX128950-12	MOTOR FLANGE CODE:

Mechanical preload data

The preload torque of the gearbox in DUALDRIVE configuration depends on the application data and features of the gearbox.

The preload torque can be increased but must never exceed the maximum value indicated below.

A too important preload torque reduces the efficiency and the life expectancy of the gearbox and the rack.

Optimal preload torque Tp:

Following application

Maximum preload torque:

18,7 Nm

For the installation, please refer to User Manual DRP (182/009)

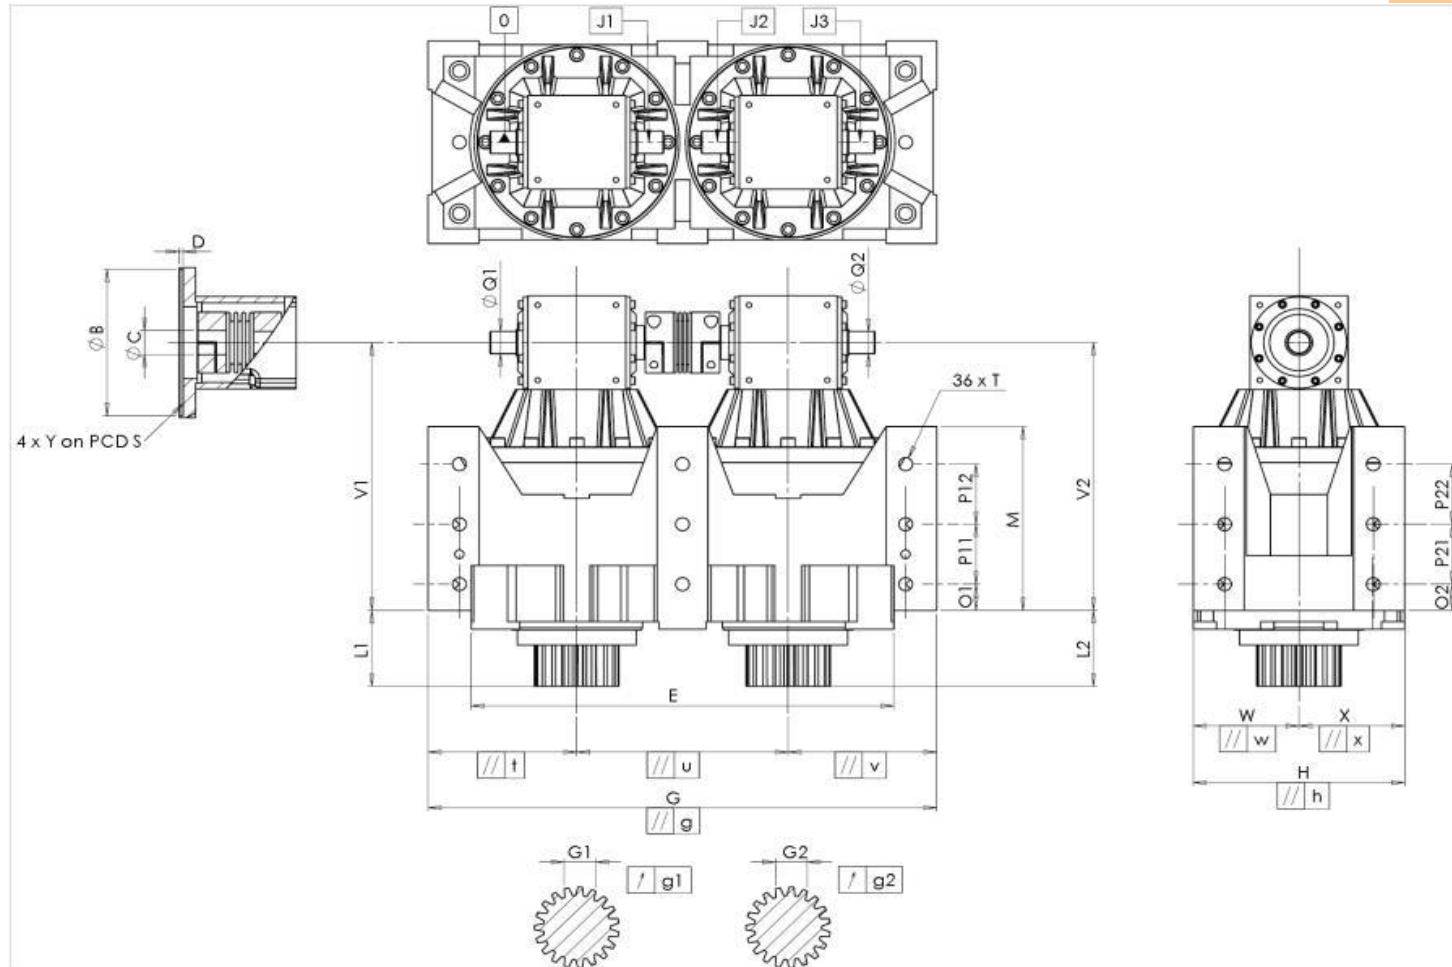
SPECIFIC REMARKS:

Product images are for illustrative purposes only.

REDEX
ANDANTEX

ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr

DRP		Page																																																																																																																																																																																																																																																																																																
Performance sheet		RX183/005-B																																																																																																																																																																																																																																																																																																
		2/2																																																																																																																																																																																																																																																																																																
EXTERNAL DIMENSIONS & INTERFACES:		SN: 897966																																																																																																																																																																																																																																																																																																
																																																																																																																																																																																																																																																																																																		
General tolerance: Js13		Cmm Automatic / manual coordinate-measuring machine																																																																																																																																																																																																																																																																																																
		µm Micrometer																																																																																																																																																																																																																																																																																																
		Cr Calliper rule																																																																																																																																																																																																																																																																																																
		Di Dial indicator																																																																																																																																																																																																																																																																																																
		Pg Plug gauge																																																																																																																																																																																																																																																																																																
<table><tr><th colspan="4">HOUSING</th><th colspan="4">HOUSING</th><th colspan="4">MOTOR FLANGE</th></tr><tr><th colspan="2"></th><th colspan="2">requirement</th><th>measure</th><th colspan="2"></th><th>requirement</th><th>measure</th><th colspan="2">requirement</th><th>measure</th></tr><tr><td colspan="2"></td><td colspan="2"></td><td>L4031</td><td colspan="2"></td><td>O1</td><td>30</td><td colspan="2"></td><td>-</td></tr><tr><td></td><td>E</td><td>460</td><td>⁰_{-0,05}</td><td>Cmm</td><td>459,97</td><td></td><td>P11</td><td>75</td><td colspan="2">Ø B</td><td>µm</td></tr><tr><td></td><td>G</td><td>560</td><td>^{+0,1}_{-0,1}</td><td>Cmm</td><td>560,03</td><td></td><td>P12</td><td>75</td><td colspan="2">Ø C</td><td>µm</td></tr><tr><td>//</td><td>g</td><td>0,045</td><td></td><td>Cmm</td><td>0,017</td><td></td><td>M</td><td>210</td><td>^{+0,1}_{-0,1}</td><td>Cmm</td><td>209,983</td></tr><tr><td>//</td><td>t</td><td>0,045</td><td></td><td>Cmm</td><td>0,001</td><td></td><td>O2</td><td>30</td><td colspan="2">Ø D</td><td>Cr</td></tr><tr><td>//</td><td>u</td><td>0,03</td><td></td><td>Cmm</td><td>0,004</td><td></td><td>P21</td><td>75</td><td colspan="2">Ø S</td><td>Cr</td></tr><tr><td>//</td><td>v</td><td>0,045</td><td></td><td>Cmm</td><td>0,001</td><td></td><td>P22</td><td>75</td><td colspan="2">Ø Y</td><td>Pg</td></tr><tr><td></td><td>W</td><td>115</td><td></td><td>Cmm</td><td>114,999</td><td>Ø</td><td>T</td><td>M16</td><td colspan="2"></td><td></td></tr><tr><td>//</td><td>w</td><td>0,03</td><td></td><td>Cmm</td><td>0,003</td><td colspan="4">OUTPUT PINION</td><td colspan="2" rowspan="2"></td></tr><tr><td></td><td>X</td><td>115</td><td></td><td>Cmm</td><td>114,012</td><td colspan="2">Pinion 1</td><td>P1559</td><td colspan="3"></td></tr><tr><td>//</td><td>x</td><td>0,03</td><td></td><td>Cmm</td><td>0,004</td><td colspan="4">Span dimension over 4 teeth</td><td colspan="2"></td></tr><tr><td></td><td>H</td><td>230</td><td>^{+0,025}_{-0,025}</td><td>Cmm</td><td>230,011</td><td colspan="2">G1</td><td>44,27</td><td>⁰_{-0,03}</td><td>Cmm</td><td>44,255</td></tr><tr><td>//</td><td>h</td><td>0,02</td><td></td><td>Cmm</td><td>0,008</td><td colspan="2">g1</td><td>0,022</td><td></td><td>Di</td><td>0,02</td></tr><tr><td></td><td>V1</td><td>298</td><td></td><td>Cmm</td><td>298,13</td><td colspan="2">Pinion 2</td><td>P1561</td><td colspan="3"></td></tr><tr><td></td><td>L1</td><td>85</td><td></td><td>Cmm</td><td>84,965</td><td colspan="4">Span dimension over 4 teeth</td><td colspan="2"></td></tr><tr><td></td><td>V2</td><td>298</td><td></td><td>Cmm</td><td>298,26</td><td colspan="2">G2</td><td>44,27</td><td>⁰_{-0,03}</td><td>Cmm</td><td>44,255</td></tr><tr><td></td><td>L2</td><td>85</td><td></td><td>Cmm</td><td>84,958</td><td colspan="2">g2</td><td>0,022</td><td></td><td>Di</td><td>0,01</td></tr><tr><td>Ø</td><td>Q1</td><td>25</td><td>^{+0,009}_{-0,004}</td><td>Cmm</td><td>25</td><td colspan="4">No-load input torque</td><td colspan="2" rowspan="5"></td></tr><tr><td>Ø</td><td>Q2</td><td>25</td><td>^{+0,009}_{-0,004}</td><td>Cmm</td><td>25</td><td colspan="2">Line</td><td>0,7 Nm</td><td colspan="3"></td></tr><tr><td></td><td>J1</td><td></td><td>/O</td><td>µm</td><td>0</td><td colspan="2">Line 2</td><td>0,7 Nm</td><td colspan="3"></td></tr><tr><td></td><td>J2</td><td></td><td>/O</td><td>µm</td><td>0,03</td><td colspan="6"></td></tr><tr><td></td><td>J3</td><td></td><td>/O</td><td>µm</td><td>0,03</td><td colspan="6"></td></tr></table>			HOUSING				HOUSING				MOTOR FLANGE						requirement		measure			requirement	measure	requirement		measure					L4031			O1	30			-		E	460	⁰ _{-0,05}	Cmm	459,97		P11	75	Ø B		µm		G	560	^{+0,1} _{-0,1}	Cmm	560,03		P12	75	Ø C		µm	//	g	0,045		Cmm	0,017		M	210	^{+0,1} _{-0,1}	Cmm	209,983	//	t	0,045		Cmm	0,001		O2	30	Ø D		Cr	//	u	0,03		Cmm	0,004		P21	75	Ø S		Cr	//	v	0,045		Cmm	0,001		P22	75	Ø Y		Pg		W	115		Cmm	114,999	Ø	T	M16				//	w	0,03		Cmm	0,003	OUTPUT PINION							X	115		Cmm	114,012	Pinion 1		P1559				//	x	0,03		Cmm	0,004	Span dimension over 4 teeth							H	230	^{+0,025} _{-0,025}	Cmm	230,011	G1		44,27	⁰ _{-0,03}	Cmm	44,255	//	h	0,02		Cmm	0,008	g1		0,022		Di	0,02		V1	298		Cmm	298,13	Pinion 2		P1561					L1	85		Cmm	84,965	Span dimension over 4 teeth							V2	298		Cmm	298,26	G2		44,27	⁰ _{-0,03}	Cmm	44,255		L2	85		Cmm	84,958	g2		0,022		Di	0,01	Ø	Q1	25	^{+0,009} _{-0,004}	Cmm	25	No-load input torque						Ø	Q2	25	^{+0,009} _{-0,004}	Cmm	25	Line		0,7 Nm					J1		/O	µm	0	Line 2		0,7 Nm					J2		/O	µm	0,03								J3		/O	µm	0,03						
HOUSING				HOUSING				MOTOR FLANGE																																																																																																																																																																																																																																																																																										
		requirement		measure			requirement	measure	requirement		measure																																																																																																																																																																																																																																																																																							
				L4031			O1	30			-																																																																																																																																																																																																																																																																																							
	E	460	⁰ _{-0,05}	Cmm	459,97		P11	75	Ø B		µm																																																																																																																																																																																																																																																																																							
	G	560	^{+0,1} _{-0,1}	Cmm	560,03		P12	75	Ø C		µm																																																																																																																																																																																																																																																																																							
//	g	0,045		Cmm	0,017		M	210	^{+0,1} _{-0,1}	Cmm	209,983																																																																																																																																																																																																																																																																																							
//	t	0,045		Cmm	0,001		O2	30	Ø D		Cr																																																																																																																																																																																																																																																																																							
//	u	0,03		Cmm	0,004		P21	75	Ø S		Cr																																																																																																																																																																																																																																																																																							
//	v	0,045		Cmm	0,001		P22	75	Ø Y		Pg																																																																																																																																																																																																																																																																																							
	W	115		Cmm	114,999	Ø	T	M16																																																																																																																																																																																																																																																																																										
//	w	0,03		Cmm	0,003	OUTPUT PINION																																																																																																																																																																																																																																																																																												
	X	115		Cmm	114,012	Pinion 1		P1559																																																																																																																																																																																																																																																																																										
//	x	0,03		Cmm	0,004	Span dimension over 4 teeth																																																																																																																																																																																																																																																																																												
	H	230	^{+0,025} _{-0,025}	Cmm	230,011	G1		44,27	⁰ _{-0,03}	Cmm	44,255																																																																																																																																																																																																																																																																																							
//	h	0,02		Cmm	0,008	g1		0,022		Di	0,02																																																																																																																																																																																																																																																																																							
	V1	298		Cmm	298,13	Pinion 2		P1561																																																																																																																																																																																																																																																																																										
	L1	85		Cmm	84,965	Span dimension over 4 teeth																																																																																																																																																																																																																																																																																												
	V2	298		Cmm	298,26	G2		44,27	⁰ _{-0,03}	Cmm	44,255																																																																																																																																																																																																																																																																																							
	L2	85		Cmm	84,958	g2		0,022		Di	0,01																																																																																																																																																																																																																																																																																							
Ø	Q1	25	^{+0,009} _{-0,004}	Cmm	25	No-load input torque																																																																																																																																																																																																																																																																																												
Ø	Q2	25	^{+0,009} _{-0,004}	Cmm	25	Line		0,7 Nm																																																																																																																																																																																																																																																																																										
	J1		/O	µm	0	Line 2		0,7 Nm																																																																																																																																																																																																																																																																																										
	J2		/O	µm	0,03																																																																																																																																																																																																																																																																																													
	J3		/O	µm	0,03																																																																																																																																																																																																																																																																																													
Date: 01/12/2015		Visa: J ONGANER																																																																																																																																																																																																																																																																																																
Version: A																																																																																																																																																																																																																																																																																																		

REDEX
ANDANTEX

ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr