

DRP		Page
Performance sheet	RX183/005-B	1/2
CUSTOMER:	YUKON CNC MACHINERY CO LT	CUSTOMER ORDER REF: RX104313T YUKON
DISTRIBUTOR:		REDEX ORDER REF: 209909
DESIGNATION:	DRP2+R.31.4.H	SERIAL NUMBER: 897967
CODE:	RX128950-12	MOTOR FLANGE CODE:

Mechanical preload data

The preload torque of the gearbox in DUALDRIVE configuration depends on the application data and features of the gearbox.

The preload torque can be increased but must never exceed the maximum value indicated below.

A too important preload torque reduces the efficiency and the life expectancy of the gearbox and the rack.

Optimal preload torque Tp:

Following application

Maximum preload torque:

18,7 Nm

For the installation, please refer to User Manual DRP (182/009)

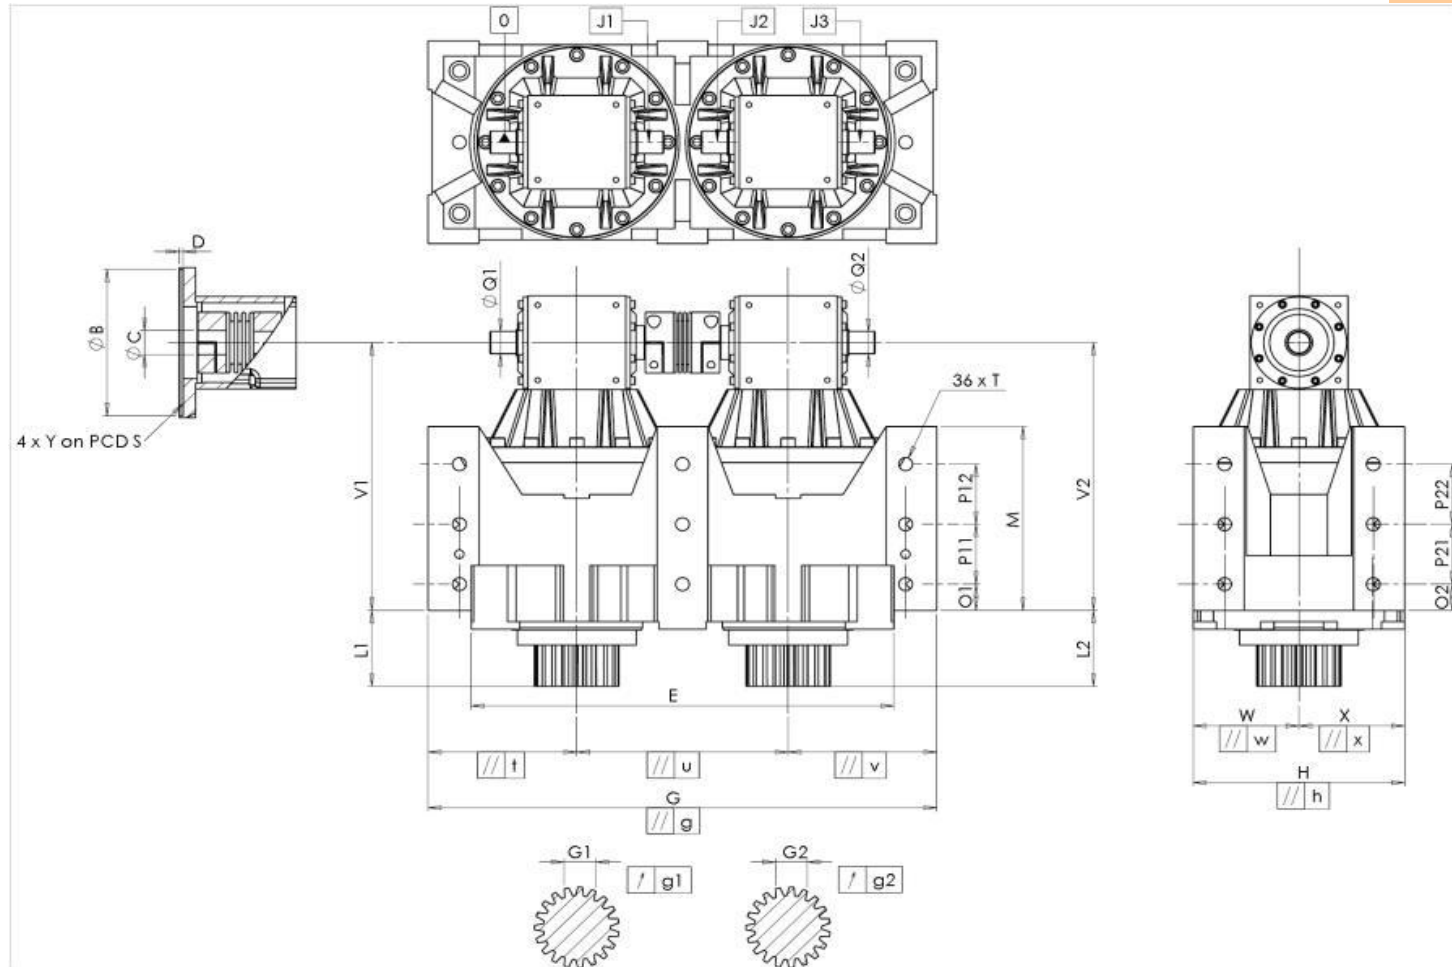
SPECIFIC REMARKS:

Product images are for illustrative purposes only.

REDEX
ANDANTEX

ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr

DRP		Page																																																																																																																																																																																																																																																																																																	
Performance sheet		RX183/005-B																																																																																																																																																																																																																																																																																																	
		2/2																																																																																																																																																																																																																																																																																																	
EXTERNAL DIMENSIONS & INTERFACES:		SN: 897967																																																																																																																																																																																																																																																																																																	
																																																																																																																																																																																																																																																																																																			
General tolerance: Js13		Cmm	Automatic / manual coordinate-measuring machine																																																																																																																																																																																																																																																																																																
		µm	Micrometer																																																																																																																																																																																																																																																																																																
		Cr	Calliper rule																																																																																																																																																																																																																																																																																																
		Di	Dial indicator																																																																																																																																																																																																																																																																																																
		Pg	Plug gauge																																																																																																																																																																																																																																																																																																
<table><tr><th colspan="4">HOUSING</th><th colspan="4">HOUSING</th><th colspan="4">MOTOR FLANGE</th></tr><tr><th colspan="2"></th><th colspan="2">requirement</th><th>measure</th><th colspan="2"></th><th>requirement</th><th>measure</th><th colspan="2">requirement</th><th>measure</th></tr><tr><td></td><td></td><td></td><td></td><td>L0797</td><td></td><td></td><td>O1</td><td>30</td><td>Cr</td><td>30</td><td>-</td></tr><tr><td></td><td></td><td>E</td><td>460⁰_{-0,05}</td><td>Cmm</td><td>459,98</td><td></td><td>P11</td><td>75</td><td>Cr</td><td>75</td><td></td></tr><tr><td></td><td></td><td>G</td><td>560^{+0,1}_{-0,1}</td><td>Cmm</td><td>559,986</td><td></td><td>P12</td><td>75</td><td>Cr</td><td>75</td><td></td></tr><tr><td>//</td><td></td><td>g</td><td>0,045</td><td>Cmm</td><td>0,026</td><td></td><td>M</td><td>210^{+0,1}_{-0,1}</td><td>Cmm</td><td>209,954</td><td></td></tr><tr><td>//</td><td></td><td>t</td><td>0,045</td><td>Cmm</td><td>0,003</td><td></td><td>O2</td><td>30</td><td>Cr</td><td>30</td><td></td></tr><tr><td>//</td><td></td><td>u</td><td>0,03</td><td>Cmm</td><td>0,005</td><td></td><td>P21</td><td>75</td><td>Cr</td><td>75</td><td></td></tr><tr><td>//</td><td></td><td>v</td><td>0,045</td><td>Cmm</td><td>0,003</td><td></td><td>P22</td><td>75</td><td>Cr</td><td>75</td><td></td></tr><tr><td></td><td></td><td>W</td><td>115</td><td>Cmm</td><td>115</td><td></td><td>Ø</td><td>T</td><td>M16</td><td>Pg</td><td>M16</td></tr><tr><td>//</td><td></td><td>w</td><td>0,03</td><td>Cmm</td><td>0,007</td><td colspan="4">OUTPUT PINION</td><td></td><td></td></tr><tr><td></td><td></td><td>X</td><td>115</td><td>Cmm</td><td>114,983</td><td colspan="2">Pinion 1</td><td colspan="2">P1568</td><td></td><td></td></tr><tr><td>//</td><td></td><td>x</td><td>0,03</td><td>Cmm</td><td>0,005</td><td colspan="4">Span dimension over 4 teeth</td><td></td><td></td></tr><tr><td></td><td></td><td>H</td><td>230^{+0,025}_{-0,025}</td><td>Cmm</td><td>229,983</td><td></td><td>G1</td><td>44,27⁰_{-0,03}</td><td>Cmm</td><td>44,26</td><td></td></tr><tr><td>//</td><td></td><td>h</td><td>0,02</td><td>Cmm</td><td>0,013</td><td>↗</td><td>g1</td><td>0,022</td><td>Di</td><td>0,01</td><td></td></tr><tr><td></td><td></td><td>V1</td><td>298</td><td>Cmm</td><td>298,47</td><td colspan="2">Pinion 2</td><td colspan="2">P1566</td><td></td><td></td></tr><tr><td></td><td></td><td>L1</td><td>85</td><td>Cmm</td><td>85,016</td><td colspan="4">Span dimension over 4 teeth</td><td></td><td></td></tr><tr><td></td><td></td><td>V2</td><td>298</td><td>Cmm</td><td>298,22</td><td></td><td>G2</td><td>44,27⁰_{-0,03}</td><td>Cmm</td><td>44,255</td><td></td></tr><tr><td></td><td></td><td>L2</td><td>85</td><td>Cmm</td><td>85</td><td>↗</td><td>g2</td><td>0,022</td><td>Di</td><td>0,02</td><td></td></tr><tr><td>Ø</td><td></td><td>Q1</td><td>25^{+0,009}_{-0,004}</td><td>Cmm</td><td>25,005</td><td colspan="4">No-load input torque</td><td></td><td></td></tr><tr><td>Ø</td><td></td><td>Q2</td><td>25^{+0,009}_{-0,004}</td><td>Cmm</td><td>25</td><td colspan="2">Line</td><td colspan="2">1,5 Nm</td><td></td><td></td></tr><tr><td></td><td></td><td>J1</td><td>/O</td><td>µm</td><td>0</td><td colspan="2">Line 2</td><td colspan="2">1,5 Nm</td><td></td><td></td></tr><tr><td></td><td></td><td>J2</td><td>/O</td><td>µm</td><td>0,02</td><td colspan="4"></td><td></td><td></td></tr><tr><td></td><td></td><td>J3</td><td>/O</td><td>µm</td><td>0,03</td><td colspan="4"></td><td></td><td></td></tr></table>				HOUSING				HOUSING				MOTOR FLANGE						requirement		measure			requirement	measure	requirement		measure					L0797			O1	30	Cr	30	-			E	460 ⁰ _{-0,05}	Cmm	459,98		P11	75	Cr	75				G	560 ^{+0,1} _{-0,1}	Cmm	559,986		P12	75	Cr	75		//		g	0,045	Cmm	0,026		M	210 ^{+0,1} _{-0,1}	Cmm	209,954		//		t	0,045	Cmm	0,003		O2	30	Cr	30		//		u	0,03	Cmm	0,005		P21	75	Cr	75		//		v	0,045	Cmm	0,003		P22	75	Cr	75				W	115	Cmm	115		Ø	T	M16	Pg	M16	//		w	0,03	Cmm	0,007	OUTPUT PINION								X	115	Cmm	114,983	Pinion 1		P1568				//		x	0,03	Cmm	0,005	Span dimension over 4 teeth								H	230 ^{+0,025} _{-0,025}	Cmm	229,983		G1	44,27 ⁰ _{-0,03}	Cmm	44,26		//		h	0,02	Cmm	0,013	↗	g1	0,022	Di	0,01				V1	298	Cmm	298,47	Pinion 2		P1566						L1	85	Cmm	85,016	Span dimension over 4 teeth								V2	298	Cmm	298,22		G2	44,27 ⁰ _{-0,03}	Cmm	44,255				L2	85	Cmm	85	↗	g2	0,022	Di	0,02		Ø		Q1	25 ^{+0,009} _{-0,004}	Cmm	25,005	No-load input torque						Ø		Q2	25 ^{+0,009} _{-0,004}	Cmm	25	Line		1,5 Nm						J1	/O	µm	0	Line 2		1,5 Nm						J2	/O	µm	0,02									J3	/O	µm	0,03						
HOUSING				HOUSING				MOTOR FLANGE																																																																																																																																																																																																																																																																																											
		requirement		measure			requirement	measure	requirement		measure																																																																																																																																																																																																																																																																																								
				L0797			O1	30	Cr	30	-																																																																																																																																																																																																																																																																																								
		E	460 ⁰ _{-0,05}	Cmm	459,98		P11	75	Cr	75																																																																																																																																																																																																																																																																																									
		G	560 ^{+0,1} _{-0,1}	Cmm	559,986		P12	75	Cr	75																																																																																																																																																																																																																																																																																									
//		g	0,045	Cmm	0,026		M	210 ^{+0,1} _{-0,1}	Cmm	209,954																																																																																																																																																																																																																																																																																									
//		t	0,045	Cmm	0,003		O2	30	Cr	30																																																																																																																																																																																																																																																																																									
//		u	0,03	Cmm	0,005		P21	75	Cr	75																																																																																																																																																																																																																																																																																									
//		v	0,045	Cmm	0,003		P22	75	Cr	75																																																																																																																																																																																																																																																																																									
		W	115	Cmm	115		Ø	T	M16	Pg	M16																																																																																																																																																																																																																																																																																								
//		w	0,03	Cmm	0,007	OUTPUT PINION																																																																																																																																																																																																																																																																																													
		X	115	Cmm	114,983	Pinion 1		P1568																																																																																																																																																																																																																																																																																											
//		x	0,03	Cmm	0,005	Span dimension over 4 teeth																																																																																																																																																																																																																																																																																													
		H	230 ^{+0,025} _{-0,025}	Cmm	229,983		G1	44,27 ⁰ _{-0,03}	Cmm	44,26																																																																																																																																																																																																																																																																																									
//		h	0,02	Cmm	0,013	↗	g1	0,022	Di	0,01																																																																																																																																																																																																																																																																																									
		V1	298	Cmm	298,47	Pinion 2		P1566																																																																																																																																																																																																																																																																																											
		L1	85	Cmm	85,016	Span dimension over 4 teeth																																																																																																																																																																																																																																																																																													
		V2	298	Cmm	298,22		G2	44,27 ⁰ _{-0,03}	Cmm	44,255																																																																																																																																																																																																																																																																																									
		L2	85	Cmm	85	↗	g2	0,022	Di	0,02																																																																																																																																																																																																																																																																																									
Ø		Q1	25 ^{+0,009} _{-0,004}	Cmm	25,005	No-load input torque																																																																																																																																																																																																																																																																																													
Ø		Q2	25 ^{+0,009} _{-0,004}	Cmm	25	Line		1,5 Nm																																																																																																																																																																																																																																																																																											
		J1	/O	µm	0	Line 2		1,5 Nm																																																																																																																																																																																																																																																																																											
		J2	/O	µm	0,02																																																																																																																																																																																																																																																																																														
		J3	/O	µm	0,03																																																																																																																																																																																																																																																																																														
Date: 01/12/2015		Visa: J ONGANER																																																																																																																																																																																																																																																																																																	
Version: A																																																																																																																																																																																																																																																																																																			