

DRP		Page
Performance sheet	RX183/005-B	1/2
CUSTOMER:	MHI	CUSTOMER ORDER REF: 150812-IB1 MHI
DISTRIBUTOR:	S & F INC	REDEX ORDER REF: 209990
DESIGNATION:	DRP4+P.46.4.H	SERIAL NUMBER: 898106
CODE:	RX130917-13	MOTOR FLANGE CODE: RX129551-03

For the installation, please refer to User Manual DRP (182/009)

SPECIFIC REMARKS:

Product images are for illustrative purposes only.

DRP


Performance sheet

RX183/005-B

2/2

EXTERNAL DIMENSIONS & INTERFACES:

SN: 898106

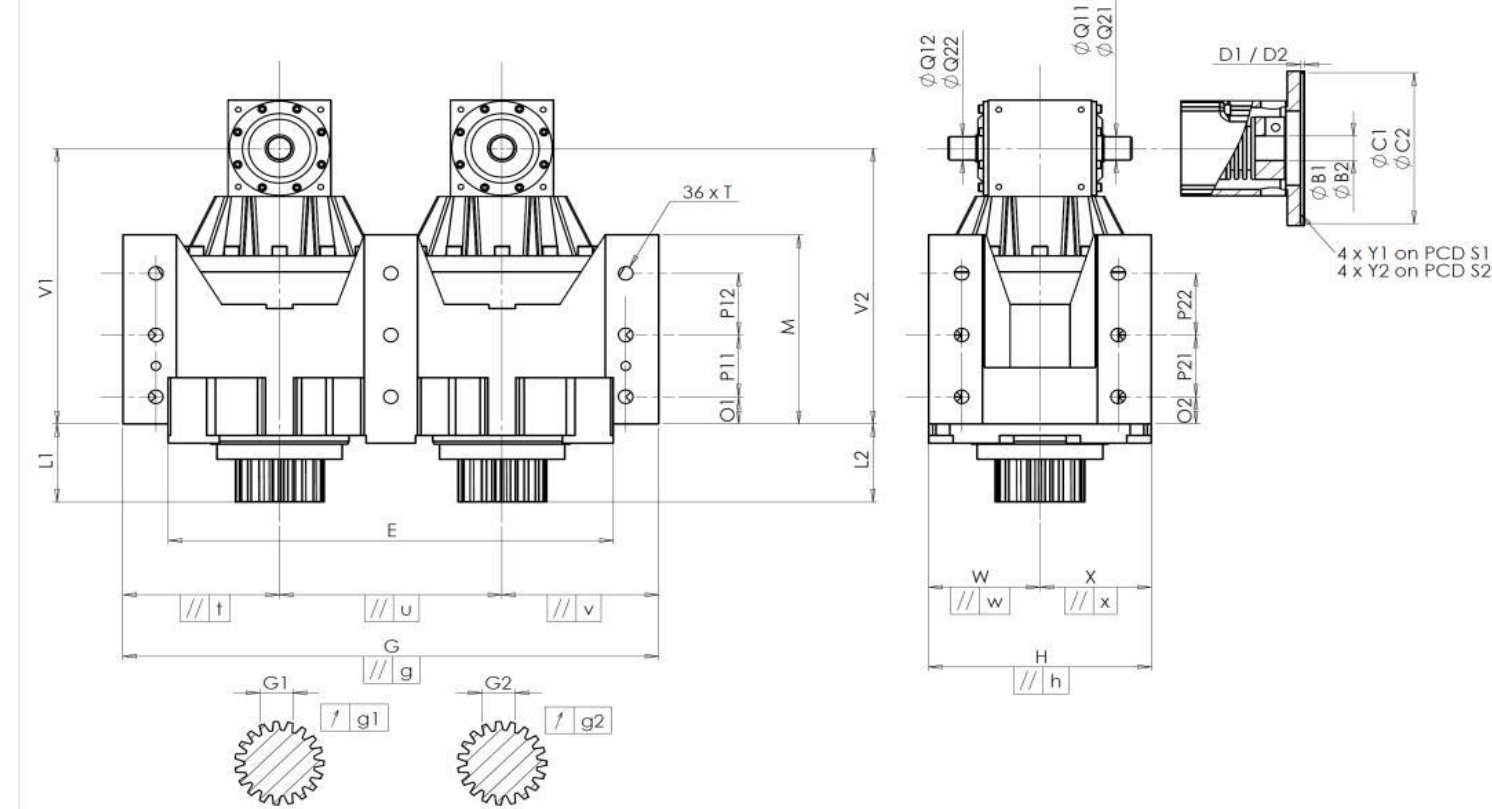

General tolerance: Js13	Cmm	Automatic / manual coordinate-measuring machine	µm	Micrometer	Cr	Calliper rule	Di	Dial indicator	Pg	Plug gauge		
HOUSING			HOUSING			MOTOR FLANGE						
requirement			measure			requirement			measure			
			K4609						L7616			
	E	640 ⁰ _{-0,1}	Cmm	639,979		O1	43	Cr	43			
	G	800 ^{+0,2} _{-0,2}	Cmm	800,142		P11	100	Cr	100	Ø	B1	
						P12	100	Cr	100	Ø	C1	
//	g	0,05	Cmm	0,032		M	288 ^{+0,1} _{-0,1}	Cmm	288,067		D1	
//	t	0,05	Cmm	0,006		O2	43	Cr	43	Ø	S1	
//	u	0,035	Cmm	0,013		P21	100	Cr	100	Ø	Y1	
//	v	0,05	Cmm	0,006		P22	100	Cr	100			
	W	160	Cmm	160,015	Ø	T	M24	Pg	M24			
//	w	0,04	Cmm	0,001	OUTPUT PINION							
	X	160	Cmm	160	Pinion 1			Q1760				
//	x	0,04	Cmm	0,002	Span dimension over 3 teeth							
	H	320 ^{+0,04} _{-0,04}	Cmm	320,015		G1	46,9 ⁰ _{-0,03}	Cmm	46,9			
//	h	0,02	Cmm	0,017	↑	g1	0,022	Di	0,015			
	V1	435	Cmm	435,275	Pinion 2			Q0105				
	L1	120	Cmm	120,08	Span dimension over 3 teeth							
	V2	435	Cmm	435,317		G2	46,9 ⁰ _{-0,03}	Cmm	46,89			
	L2	120	Cmm	119,964	↑	g2	0,022	Di	0,015			
Ø	Q11/Q12	35 ^{+0,011} _{-0,005}	Cmm	35,003	No-load input torque							
Ø	Q21/Q22	35 ^{+0,011} _{-0,005}	Cmm	34,998	Line 1			1,1 Nm				
				Line 2			1,7 Nm					
Date: 23/12/2015											Visa: JJ PELLE	
Version: A												
REDEX ANDANTEX											ZI-BP79 F45210 FERRIERES www.redex.fr	
											Tel: +33 2 38 94 42 00 Fax: +33 2 38 94 42 99 Email: info@redex.fr	