

KRPX		Page
Performance sheet	RX183-007-D	1/2
CUSTOMER:	BOST MACHINE TOOLS	CUSTOMER ORDER REF: 76538 BOST MACHINE TOOLS
DISTRIBUTOR:		REDEX ORDER REF: 210308
DESIGNATION:	KRPX3+R.61.4.H	SERIAL NUMBER: 898504
CODE:	RX131965-32	MOTOR FLANGE CODE: RX129474-03

For the installation, please refer to User Manual KRPX (182/010)

SPECIFIC REMARKS:

Product images are for illustrative purposes only.

KRPX


Performance sheet

RX183-007-D

2/2

EXTERNAL DIMENSIONS & INTERFACES:

SN: 898504

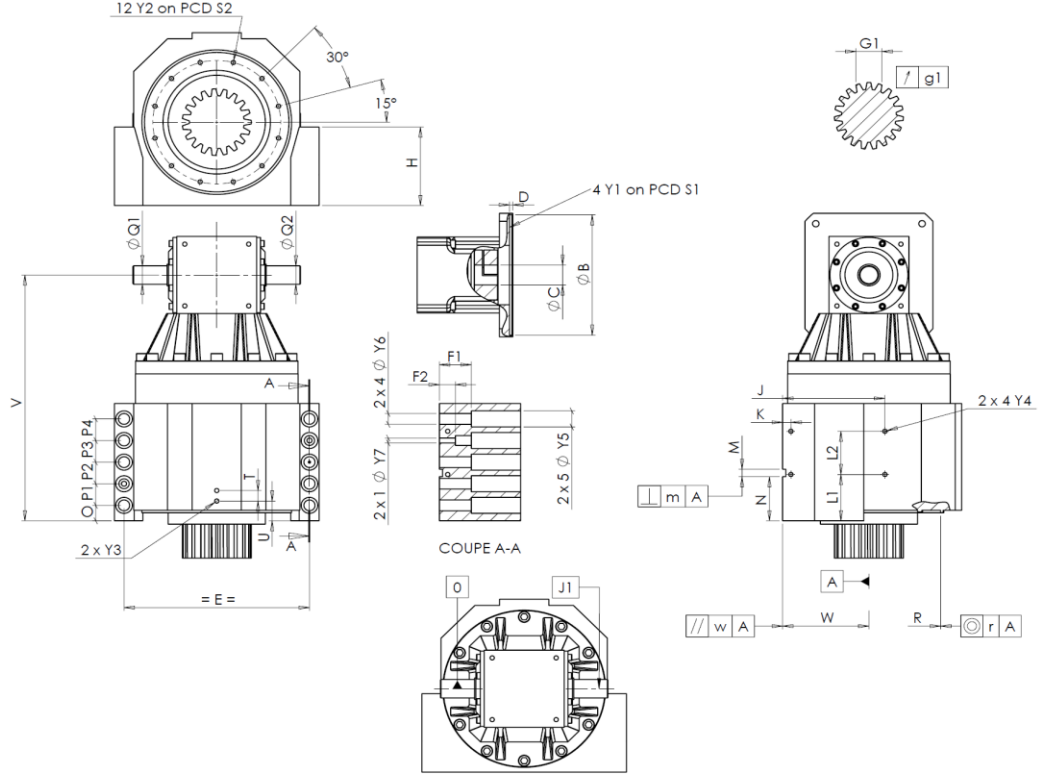

General tolerance: Js13	Cmm	Automatic / manual coordinate-measuring machine	µm	Micrometer	Cr	Calliper rule	Di	Dial indicator	Pg	Plug gauge								
HOUSING				HOUSING				MOTOR FLANGE										
requirement				measure				requirement				measure						
				L4989								L3880						
	Y2	M8x15	Pg	OK		L1	75	Cr	75		Ø	B	180	+0,054 +0,014	µm	180.03		
Ø	S2	200	+0,1 -0,1	Cr	200		J	160	Cr	160		Ø	C	38	+0,05 +0,025	µm	38.04	
	V	398		µm	397.71		K	13	Cr	13			D	8		Cr	8.09	
	E	290		Cr	290	2 x 4Ø	Y4	M8x15	Pg	OK		Ø	S1	215		Cr	215	
	O	25		Cr	25		F1	50	Cr	50		Ø	Y1	M12		Pg	OK	
	P1	35		Cr	35		F2	25	Cr	25	No-load input torque							
	P2	35		Cr	35	2 x 1Ø	Y7	12	µm	12	Line 1							0,8 Nm
	P3	35		Cr	35	2 x 4Ø	Y6	17,5	µm	17.5								
	P4	35		Cr	35	2 x 5Ø	Y5	26	µm	26								
	T	17		Cr	17		M H6	12	+0,011 0	Cmm	12,001			Line	Stiffness			
	U	32		Cr	32	⊥	m	0,05		Cmm	0,006	Torsional stiffness (Nm/arcmin)		1	473,03			
2 x 1Ø	Y3	M8x15	Pg	OK			N	71,5	+0,1 -0,1	Cmm	71,528	Radial stiffness (N/µm)		1	901			
	R	226	+0,2 +0,1	Cmm	226,163	A	W	135	+0,035 -0,035	Cmm	135,004							
⊙	r	0,1		Cmm	0,039	//	w	0,03	/A	Cmm	0,003							
Ø	Q1	30	+0,009 -0,004	µm	29.996	OUTPUT PINION						Noise level						
Ø	Q2	30	+0,009 -0,004	µm	29.996	P1032						@1600 rpm input (dB(A))			66,5			
	J1		/0	µm	0,015	Span dimension over 3 teeth												
							G1	39,25	0 -0,03	Cmm	39,23							
							g1	0,022		Di	0,01							

Date: 26/02/2016

Visa: J ONGANER

Version: A



REDEX
ANDANTEX

ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr