


INTERFACCE E DIMENSIONI ESTERNE:	SN:	899406
----------------------------------	-----	--------

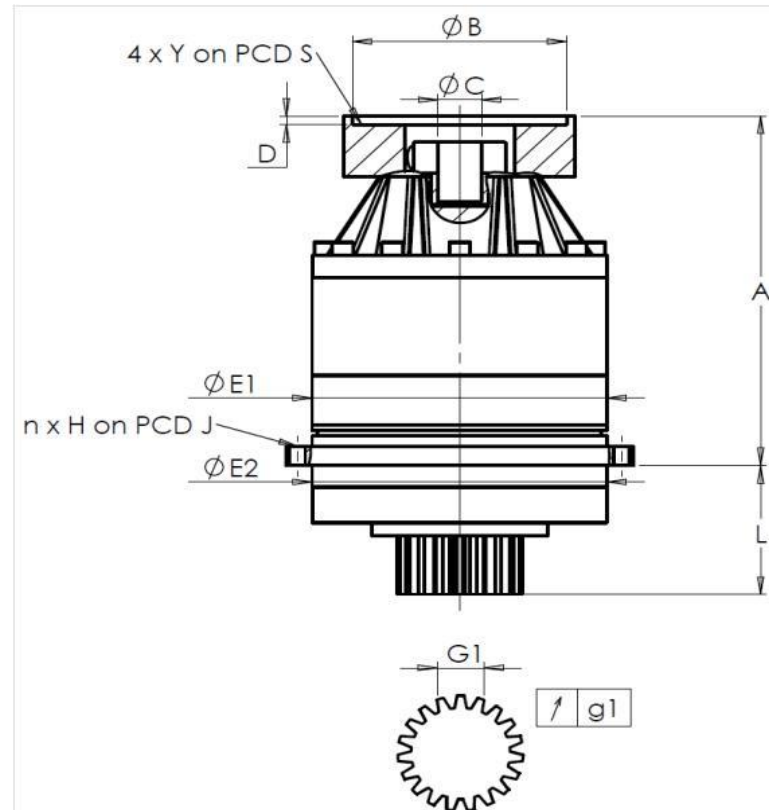

General tolerance: Js13	<i>Cmm</i>	Automatic / manual coordinate-measuring machine	μm	Micrometer	<i>Cr</i>	Calliper rule	<i>Di</i>	Dial indicator	<i>Pg</i>	Plug gauge
-------------------------	------------	--	---------------	------------	-----------	---------------	-----------	----------------	-----------	------------

CASSA ESTERNA						PIGNONE IN USCITA						FLANGIA DEL MOTORE								
		richiesta			misurata				richiesta			misurata				richiesta			misurata	
					M5400							O1030								
		E1	212h ⁰ _{-0,046}	μm	211.99		Scostamento (su 4 denti)						Ø	B	181	μm	180.94			
		E2	200h ⁰ _{-0,046}	μm	199.99			G1	44,27 ⁰ _{-0,03}	Cmm	44.255		Ø	C	38 ^{+0,05} _{+0,025}	μm	38.03			
n x H on PCD J		12 Ø9 on PCD 233		Cr	OK		↗	g1	0,022	Di	0,015			D	8	Cr	8.49			
				Cr						Ø	S1	215	Cr	215						
		A	288	μm	289.01		Coppia in ingresso a vuoto						Ø	Y1	M12	Pg	OK			
		L	94	μm	93.97		linea 1			0.4 Nm										

		Linea	Rigidità	@2100 rpm entrata (dB(A))	65,5
	Rigidità torsionale (Nm/arcmin)	1	243,75		
	Rigidità radiale (N/μm)	1	502		

Per l'installazione, fare riferimento al manuale d'uso KRP (182/008)

OSSERVAZIONE SPECIFICA:

Date: 12/10/2016

Visa: J ONGANER

Version: A

Le immagini dei prodotti sono a carattere puramente illustrativo