


EXTERNAL DIMENSIONS & INTERFACES:	SN:	900559
-----------------------------------	-----	--------

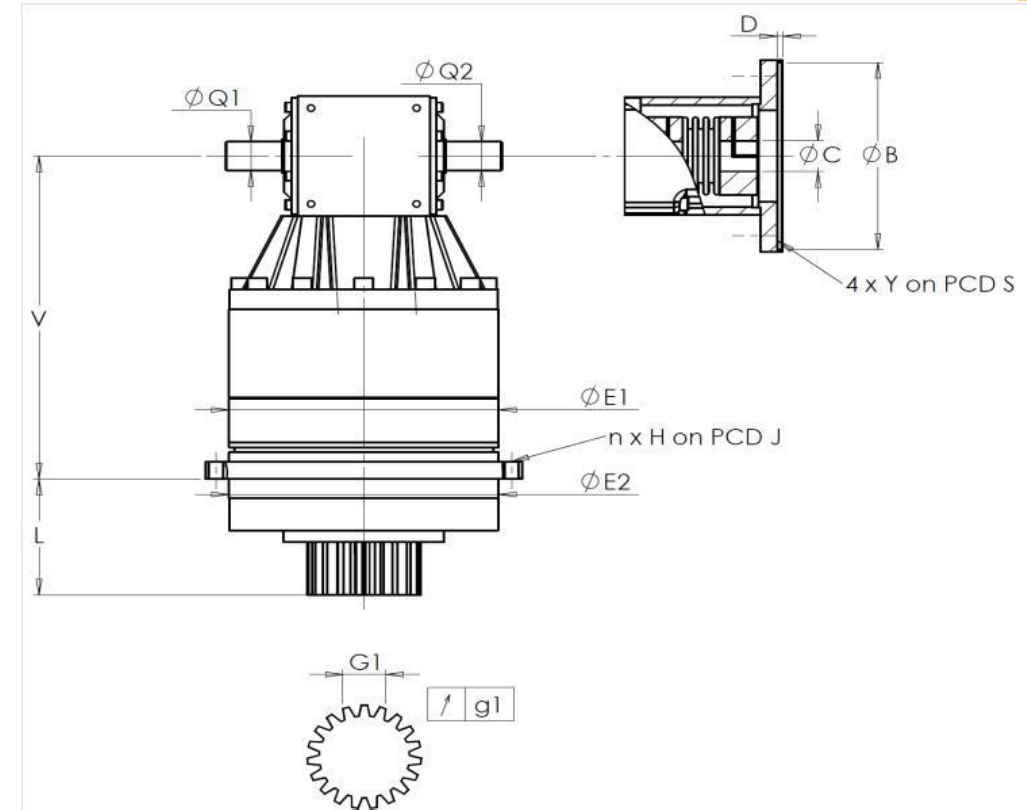

General tolerance: Js13	<i>Cmm</i>	Automatic / manual coordinate-measuring machine	μm	Micrometer	<i>Cr</i>	Calliper rule	<i>Di</i>	Dial indicator	<i>Pg</i>	Plug gauge
-------------------------	------------	--	---------------	------------	-----------	---------------	-----------	----------------	-----------	------------

HOUSING						OUTPUT PINION						MOTOR FLANGE					
requirement			measure			requirement			measure			requirement			measure		
			A3217						N0615						-		
	E1	212h7 ⁰ _{-0,046}	μm	211.97	Span dimension over 4 teeth						∅	B		μm			
	E2	200h7 ⁰ _{-0,046}	μm	199.98		G1	44,27 ⁰ _{-0,03}	Cmm	44.245	∅	C		μm				
n x H on PCD J		12 Ø9 on PCD 233	Cr	OK	↗	g1	0,022	Di	0,01		D		Cr				
			Cr						∅	S1		Cr					
	V	289	μm	289.34	No-load input torque						∅	Y1		Pg			
	L	94	μm	93.93	Line 1			1 Nm									
∅	Q1	25 ^{+0,009} _{-0,004}	μm	25.005							Noise level						
∅	Q2	25 ^{+0,009} _{-0,004}	μm	25			Line	Stiffness			@2100 rpm input (dB(A))			72,0			
					Torsional stiffness (Nm/arcmin)		1	243,75									
					Radial stiffness (N/μm)		1	541									

Visa: JJ PELLÉ p.o. JP MOZZICONACCI

CONACCI

REDEX

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr

REDEX

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr