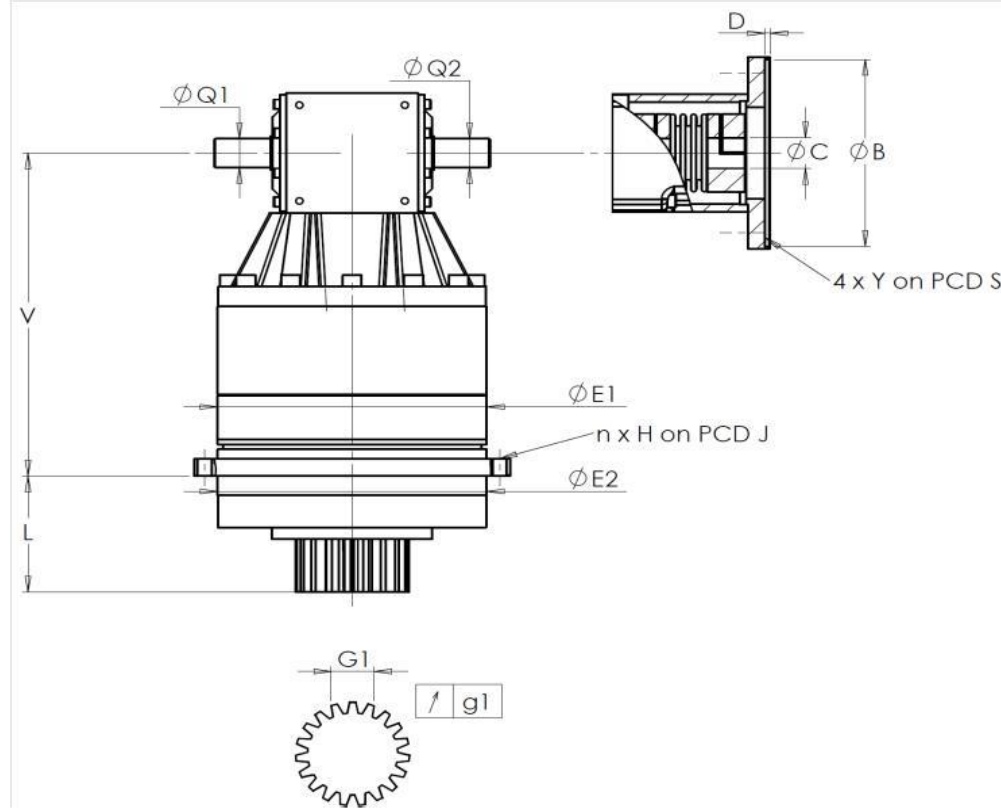
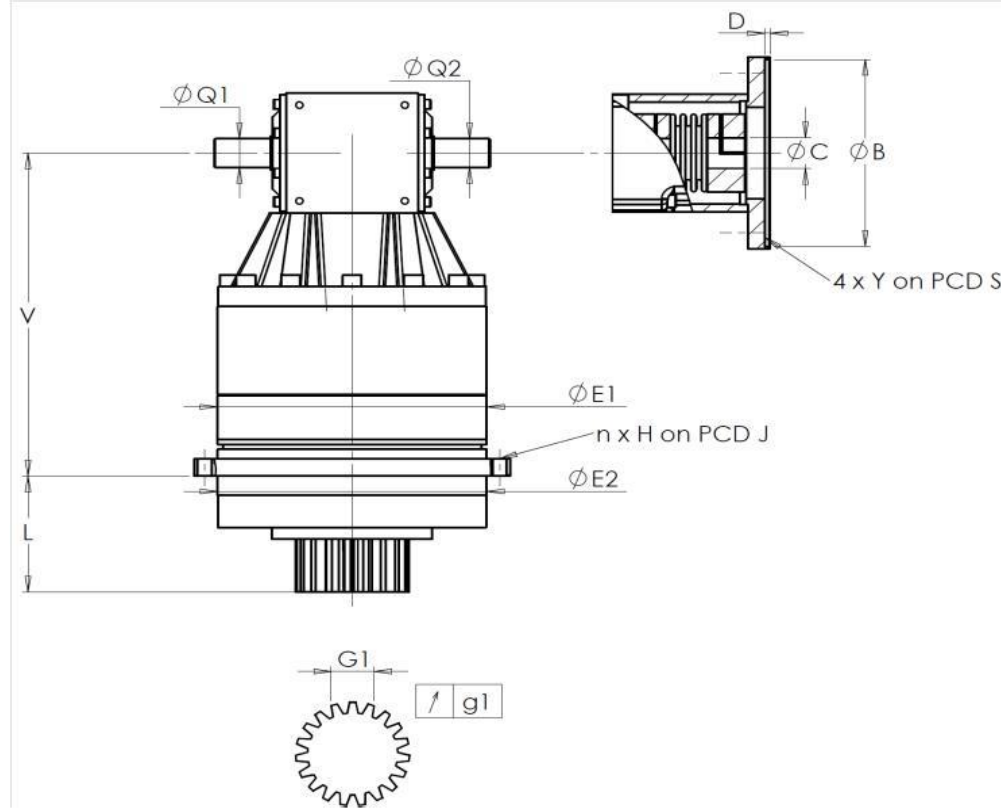


KRP				Page																																																																																																																																																							
PERFORMANCE SHEET		RX183-006-A		1/2																																																																																																																																																							
CUSTOMER:	FOSHAN FOWEI	CUSTOMER ORDER REF:	GCN004289 FOSHAN FOWEI																																																																																																																																																								
DISTRIBUTOR:	SHANGHAI GUDEL AUTOMATIO	REDEX ORDER REF:	213023																																																																																																																																																								
DESIGNATION:	KRP1+R.31.4.H	SERIAL NUMBER:	902330																																																																																																																																																								
CODE:	RX129591-12	MOTOR FLANGE CODE:	RX129592-06																																																																																																																																																								
For the installation, please refer to User Manual KRP (182/008)																																																																																																																																																											
						EXTERNAL DIMENSIONS & INTERFACES:																																																																																																																																																					
																																																																																																																																																											
						General tolerance: Js13 Cmm Automatic / manual coordinate-measuring machine μm Micrometer Cr Calliper rule Di Dial indicator Pg Plug gauge																																																																																																																																																					
						<table><tr><th colspan="4">HOUSING</th><th colspan="4">OUTPUT PINION</th><th colspan="4">MOTOR FLANGE</th></tr><tr><th colspan="2">requirement</th><th colspan="2">measure</th><th colspan="2">requirement</th><th colspan="2">measure</th><th colspan="2">requirement</th><th colspan="2">measure</th></tr><tr><td colspan="2"></td><td colspan="2">B4965</td><td colspan="2"></td><td colspan="2">M2344</td><td colspan="2"></td><td colspan="2">B4865</td></tr><tr><td>E1</td><td>152h7⁰_{-0,04} μm</td><td colspan="2">151,975</td><td colspan="4">Span dimension over 3 teeth</td><td>Ø</td><td>B</td><td>110G7^{+0,047}_{+0,012} μm</td><td>110,035</td></tr><tr><td>E2</td><td>140h7⁰_{-0,04} μm</td><td colspan="2">139,985</td><td>G1</td><td>23,28⁰_{-0,03} Cmm</td><td colspan="2">23,26</td><td>Ø</td><td>C</td><td>24F7^{+0,041}_{+0,020} μm</td><td>24,04</td></tr><tr><td>n x H on PCD J</td><td>12 Ø6,5 on PCD 168</td><td>Cr</td><td>12 Ø6,5 on PCD 168</td><td>g1</td><td>0,021 Di</td><td colspan="2">0,01</td><td></td><td>D</td><td>5</td><td>Cr 5,085</td></tr><tr><td>V</td><td>228,5 μm</td><td colspan="2">228,22</td><td colspan="4">No-load input torque</td><td>Ø</td><td>S1</td><td>145</td><td>Cr 145,015</td></tr><tr><td>L</td><td>71 μm</td><td colspan="2">70,75</td><td colspan="4">Line 1</td><td colspan="2">0,2 Nm</td><td>Ø</td><td>Y1 M8 Pg M8</td></tr><tr><td>Ø Q1</td><td>20^{+0,009}_{-0,004} μm</td><td colspan="2">20,005</td><td colspan="4"></td><td colspan="4">Noise level</td></tr><tr><td>Ø Q2</td><td>20^{+0,009}_{-0,004} μm</td><td colspan="2">20,005</td><td colspan="4"></td><td colspan="4">@1600 rpm input (dB(A)) 65,5</td></tr><tr><td colspan="4"></td><td colspan="2">Torsional stiffness (Nm/arcmin)</td><td>1</td><td colspan="2">81,39</td><td colspan="3"></td></tr><tr><td colspan="4"></td><td colspan="2">Radial stiffness (N/μm)</td><td>1</td><td colspan="2">314</td><td colspan="3"></td></tr></table>						HOUSING				OUTPUT PINION				MOTOR FLANGE				requirement		measure		requirement		measure		requirement		measure				B4965				M2344				B4865		E1	152h7 ⁰ _{-0,04} μm	151,975		Span dimension over 3 teeth				Ø	B	110G7 ^{+0,047} _{+0,012} μm	110,035	E2	140h7 ⁰ _{-0,04} μm	139,985		G1	23,28 ⁰ _{-0,03} Cmm	23,26		Ø	C	24F7 ^{+0,041} _{+0,020} μm	24,04	n x H on PCD J	12 Ø6,5 on PCD 168	Cr	12 Ø6,5 on PCD 168	g1	0,021 Di	0,01			D	5	Cr 5,085	V	228,5 μm	228,22		No-load input torque				Ø	S1	145	Cr 145,015	L	71 μm	70,75		Line 1				0,2 Nm		Ø	Y1 M8 Pg M8	Ø Q1	20 ^{+0,009} _{-0,004} μm	20,005						Noise level				Ø Q2	20 ^{+0,009} _{-0,004} μm	20,005						@1600 rpm input (dB(A)) 65,5								Torsional stiffness (Nm/arcmin)		1	81,39									Radial stiffness (N/μm)		1	314				
						HOUSING				OUTPUT PINION				MOTOR FLANGE																																																																																																																																													
						requirement		measure		requirement		measure		requirement		measure																																																																																																																																											
								B4965				M2344				B4865																																																																																																																																											
						E1	152h7 ⁰ _{-0,04} μm	151,975		Span dimension over 3 teeth				Ø	B	110G7 ^{+0,047} _{+0,012} μm	110,035																																																																																																																																										
						E2	140h7 ⁰ _{-0,04} μm	139,985		G1	23,28 ⁰ _{-0,03} Cmm	23,26		Ø	C	24F7 ^{+0,041} _{+0,020} μm	24,04																																																																																																																																										
n x H on PCD J	12 Ø6,5 on PCD 168	Cr	12 Ø6,5 on PCD 168	g1	0,021 Di	0,01			D	5	Cr 5,085																																																																																																																																																
V	228,5 μm	228,22		No-load input torque				Ø	S1	145	Cr 145,015																																																																																																																																																
L	71 μm	70,75		Line 1				0,2 Nm		Ø	Y1 M8 Pg M8																																																																																																																																																
Ø Q1	20 ^{+0,009} _{-0,004} μm	20,005						Noise level																																																																																																																																																			
Ø Q2	20 ^{+0,009} _{-0,004} μm	20,005						@1600 rpm input (dB(A)) 65,5																																																																																																																																																			
				Torsional stiffness (Nm/arcmin)		1	81,39																																																																																																																																																				
				Radial stiffness (N/μm)		1	314																																																																																																																																																				
Date: 09/10/2018 Visa: C DE MIRANDA																																																																																																																																																											
Version: A																																																																																																																																																											
Product images are for illustrative purposes only.																																																																																																																																																											
REDEX		ZI-BP79 F45210 FERRIERES www.redex.fr		Tel: +33 2 38 94 42 00 Fax: +33 2 38 94 42 99 Email: info@redex.fr																																																																																																																																																							

KRP				Page																																																																																																																																																	
PERFORMANCE SHEET		RX183-006-A		2/2																																																																																																																																																	
EXTERNAL DIMENSIONS & INTERFACES:																																																																																																																																																					
																																																																																																																																																					
General tolerance: Js13 Cmm Automatic / manual coordinate-measuring machine μm Micrometer Cr Calliper rule Di Dial indicator Pg Plug gauge																																																																																																																																																					
<table><tr><th colspan="4">HOUSING</th><th colspan="4">OUTPUT PINION</th><th colspan="4">MOTOR FLANGE</th></tr><tr><th colspan="2">requirement</th><th colspan="2">measure</th><th colspan="2">requirement</th><th colspan="2">measure</th><th colspan="2">requirement</th><th colspan="2">measure</th></tr><tr><td colspan="2"></td><td colspan="2">B4965</td><td colspan="2"></td><td colspan="2">M2344</td><td colspan="2"></td><td colspan="2">B4865</td></tr><tr><td>E1</td><td>152h7⁰_{-0,04} μm</td><td colspan="2">151,975</td><td colspan="4">Span dimension over 3 teeth</td><td>Ø</td><td>B</td><td>110G7^{+0,047}_{+0,012} μm</td><td>110,035</td></tr><tr><td>E2</td><td>140h7⁰_{-0,04} μm</td><td colspan="2">139,985</td><td>G1</td><td>23,28⁰_{-0,03} Cmm</td><td colspan="2">23,26</td><td>Ø</td><td>C</td><td>24F7^{+0,041}_{+0,020} μm</td><td>24,04</td></tr><tr><td>n x H on PCD J</td><td>12 Ø6,5 on PCD 168</td><td>Cr</td><td>12 Ø6,5 on PCD 168</td><td>g1</td><td>0,021 Di</td><td colspan="2">0,01</td><td></td><td>D</td><td>5</td><td>Cr 5,085</td></tr><tr><td>V</td><td>228,5 μm</td><td colspan="2">228,22</td><td colspan="4">No-load input torque</td><td>Ø</td><td>S1</td><td>145</td><td>Cr 145,015</td></tr><tr><td>L</td><td>71 μm</td><td colspan="2">70,75</td><td colspan="4">Line 1</td><td colspan="2">0,2 Nm</td><td>Ø</td><td>Y1 M8 Pg M8</td></tr><tr><td>Ø Q1</td><td>20^{+0,009}_{-0,004} μm</td><td colspan="2">20,005</td><td colspan="4"></td><td colspan="4">Noise level</td></tr><tr><td>Ø Q2</td><td>20^{+0,009}_{-0,004} μm</td><td colspan="2">20,005</td><td colspan="4"></td><td colspan="4">@1600 rpm input (dB(A)) 65,5</td></tr><tr><td colspan="4"></td><td colspan="2">Torsional stiffness (Nm/arcmin)</td><td>1</td><td colspan="2">81,39</td><td colspan="3"></td></tr><tr><td colspan="4"></td><td colspan="2">Radial stiffness (N/μm)</td><td>1</td><td colspan="2">314</td><td colspan="3"></td></tr></table>						HOUSING				OUTPUT PINION				MOTOR FLANGE				requirement		measure		requirement		measure		requirement		measure				B4965				M2344				B4865		E1	152h7 ⁰ _{-0,04} μm	151,975		Span dimension over 3 teeth				Ø	B	110G7 ^{+0,047} _{+0,012} μm	110,035	E2	140h7 ⁰ _{-0,04} μm	139,985		G1	23,28 ⁰ _{-0,03} Cmm	23,26		Ø	C	24F7 ^{+0,041} _{+0,020} μm	24,04	n x H on PCD J	12 Ø6,5 on PCD 168	Cr	12 Ø6,5 on PCD 168	g1	0,021 Di	0,01			D	5	Cr 5,085	V	228,5 μm	228,22		No-load input torque				Ø	S1	145	Cr 145,015	L	71 μm	70,75		Line 1				0,2 Nm		Ø	Y1 M8 Pg M8	Ø Q1	20 ^{+0,009} _{-0,004} μm	20,005						Noise level				Ø Q2	20 ^{+0,009} _{-0,004} μm	20,005						@1600 rpm input (dB(A)) 65,5								Torsional stiffness (Nm/arcmin)		1	81,39									Radial stiffness (N/μm)		1	314				
HOUSING				OUTPUT PINION				MOTOR FLANGE																																																																																																																																													
requirement		measure		requirement		measure		requirement		measure																																																																																																																																											
		B4965				M2344				B4865																																																																																																																																											
E1	152h7 ⁰ _{-0,04} μm	151,975		Span dimension over 3 teeth				Ø	B	110G7 ^{+0,047} _{+0,012} μm	110,035																																																																																																																																										
E2	140h7 ⁰ _{-0,04} μm	139,985		G1	23,28 ⁰ _{-0,03} Cmm	23,26		Ø	C	24F7 ^{+0,041} _{+0,020} μm	24,04																																																																																																																																										
n x H on PCD J	12 Ø6,5 on PCD 168	Cr	12 Ø6,5 on PCD 168	g1	0,021 Di	0,01			D	5	Cr 5,085																																																																																																																																										
V	228,5 μm	228,22		No-load input torque				Ø	S1	145	Cr 145,015																																																																																																																																										
L	71 μm	70,75		Line 1				0,2 Nm		Ø	Y1 M8 Pg M8																																																																																																																																										
Ø Q1	20 ^{+0,009} _{-0,004} μm	20,005						Noise level																																																																																																																																													
Ø Q2	20 ^{+0,009} _{-0,004} μm	20,005						@1600 rpm input (dB(A)) 65,5																																																																																																																																													
				Torsional stiffness (Nm/arcmin)		1	81,39																																																																																																																																														
				Radial stiffness (N/μm)		1	314																																																																																																																																														
Date: 09/10/2018 Visa: C DE MIRANDA																																																																																																																																																					
Version: A																																																																																																																																																					
Product images are for illustrative purposes only.																																																																																																																																																					
REDEX		ZI-BP79 F45210 FERRIERES www.redex.fr		Tel: +33 2 38 94 42 00 Fax: +33 2 38 94 42 99 Email: info@redex.fr																																																																																																																																																	