


KRPX				Page	
Performance sheet		RX183-007-D		1/2	
CUSTOMER:	ELECTROIMPACT	CUSTOMER ORDER REF:	124091 ELECTROIMPACT		
DISTRIBUTOR:		REDEX ORDER REF:	213166		
DESIGNATION:	KRPX3+M.46.3.H.28/38	SERIAL NUMBER:	902605		
CODE:	RX131507-13	MOTOR FLANGE CODE:	RX128581-06		

EXTERNAL DIMENSIONS & INTERFACES:

SN: 902605

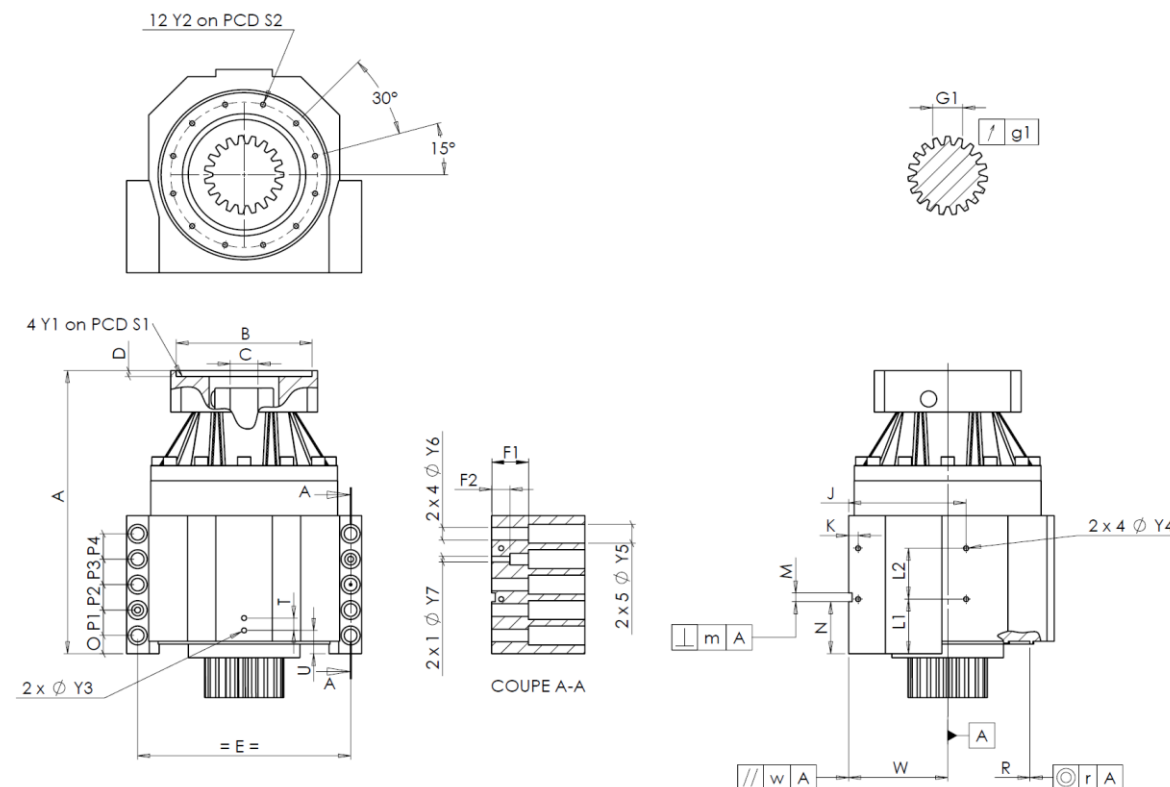

General tolerance: Js13		Cmm	Automatic / manual coordinate-measuring machine		µm	Micrometer	Cr	Calliper rule	Di	Dial indicator	Pg	Plug gauge			
HOUSING					HOUSING					MOTOR FLANGE					
requirement					measure					requirement			measure		
					B9174										
	Y2	M8x15	Pg	M8x15		L1	75	Cr	75						
Ø	S2	200 ^{+0,1} _{-0,1}	Cr	200		L2	70	Cr	70	Ø	B	181	µm	181	
	A	399,5	µm	399,56		J	160	Cr	160	Ø	C	38 ^{+0,05} _{+0,025}	µm	38,05	
	E	290	Cr	290	2 x 4Ø	K	13	Cr	13		D	8	Cr	8,5	
	O	25	Cr	25		Y4	M8x15	Pg	M8x15	Ø	S1	215	Cr	215	
	P1	35	Cr	35		F1	50	Cr	50	Ø	Y1	M12	Pg	M12	
	P2	35	Cr	35	2 x 1Ø	F2	25	Cr	25	No-load input torque					
	P3	35	Cr	35	2 x 4Ø	Y7	12	µm	12	Line 1 0,5 Nm					
	P4	35	Cr	35	2 x 5Ø	Y6	17,5	µm	17,5						
	T	17	Cr	17		Y5	26	µm	26						
	U	32	Cr	32		M H6	12 ^{+0,011} ₀	Cmm	12,001						
2 x 1Ø	Y3	M8x15	Pg	M8x15	⊥	m	0,05	Cmm	0,02						
	R	226 ^{+0,2} _{+0,1}	Cmm	226,132	A	N	71,5 ^{+0,1} _{-0,1}	Cmm	71,521	Torsional stiffness (Nm/arcmin) 1 473,03					
⊙	r	0,1	Cmm	0,022	//	W	135 ^{+0,035} _{-0,035}	Cmm	135,011	Radial stiffness (N/µm) 1 1166					
						w	0,03	/A Cmm	0,01						

OUTPUT PINION					Noise level	
M2534					@1600 rpm input (dB(A))	61,0
Span dimension over 3 teeth						
	G1	39,25 ⁰ _{-0,03}	Cmm	39,23		
	g1	0,022	Di	0,01		

Date: 03/12/2018 Visa: C DE MIRANDA p.o. JP MOZZICONACO

Version: A

Product images are for illustrative purposes only.



ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr



ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr