


KRP		Page
Scheda di prestazione	RX183-006-A	1/2
CLIENTE:	MECOF	RIF. ORDINE CLIENTE: 852 MECOF
DISTRIBUTORE:	ANDANTEX S.r.l	ORDINE INTERNO: 213837
DESIGNAZIONE:	KRP3+M.31.3.H.28/38	NUMERO DI SERIE: 903033
RIFERIMENTO:	RX129016-12	RIFERIMENTO DELLA FLANGIA MOTORE: RX128581-13

Per l'installazione, fare riferimento al manuale d'uso KRP (182/008)

OSSERVAZIONE SPECIFICA:

Le immagini dei prodotti sono a carattere puramente illustrativo.

KRP		Page
Scheda di prestazione	RX183-006-A	2/2
INTERFACCE E DIMENSIONI ESTERNE:		SN: 903033

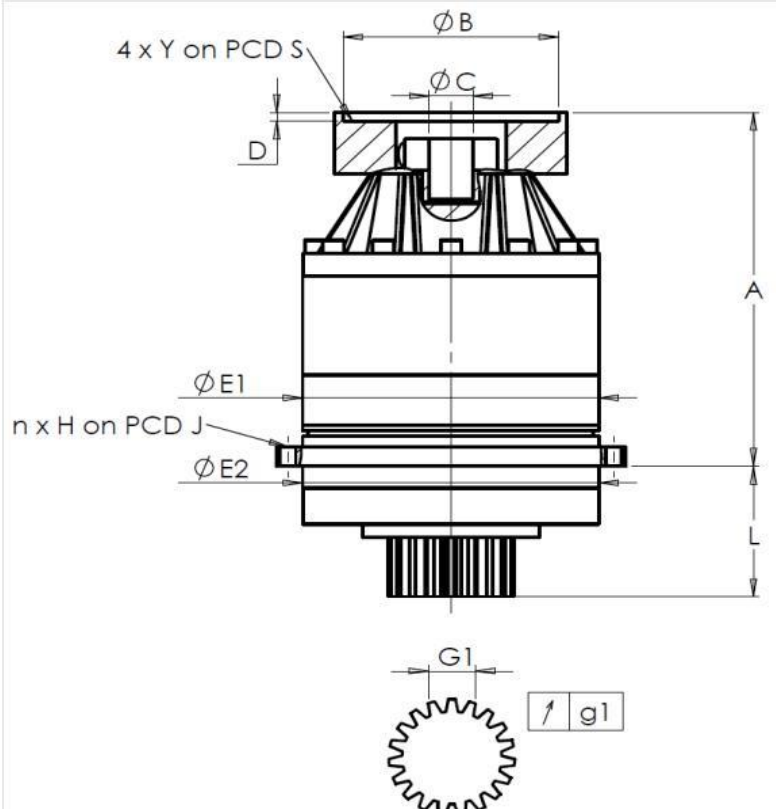

Technical drawing of the KRP pump assembly, showing a cross-section and a top view of the gear. The drawing includes the following dimensions and labels:

- ϕB : Outer diameter of the top housing.
- ϕC : Inner diameter of the top housing.
- $4 \times Y$ on PCD S : Four mounting holes on the top housing.
- D : Thickness of the top housing.
- A : Total height of the pump assembly.
- $\phi E1$: Diameter of the middle section.
- $n \times H$ on PCD J : n mounting holes on the middle section.
- $\phi E2$: Diameter of the bottom section.
- L : Height of the bottom section.
- $G1$: Pitch diameter of the gear.
- $g1$: Addendum of the gear.

General tolerance: Js13				Cmm		Automatic / manual coordinate-measuring machine				µm		Micrometer		Cr		Calliper rule		Di		Dial indicator		Pg		Plug gauge			
CASSA ESTERNA						PIGNONE IN USCITA						FLANGIA DEL MOTORE															
		richiesta		misurata				richiesta		misurata				richiesta		misurata											
				B7475						M2536																	
		E1		255h7 ⁰ _{-0,052}		µm		254,98		Scostamento (su 3 denti)				Ø		B		180G6 ^{+0,039} _{+0,014}		µm		180,03					
		E2		255h7 ⁰ _{-0,052}		µm		255						Ø		C		38F7 ^{+0,05} _{+0,025}		µm		38,05					
n x H on PCD J		16 Ø13,5 on PCD 280		Cr		16 Ø13,5 on		↗		G1		39,25 ⁰ _{-0,03}		Cmm		39,23		Ø		D		8		Cr		8,5	
				Cr		PCD 280								Di		0,01								Cr		215	
		A		328,5		µm		329,22		Coppia in ingresso a vuoto				Ø		Y1		M12		Pg		M12					
		L		121		µm		121,07		linea 1				1 Nm													
										Livello di rumore																	
												Linea		Rigidità		@1600 rpm entrata (dB(A))		64,0									
										Rigidità torsionale (Nm/arcmin)		1		473,03													
										Rigidità radiale (N/µm)		1		1015													