


KRP		Page	
Scheda di prestazione		RX183-006-A	
CLIENTE:		RIF. ORDINE CLIENTE:	
DISTRIBUTORE:		ORDINE INTERNO:	
DESIGNAZIONE:		NUMERO DI SERIE:	
RIFERIMENTO:		RIFERIMENTO DELLA FLANGIA MOTORE:	

BELOTTI		940 BELOTTI			
ANDANTEX S.r.l		213909			
KRP1+M.10.3.H.28/38		903153			
RX129833-03		RX128581-01			
Per l'installazione, fare riferimento al manuale d'uso KRP (182/008)					
OSSERVAZIONE SPECIFICA:					
Le immagini dei prodotti sono a carattere puramente illustrativo.					

KRP		Page
Scheda di prestazione		RX183-006-A
2/2		

INTERFACCE E DIMENSIONI ESTERNE:		SN:	903153
----------------------------------	--	-----	--------

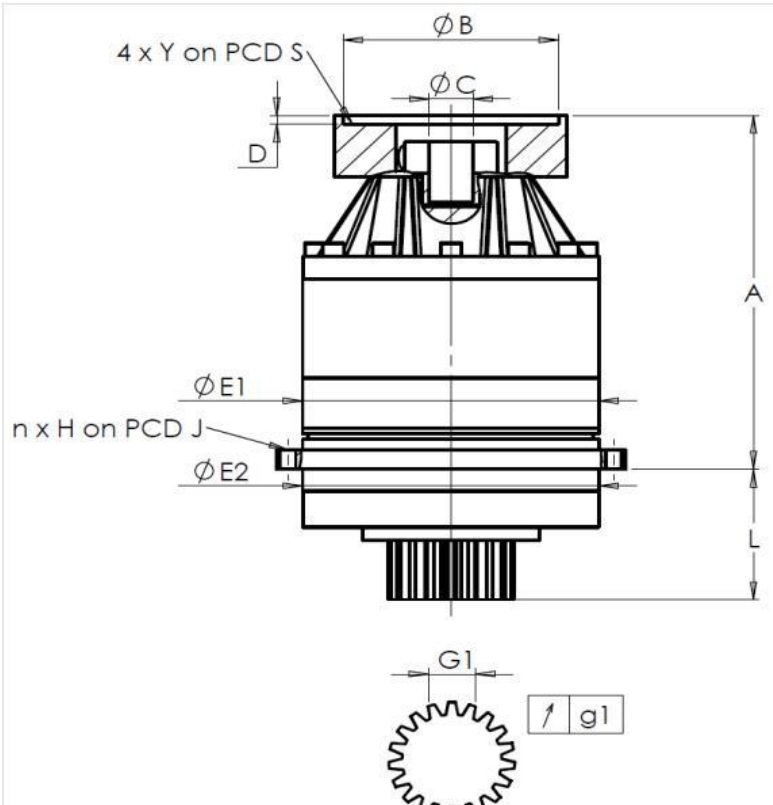

Technical drawing of a mechanical component (KRP) showing a cross-section and a top view. The cross-section shows a central shaft with a gear at the bottom. Dimensions include: 4 x Y on PCD S (four small holes on a circular pattern), Ø B (outer diameter of the top flange), Ø C (inner diameter of the top flange), D (thickness of the top flange), A (total height of the main body), L (height of the gear housing), Ø E1 (diameter of the main body), n x H on PCD J (n holes of diameter H on a circular pattern), Ø E2 (diameter of the gear housing), and G1 (pitch diameter of the gear). The top view shows a gear with a pitch diameter G1 and a tolerance g1.

General tolerance: Js13				Cmm	Automatic / manual coordinate-measuring machine				µm	Micrometer		Cr	Calliper rule		Di	Dial indicator		Pg	Plug gauge	
CASSA ESTERNA					PIGNONE IN USCITA					FLANGIA DEL MOTORE										
richiesta					misurata		richiesta					misurata		richiesta			misurata			
					B9574							M4205								
		E1	152h7 ⁰ _{-0,04}	µm	151,985	Scostamento (su 3 denti)						Ø	B	181	µm	181,04				
		E2	140h7 ⁰ _{-0,04}	µm	139,985		G1	23,28 ⁰ _{-0,03}	Cmm	23,265		Ø	C	38 ^{+0,05} _{+0,025}	µm	38,04				
n x H on PCD J		12 Ø6,5 on PCD 168	Cr	OK	↗	g1	0,021	Di	0,01			D	8	Cr	8,49					
			Cr									Ø	S1	215	Cr	215				
	A	217	µm	217,81	Coppia in ingresso a vuoto						Ø	Y1	M12	Pg	M12					
	L	71	µm	70,82	linea 1					0,3 Nm										
												Livello di rumore								
							Linea	Rigidità			@1600 rpm entrata (dB(A))	64,0								
							Rigidità torsionale (Nm/arcmin)	1	81,39											
							Rigidità radiale (N/µm)	1	340											

Date: 12/04/2019

Version: A

Visa: C DE MIRANDA