

KRP

PERFORMANCE SHEET

RX183-006-A

1/2

CUSTOMER:PMI

CUSTOMER ORDER REF:RX109303T PMI

DISTRIBUTOR:GUDEL LINEARTEC Co. Ltd

REDEX ORDER REF:215203


DESIGNATION:KRP1+M.7.3.H.28/38

SERIAL NUMBER:904550

CODE:RX129833-02

MOTOR FLANGE CODE:RX128581-02

EXTERNAL DIMENSIONS & INTERFACES:

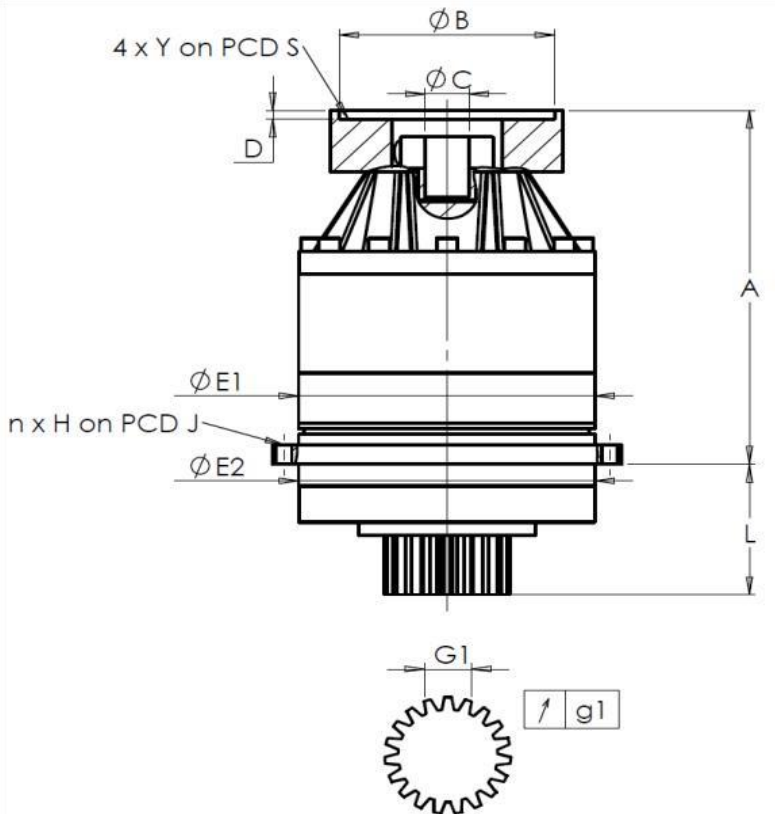

General tolerance: Js13

Cmm

Automatic / manual coordinate-measuring machine

µm

Micrometer

Cr

Calliper rule

Di

Dial indicator

Pg

Plug gauge

HOUSING					OUTPUT PINION				MOTOR FLANGE						
requirement			measure		requirement		measure		requirement		measure				
			C4638				L2718								
	E1	152h7 ⁰ _{-0,04}	µm	152	Span dimension over 3 teeth				Ø	B	115	µm	114,95		
	E2	140h7 ⁰ _{-0,04}	µm	140		G1	23,28 ⁰ _{-0,03}	Cmm	23,27	Ø	C	35 ^{+0,05} _{+0,025}	µm	35,03	
	n x H on PCD J	12 Ø6,5 on PCD 168	Cr	12 Ø6,5 on PCD 168	↗	g1	0,021	Di	0,02		D	8	Cr	8,49	
	A	217	µm	217,98	No-load input torque				Ø	S1	200	Cr	200		
	L	71	µm	70,74	Line 1				0,7 Nm	Ø	Y1	M12	Pg	M12	
									Noise level						
											Line	Stiffness	@1600 rpm input (dB(A))		65,0
									Torsional stiffness (Nm/arcmin)		1	81,39			
									Radial stiffness (N/µm)		1	422*			

SPECIFIC REMARKS:

* Accepted according to Redex derogation 11447

Date:28/07/2020

Visa: P VASLIER

Version: A

For the installation, please refer to User Manual KRP (182/008)

Product images are for illustrative purposes only.

KRP

PERFORMANCE SHEET

RX183-006-A

2/2

CUSTOMER:PMI

CUSTOMER ORDER REF:RX109303T PMI

DISTRIBUTOR:GUDEL LINEARTEC Co. Ltd

REDEX ORDER REF:215203


DESIGNATION:KRP1+M.7.3.H.28/38

SERIAL NUMBER:904550

CODE:RX129833-02

MOTOR FLANGE CODE:RX128581-02

EXTERNAL DIMENSIONS & INTERFACES:

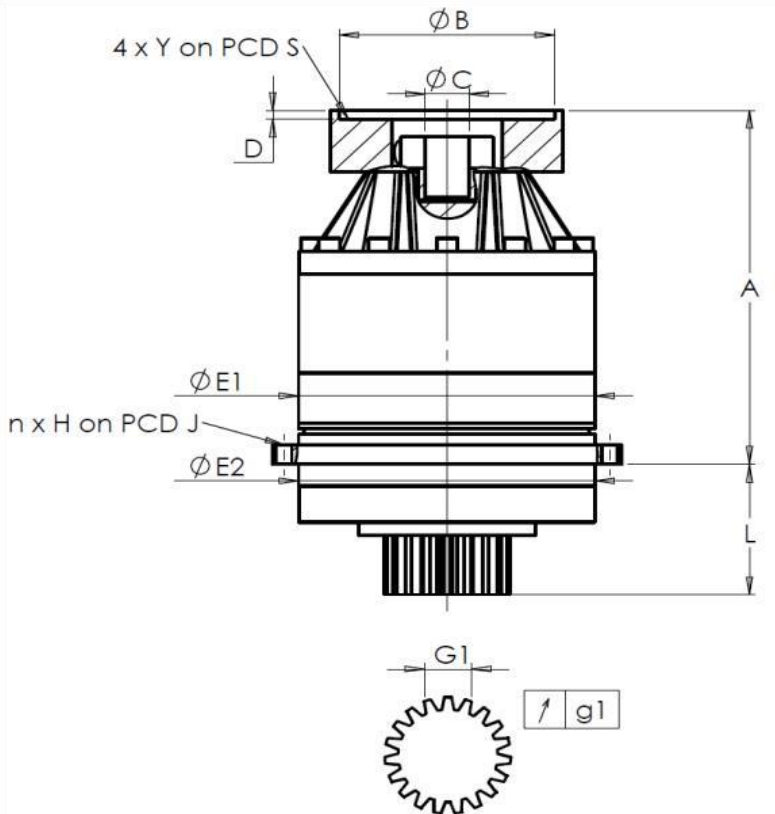

General tolerance: Js13

Cmm

Automatic / manual coordinate-measuring machine

µm

Micrometer

Cr

Calliper rule

Di

Dial indicator

Pg

Plug gauge

HOUSING					OUTPUT PINION				MOTOR FLANGE						
requirement			measure		requirement		measure		requirement		measure				
			C4638				L2718								
	E1	152h7 ⁰ _{-0,04}	µm	152	Span dimension over 3 teeth				Ø	B	115	µm	114,95		
	E2	140h7 ⁰ _{-0,04}	µm	140		G1	23,28 ⁰ _{-0,03}	Cmm	23,27	Ø	C	35 ^{+0,05} _{+0,025}	µm	35,03	
	n x H on PCD J	12 Ø6,5 on PCD 168	Cr	12 Ø6,5 on PCD 168	↗	g1	0,021	Di	0,02		D	8	Cr	8,49	
	A	217	µm	217,98	No-load input torque				Ø	S1	200	Cr	200		
	L	71	µm	70,74	Line 1				0,7 Nm	Ø	Y1	M12	Pg	M12	
									Noise level						
											Line	Stiffness	@1600 rpm input (dB(A))		65,0
									Torsional stiffness (Nm/arcmin)		1	81,39			
									Radial stiffness (N/µm)		1	422*			

SPECIFIC REMARKS:

* Accepted according to Redex derogation 11447

Date:28/07/2020

Visa: P VASLIER

Version: A

For the installation, please refer to User Manual KRP (182/008)

Product images are for illustrative purposes only.

REDEX

ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr

REDEX

ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr