

CUSTOMER:	000 PROIZVODSTVENNO KOMP	CUSTOMER ORDER REF:	20200421 - IMPEKS OF 21.04.20
DISTRIBUTOR:		REDEX ORDER REF:	215136
DESIGNATION:	KRP5+RX.155.4.H	SERIAL NUMBER:	904596
CODE:	RX134069-00	MOTOR FLANGE CODE:	RX129582-01

For the installation, please refer to User Manual KRP (182/008)

SPECIFIC REMARKS:


Product images are for illustrative purposes only.

REDEX

ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr

EXTERNAL DIMENSIONS & INTERFACES: SN: 904596

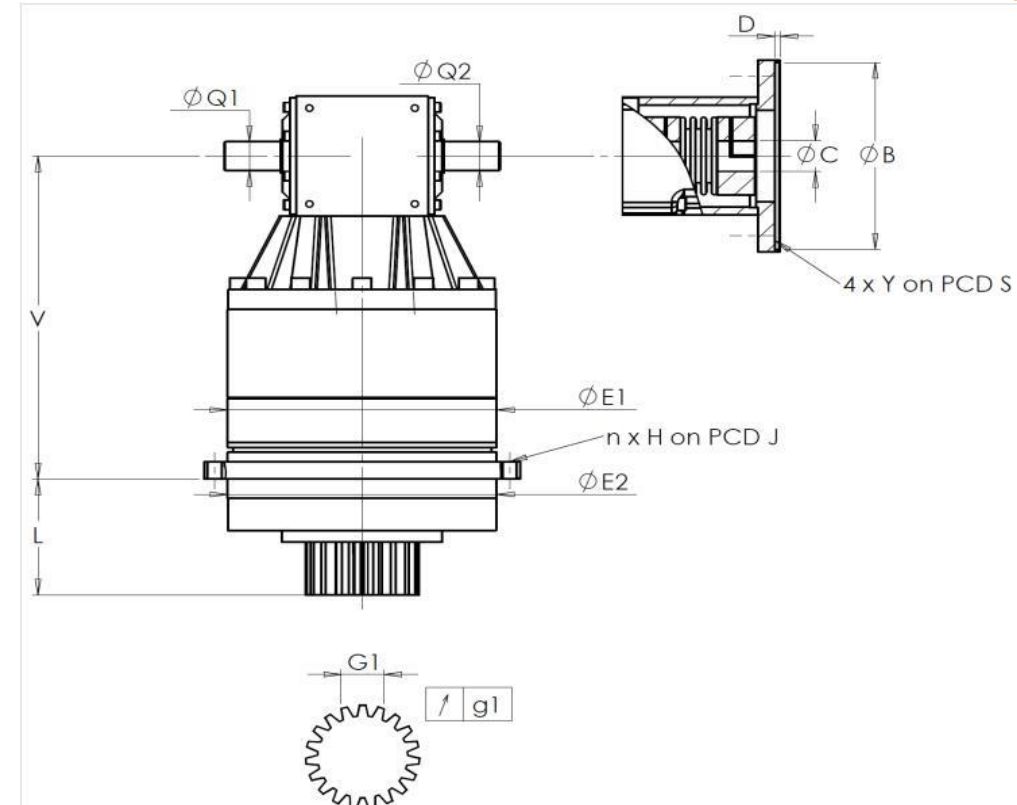

General tolerance: Js13	<i>Cmm</i>	Automatic / manual coordinate-measuring machine	μm	Micrometer	<i>Cr</i>	Calliper rule	<i>Di</i>	Dial indicator	<i>Pg</i>	Plug gauge
-------------------------	------------	--	---------------	------------	-----------	---------------	-----------	----------------	-----------	------------

HOUSING					OUTPUT PINION					MOTOR FLANGE							
requirement					measure		requirement				measure		requirement			measure	
					D404						K1163					A326	
	E1	355j6	^{+0,018} _{-0,018}	μm	355,018	Span dimension over 3 teeth					Ø	B	250	^{+0,061} _{+0,015}	μm	250,045	
	E2	355j6	^{+0,018} _{-0,018}	μm	355,01		G1	62,97 ⁰ _{-0,05}	Cmm	62,945	Ø	C	48	^{+0,05} _{+0,025}	μm	48,025	
	n x H on PCD J	12 Ø17,5 on PCD 385	Cr	12 Ø17,5 on	↗	g1	0,03	Di	0,02		D	8	Cr	8,16			
			Cr	PCD 385						Ø	S1	300	Cr	299,93			
	V	524		μm	524,48	No-load input torque					Ø	Y1	M16	Pg	M16		
	L	178		μm	178,07	Line 1				0,6 Nm							
	Ø	Q1	30j6	^{+0,009} _{-0,004}	μm	30,009						Noise level					
	Ø	Q2	30j6	^{+0,009} _{-0,004}	μm	30,009				Line	Stiffness	@1600 rpm input (dB(A))		64,0			
						Torsional stiffness (Nm/arcmin)		1	1076,47								
						Radial stiffness (N/μm)		1	1261								

Date: 06/10/2020

Visa: P VASLIER

Version: A

REDEX

ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr