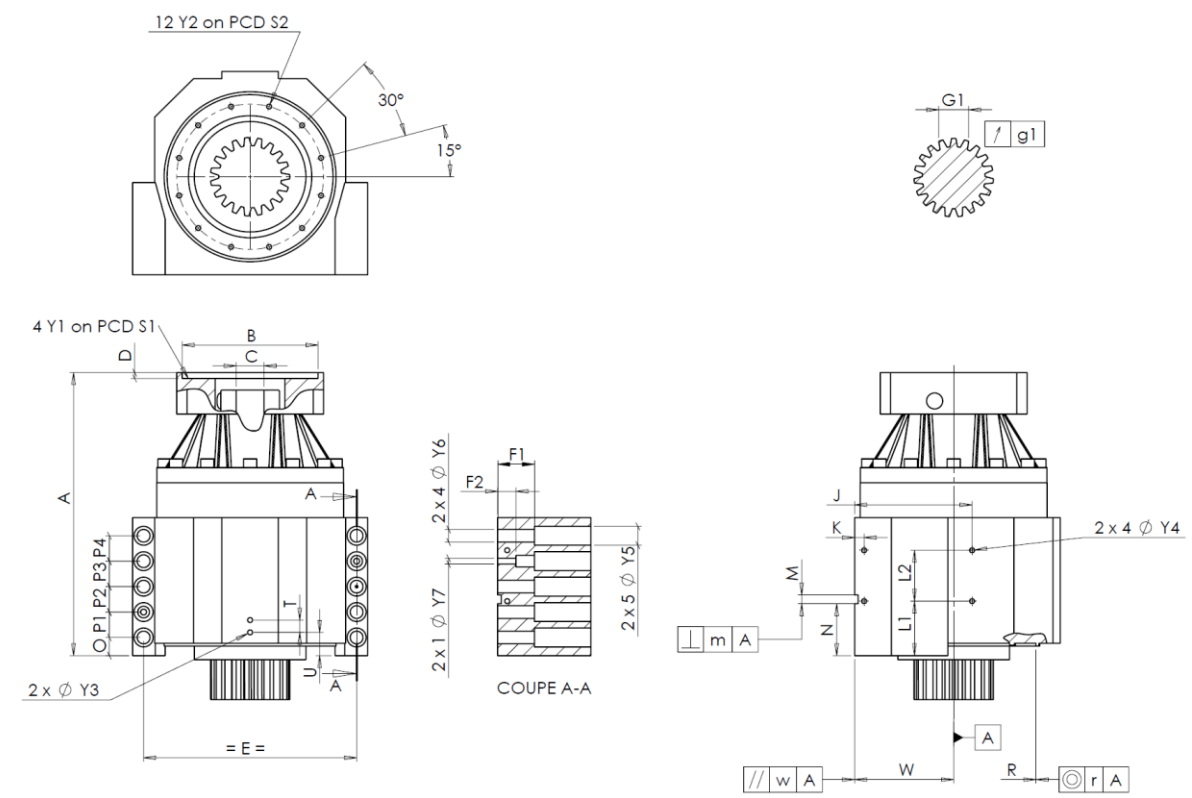


KRPX - SAV - 25/06/2021				Page																																																																																																																																																																																																																																																											
Performance sheet		RX183-007-D		1/2																																																																																																																																																																																																																																																											
CUSTOMER:	KARATS PRECISION	CUSTOMER ORDER REF:	SF210531IB-1 KARATS PRECISION																																																																																																																																																																																																																																																												
DISTRIBUTOR:	S & F INC	REDEX ORDER REF:	216083																																																																																																																																																																																																																																																												
DESIGNATION:	KRPX5+M.91.3.H.35/48	SERIAL NUMBER:	904639																																																																																																																																																																																																																																																												
CODE:	RX132056-33 RE206465-00	MOTOR FLANGE CODE:	RX128583-16																																																																																																																																																																																																																																																												
For the installation, please refer to User Manual KRPX (182/010) SPECIFIC REMARKS:																																																																																																																																																																																																																																																															
						EXTERNAL DIMENSIONS & INTERFACES: SN: 904639 																																																																																																																																																																																																																																																									
						General tolerance: Js13 <table><tr><td>Cmm</td><td>Automatic / manual coordinate-measuring machine</td><td>µm</td><td>Micrometer</td><td>Cr</td><td>Calliper rule</td><td>Di</td><td>Dial indicator</td><td>Pg</td><td>Plug gauge</td></tr></table>						Cmm	Automatic / manual coordinate-measuring machine	µm	Micrometer	Cr	Calliper rule	Di	Dial indicator	Pg	Plug gauge																																																																																																																																																																																																																																										
						Cmm	Automatic / manual coordinate-measuring machine	µm	Micrometer	Cr	Calliper rule	Di	Dial indicator	Pg	Plug gauge																																																																																																																																																																																																																																																
						<table><tr><th colspan="4">HOUSING</th><th colspan="4">HOUSING</th><th colspan="4">MOTOR FLANGE</th></tr><tr><th colspan="4">requirement</th><th colspan="4">measure</th><th colspan="4">requirement</th><th colspan="4">measure</th></tr><tr><td colspan="4"></td><td colspan="4">B9427</td><td colspan="4"></td><td colspan="4"></td></tr><tr><td></td><td>Y2</td><td>M10x20</td><td>Pg</td><td>M10x20</td><td></td><td>L1</td><td>100</td><td>Cr</td><td>100</td><td></td><td>Ø</td><td>B</td><td>116</td><td>µm</td><td>116</td></tr><tr><td>Ø</td><td>S2</td><td>265^{+0,1}_{-0,1}</td><td>Cr</td><td>265</td><td></td><td>L2</td><td>90</td><td>Cr</td><td>90</td><td></td><td>Ø</td><td>C</td><td>T38</td><td>µm</td><td>T38</td></tr><tr><td></td><td>A</td><td>511</td><td>µm</td><td>512</td><td></td><td>J</td><td>210</td><td>Cr</td><td>210</td><td></td><td></td><td>D</td><td>8</td><td>Cr</td><td>8,59</td></tr><tr><td></td><td>E</td><td>420</td><td>Cr</td><td>420</td><td>2 x 4Ø</td><td>K</td><td>20</td><td>Cr</td><td>20</td><td></td><td>Ø</td><td>S1</td><td>200</td><td>Cr</td><td>200</td></tr><tr><td></td><td>O</td><td>33</td><td>Cr</td><td>33</td><td></td><td>F1</td><td>70</td><td>Cr</td><td>70,14</td><td></td><td>Ø</td><td>Y1</td><td>M12</td><td>Pg</td><td>M12</td></tr><tr><td></td><td>P1</td><td>45</td><td>Cr</td><td>45</td><td></td><td>F2</td><td>35</td><td>Cr</td><td>35</td><td colspan="6" rowspan="2">No-load input torque</td></tr><tr><td></td><td>P2</td><td>45</td><td>Cr</td><td>45</td><td>2 x 1Ø</td><td>Y7</td><td>14</td><td>µm</td><td>14</td><td colspan="2">Line 1</td><td colspan="2">0,6 Nm</td></tr><tr><td></td><td>P3</td><td>45</td><td>Cr</td><td>45</td><td>2 x 4Ø</td><td>Y6</td><td>26</td><td>µm</td><td>26</td><td colspan="6" rowspan="2">Line Stiffness</td></tr><tr><td></td><td>P4</td><td>45</td><td>Cr</td><td>45</td><td>2 x 5Ø</td><td>Y5</td><td>39</td><td>µm</td><td>39</td><td colspan="2">Torsional stiffness (Nm/arcmin)</td><td>1</td><td>1076,47</td></tr><tr><td></td><td>T</td><td>25</td><td>Cr</td><td>25</td><td></td><td>M H6</td><td>16^{+0,011}₀</td><td>Cmm</td><td>16,002</td><td colspan="2" rowspan="2">Radial stiffness (N/µm)</td><td>1</td><td>1186</td></tr><tr><td></td><td>U</td><td>40</td><td>Cr</td><td>40</td><td>⊥</td><td>m</td><td>0,05</td><td>Cmm</td><td>0,012</td></tr><tr><td>2 x 1Ø</td><td>Y3</td><td>M12x20</td><td>Pg</td><td>M12x20</td><td></td><td>N</td><td>92,5^{+0,1}_{-0,1}</td><td>Cmm</td><td>92,486</td><td colspan="6" rowspan="2"></td></tr><tr><td></td><td>R</td><td>290^{+0,2}_{+0,1}</td><td>Cmm</td><td>290,13</td><td>A</td><td>W</td><td>180^{+0,05}_{-0,05}</td><td>Cmm</td><td>180,012</td></tr><tr><td>⊙</td><td>r</td><td>0,1</td><td>Cmm</td><td>0,01</td><td>//</td><td>w</td><td>0,05</td><td>/A Cmm</td><td>0,01</td></tr></table>						HOUSING				HOUSING				MOTOR FLANGE				requirement				measure				requirement				measure								B9427													Y2	M10x20	Pg	M10x20		L1	100	Cr	100		Ø	B	116	µm	116	Ø	S2	265 ^{+0,1} _{-0,1}	Cr	265		L2	90	Cr	90		Ø	C	T38	µm	T38		A	511	µm	512		J	210	Cr	210			D	8	Cr	8,59		E	420	Cr	420	2 x 4Ø	K	20	Cr	20		Ø	S1	200	Cr	200		O	33	Cr	33		F1	70	Cr	70,14		Ø	Y1	M12	Pg	M12		P1	45	Cr	45		F2	35	Cr	35	No-load input torque							P2	45	Cr	45	2 x 1Ø	Y7	14	µm	14	Line 1		0,6 Nm			P3	45	Cr	45	2 x 4Ø	Y6	26	µm	26	Line Stiffness							P4	45	Cr	45	2 x 5Ø	Y5	39	µm	39	Torsional stiffness (Nm/arcmin)		1	1076,47		T	25	Cr	25		M H6	16 ^{+0,011} ₀	Cmm	16,002	Radial stiffness (N/µm)		1	1186		U	40	Cr	40	⊥	m	0,05	Cmm	0,012	2 x 1Ø	Y3	M12x20	Pg	M12x20		N	92,5 ^{+0,1} _{-0,1}	Cmm	92,486								R	290 ^{+0,2} _{+0,1}	Cmm	290,13	A	W	180 ^{+0,05} _{-0,05}	Cmm	180,012	⊙	r	0,1	Cmm	0,01	//	w	0,05	/A Cmm	0,01
						HOUSING				HOUSING				MOTOR FLANGE																																																																																																																																																																																																																																																	
						requirement				measure				requirement				measure																																																																																																																																																																																																																																													
										B9427																																																																																																																																																																																																																																																					
							Y2	M10x20	Pg	M10x20		L1	100	Cr	100		Ø	B	116	µm	116																																																																																																																																																																																																																																										
						Ø	S2	265 ^{+0,1} _{-0,1}	Cr	265		L2	90	Cr	90		Ø	C	T38	µm	T38																																																																																																																																																																																																																																										
	A	511	µm	512		J	210	Cr	210			D	8	Cr	8,59																																																																																																																																																																																																																																																
	E	420	Cr	420	2 x 4Ø	K	20	Cr	20		Ø	S1	200	Cr	200																																																																																																																																																																																																																																																
	O	33	Cr	33		F1	70	Cr	70,14		Ø	Y1	M12	Pg	M12																																																																																																																																																																																																																																																
	P1	45	Cr	45		F2	35	Cr	35	No-load input torque																																																																																																																																																																																																																																																					
	P2	45	Cr	45	2 x 1Ø	Y7	14	µm	14							Line 1		0,6 Nm																																																																																																																																																																																																																																													
	P3	45	Cr	45	2 x 4Ø	Y6	26	µm	26	Line Stiffness																																																																																																																																																																																																																																																					
	P4	45	Cr	45	2 x 5Ø	Y5	39	µm	39							Torsional stiffness (Nm/arcmin)		1	1076,47																																																																																																																																																																																																																																												
	T	25	Cr	25		M H6	16 ^{+0,011} ₀	Cmm	16,002	Radial stiffness (N/µm)		1	1186																																																																																																																																																																																																																																																		
	U	40	Cr	40	⊥	m	0,05	Cmm	0,012																																																																																																																																																																																																																																																						
2 x 1Ø	Y3	M12x20	Pg	M12x20		N	92,5 ^{+0,1} _{-0,1}	Cmm	92,486																																																																																																																																																																																																																																																						
	R	290 ^{+0,2} _{+0,1}	Cmm	290,13	A	W	180 ^{+0,05} _{-0,05}	Cmm	180,012																																																																																																																																																																																																																																																						
⊙	r	0,1	Cmm	0,01	//	w	0,05	/A Cmm	0,01																																																																																																																																																																																																																																																						
<table><tr><th colspan="4">OUTPUT PINION</th><th colspan="2">Noise level</th></tr><tr><td colspan="4"></td><td>K1165</td><td>@1000 rpm input (dB(A))</td><td>59,5</td></tr><tr><td colspan="6">Span dimension over 3 teeth</td></tr><tr><td></td><td>G1</td><td>62,97⁰_{-0,05}</td><td>Cmm</td><td>62,94</td><td></td><td></td></tr><tr><td>↗</td><td>g1</td><td>0,03</td><td>Di</td><td>0,02</td><td></td><td></td></tr></table>						OUTPUT PINION				Noise level						K1165	@1000 rpm input (dB(A))	59,5	Span dimension over 3 teeth							G1	62,97 ⁰ _{-0,05}	Cmm	62,94			↗	g1	0,03	Di	0,02																																																																																																																																																																																																																											
OUTPUT PINION				Noise level																																																																																																																																																																																																																																																											
				K1165	@1000 rpm input (dB(A))	59,5																																																																																																																																																																																																																																																									
Span dimension over 3 teeth																																																																																																																																																																																																																																																															
	G1	62,97 ⁰ _{-0,05}	Cmm	62,94																																																																																																																																																																																																																																																											
↗	g1	0,03	Di	0,02																																																																																																																																																																																																																																																											
Date: 21/06/2021																																																																																																																																																																																																																																																															
Visa: C DE MIRANDA																																																																																																																																																																																																																																																															
Version: A																																																																																																																																																																																																																																																															
Product images are for illustrative purposes only.																																																																																																																																																																																																																																																															

REDEX		1, Rue Paul De Fontenay F- 45210 FERRIERES www.redex-group.com	Tel: +33 2 38 94 42 00 Fax: +33 2 38 94 42 99 Email: info@redex-group.com
REDEX		1, Rue Paul De Fontenay F- 45210 FERRIERES www.redex-group.com	Tel: +33 2 38 94 42 00 Fax: +33 2 38 94 42 99 Email: info@redex-group.com