


KRPX				Page	
Performance sheet		RX183-007-D	1/2		
CUSTOMER:	DOOSAN	CUSTOMER ORDER REF:	X7297-006 DOOSAN		
DISTRIBUTOR:		REDEX ORDER REF:	215414		
DESIGNATION:	KRPX3+M.21.3.H.28/38	SERIAL NUMBER:	904781		
CODE:	RX131507-11	MOTOR FLANGE CODE:	RX128581-01		

EXTERNAL DIMENSIONS & INTERFACES:

SN: 904781

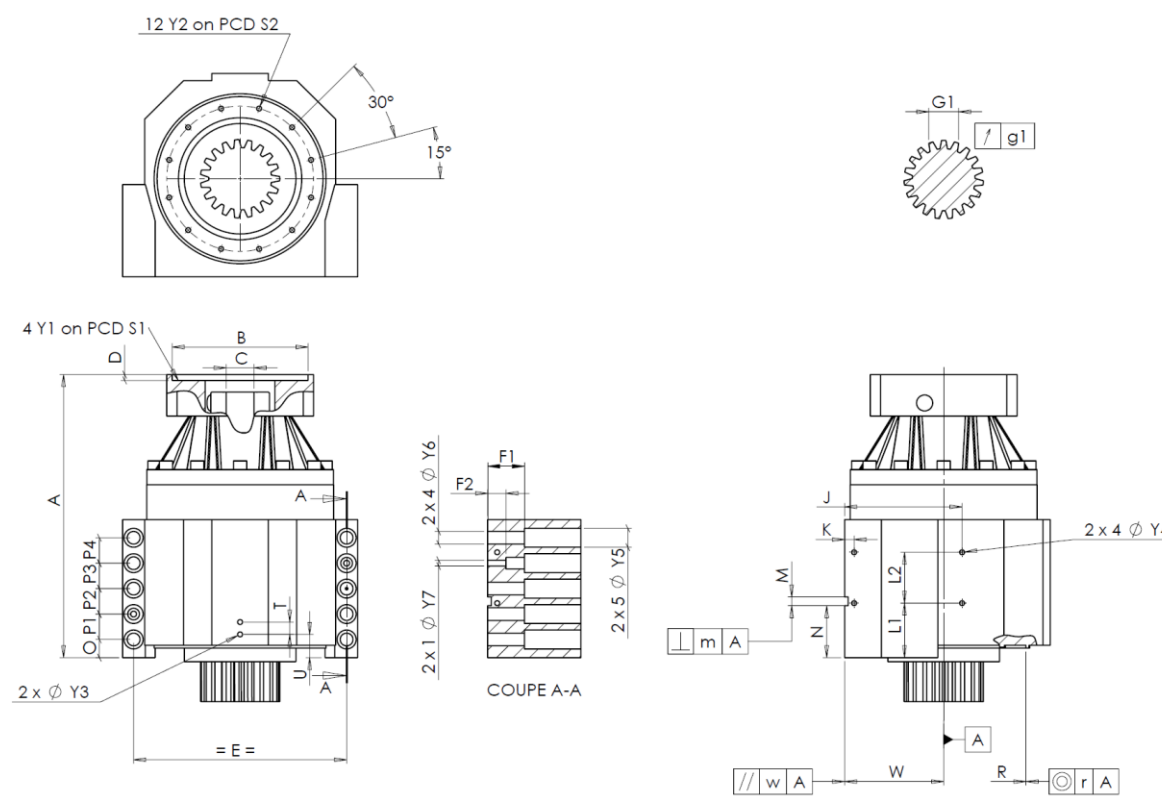

General tolerance: Js13		Cmm	Automatic / manual coordinate-measuring machine		µm	Micrometer	Cr	Calliper rule	Di	Dial indicator	Pg	Plug gauge			
HOUSING				HOUSING				MOTOR FLANGE							
requirement				measure				requirement				measure			
				D1183											
	Y2	M8x15	Pg	M8x15		L1	75	Cr	75						
Ø	S2	200 ^{+0,1} _{-0,1}	Cr	200		L2	70	Cr	70	Ø	B	181	µm 180,97		
	A	389,5	µm	389,75		J	160	Cr	160	Ø	C	38 ^{+0,05} _{+0,025}	µm 38,05		
	E	290	Cr	290	2 x 4Ø	K	13	Cr	13		D	8	Cr 8,5		
	O	25	Cr	25		Y4	M8x15	Pg	M8x15	Ø	S1	215	Cr 215		
	P1	35	Cr	35		F1	50	Cr	50	Ø	Y1	M12	Pg M12		
	P2	35	Cr	35	2 x 1Ø	F2	25	Cr	25	No-load input torque					
	P3	35	Cr	35	2 x 4Ø	Y7	12	µm	12	Line 1 1,5 Nm					
	P4	35	Cr	35	2 x 5Ø	Y6	17,5	µm	17,5						
	T	17	Cr	17		Y5	26	µm	26						
	U	32	Cr	32		M H6	12 ^{+0,011} ₀	Cmm	12,006						
2 x 1Ø	Y3	M8x15	Pg	M8x15		m	0,05	Cmm	0,018						
	R	226 ^{+0,2} _{+0,1}	Cmm	226,126	A	N	71,5 ^{+0,1} _{-0,1}	Cmm	71,512	Torsional stiffness (Nm/arcmin) 1 473,03					
⊙	r	0,1	Cmm	0,018	//	W	135 ^{+0,035} _{-0,035}	Cmm	135,022	Radial stiffness (N/µm) 1 881					
						w	0,03	/A Cmm	0,001						

OUTPUT PINION				Noise level	
K2471				@1600 rpm input (dB(A)) 62,5	
Span dimension over 3 teeth					
	G1	39,25 ⁰ _{-0,03}	Cmm	39,235	
↗	g1	0,022	Di	0,01	

Date: 23/12/2020 Visa: P VASLIER

Version: A



Product images are for illustrative purposes only.

REDEX

ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr

REDEX

ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr