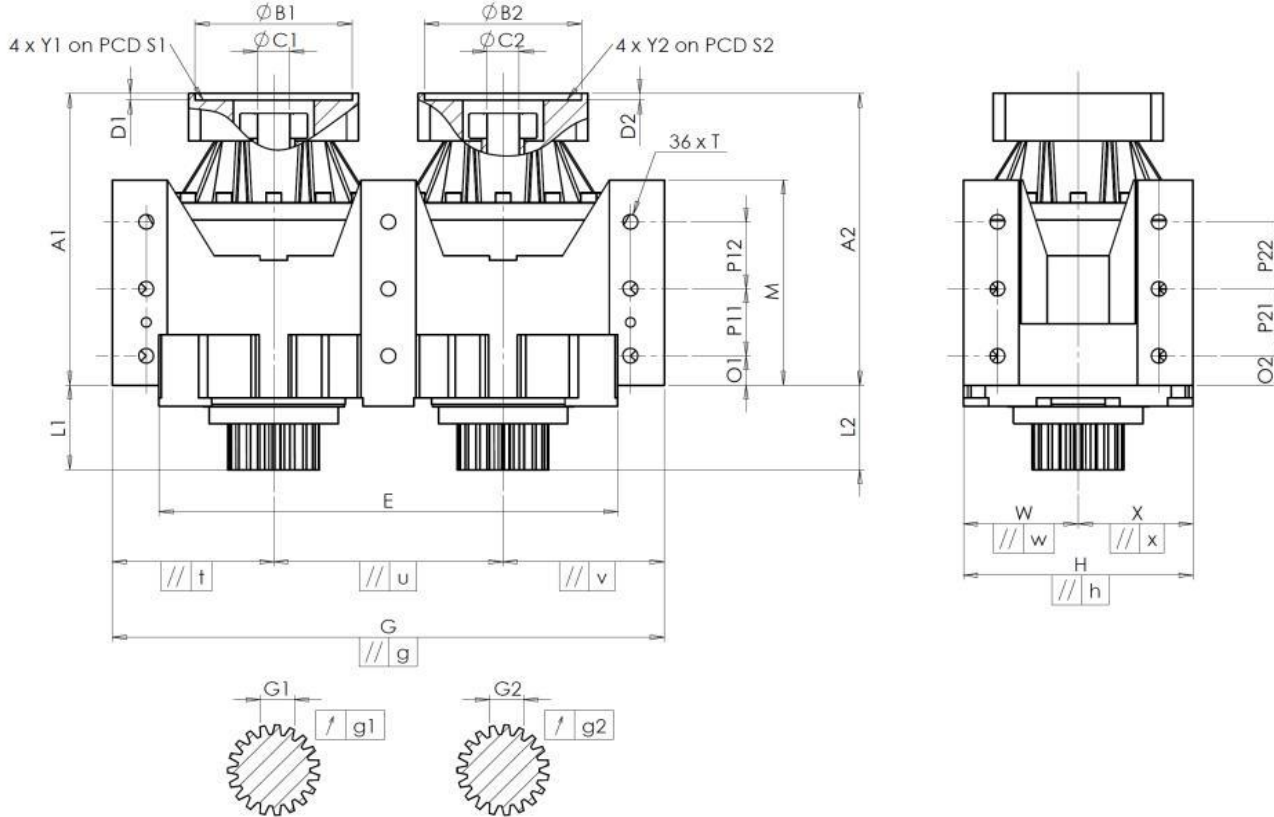


DRP				Page																																																																																																																																																																																																																																																																																																									
Performance sheet				RX183/005-B																																																																																																																																																																																																																																																																																																									
CUSTOMER: KRC				CUSTOMER ORDER REF: *30768-00 KRC																																																																																																																																																																																																																																																																																																									
DISTRIBUTOR: ANDANTEX INCORPORATED				REDEX ORDER REF: 215377																																																																																																																																																																																																																																																																																																									
DESIGNATION: DRP4+M.31.3.H.35/48				SERIAL NUMBER: 904967																																																																																																																																																																																																																																																																																																									
CODE: RX129702-12				MOTOR FLANGE CODE: RX128583-10																																																																																																																																																																																																																																																																																																									
For the installation, please refer to User Manual DRP (182/009)				EXTERNAL DIMENSIONS & INTERFACES: 																																																																																																																																																																																																																																																																																																									
SPECIFIC REMARKS:				General tolerance: Js13																																																																																																																																																																																																																																																																																																									
				Automatic / manual coordinate-measuring machine																																																																																																																																																																																																																																																																																																									
				µm																																																																																																																																																																																																																																																																																																									
				Micrometer																																																																																																																																																																																																																																																																																																									
				Cr																																																																																																																																																																																																																																																																																																									
				Calliper rule																																																																																																																																																																																																																																																																																																									
				Di																																																																																																																																																																																																																																																																																																									
				Dial indicator																																																																																																																																																																																																																																																																																																									
				Pg																																																																																																																																																																																																																																																																																																									
				Plug gauge																																																																																																																																																																																																																																																																																																									
				<table><tr><th colspan="4">HOUSING</th><th colspan="4">HOUSING</th><th colspan="4">MOTOR FLANGE</th></tr><tr><th colspan="2">requirement</th><th colspan="2">measure</th><th colspan="2">requirement</th><th colspan="2">measure</th><th colspan="2">requirement</th><th colspan="2">measure</th></tr><tr><td></td><td></td><td></td><td>C1644</td><td></td><td>O1 43</td><td>Cr</td><td>43</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>E</td><td>640⁰_{-0,1}</td><td>Cmm</td><td>639,96</td><td></td><td>P11 100</td><td>Cr</td><td>100</td><td>Ø</td><td>B1 181</td><td>µm</td><td>180,97</td></tr><tr><td></td><td>G</td><td>800^{+0,2}_{-0,2}</td><td>Cmm</td><td>800,003</td><td></td><td>P12 100</td><td>Cr</td><td>100</td><td>Ø</td><td>C1 38^{+0,05}_{+0,025}</td><td>µm</td><td>38,05</td></tr><tr><td>//</td><td>g</td><td>0,05</td><td>Cmm</td><td>0,038</td><td></td><td>M 288^{+0,1}_{-0,1}</td><td>Cmm</td><td>287,981</td><td></td><td>D1 8</td><td>Cr</td><td>8,49</td></tr><tr><td>//</td><td>t</td><td>0,05</td><td>Cmm</td><td>0,006</td><td></td><td>O2 43</td><td>Cr</td><td>43</td><td>Ø</td><td>S1 215</td><td>Cr</td><td>215</td></tr><tr><td>//</td><td>u</td><td>0,035</td><td>Cmm</td><td>0,01</td><td></td><td>P21 100</td><td>Cr</td><td>100</td><td>Ø</td><td>Y1 M12</td><td>Pg</td><td>M12</td></tr><tr><td>//</td><td>v</td><td>0,05</td><td>Cmm</td><td>0,005</td><td></td><td>P22 100</td><td>Cr</td><td>100</td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>W</td><td>160</td><td>Cmm</td><td>160,002</td><td>Ø</td><td>T M24</td><td>Pg</td><td>M24</td><td>Ø</td><td>B2 181</td><td>µm</td><td>180,89</td></tr><tr><td>//</td><td>w</td><td>0,04</td><td>Cmm</td><td>0,007</td><td colspan="4">OUTPUT PINION</td><td>Ø</td><td>C2 38^{+0,05}_{+0,025}</td><td>µm</td><td>38,05</td></tr><tr><td></td><td>X</td><td>160</td><td>Cmm</td><td>160,014</td><td colspan="4">Pinion 1</td><td>J243</td><td></td><td>D2 8</td><td>Cr</td><td>8,49</td></tr><tr><td>//</td><td>x</td><td>0,04</td><td>Cmm</td><td>0,007</td><td colspan="4">Span dimension over 3 teeth</td><td></td><td></td><td>Ø</td><td>S2 215</td><td>Cr</td><td>215</td></tr><tr><td></td><td>H</td><td>320^{+0,04}_{-0,04}</td><td>Cmm</td><td>320,016</td><td></td><td>G1 46,9⁰_{-0,03}</td><td>Cmm</td><td>46,885</td><td></td><td></td><td>Ø</td><td>Y2 M12</td><td>Pg</td><td>M12</td></tr><tr><td>//</td><td>h</td><td>0,02</td><td>Cmm</td><td>0,009</td><td>↗</td><td>g1 0,022</td><td>Di</td><td>0,01</td><td colspan="4">Line</td><td>Stiffness</td></tr><tr><td></td><td>A1</td><td>404,5</td><td>Cmm</td><td>405,367</td><td colspan="4">Pinion 2</td><td>J239</td><td colspan="2">Torsional stiffness (Nm/arcmin)</td><td>1</td><td>745,99</td></tr><tr><td></td><td>L1</td><td>120</td><td>Cmm</td><td>120,251</td><td colspan="4">Span dimension over 3 teeth</td><td></td><td colspan="2">Radial stiffness (N/µm)</td><td>1</td><td>1296</td></tr><tr><td></td><td>A2</td><td>404,5</td><td>Cmm</td><td>405,367</td><td></td><td>G2 46,9⁰_{-0,03}</td><td>Cmm</td><td>46,885</td><td colspan="2"></td><td>2</td><td>1175</td></tr><tr><td></td><td>L2</td><td>120</td><td>Cmm</td><td>120,302</td><td>↗</td><td>g2 0,022</td><td>Di</td><td>0,01</td><td colspan="4">Noise level</td></tr><tr><td colspan="4"></td><td colspan="4">No-load input torque</td><td colspan="4">@1300 rpm input (dB(A))</td><td colspan="2">64,0</td></tr><tr><td colspan="4"></td><td colspan="4">Line 1</td><td colspan="2">2 Nm</td><td colspan="4"></td></tr><tr><td colspan="4"></td><td colspan="4">Line 2</td><td colspan="2">2 Nm</td><td colspan="4"></td></tr></table>				HOUSING				HOUSING				MOTOR FLANGE				requirement		measure		requirement		measure		requirement		measure					C1644		O1 43	Cr	43						E	640 ⁰ _{-0,1}	Cmm	639,96		P11 100	Cr	100	Ø	B1 181	µm	180,97		G	800 ^{+0,2} _{-0,2}	Cmm	800,003		P12 100	Cr	100	Ø	C1 38 ^{+0,05} _{+0,025}	µm	38,05	//	g	0,05	Cmm	0,038		M 288 ^{+0,1} _{-0,1}	Cmm	287,981		D1 8	Cr	8,49	//	t	0,05	Cmm	0,006		O2 43	Cr	43	Ø	S1 215	Cr	215	//	u	0,035	Cmm	0,01		P21 100	Cr	100	Ø	Y1 M12	Pg	M12	//	v	0,05	Cmm	0,005		P22 100	Cr	100						W	160	Cmm	160,002	Ø	T M24	Pg	M24	Ø	B2 181	µm	180,89	//	w	0,04	Cmm	0,007	OUTPUT PINION				Ø	C2 38 ^{+0,05} _{+0,025}	µm	38,05		X	160	Cmm	160,014	Pinion 1				J243		D2 8	Cr	8,49	//	x	0,04	Cmm	0,007	Span dimension over 3 teeth						Ø	S2 215	Cr	215		H	320 ^{+0,04} _{-0,04}	Cmm	320,016		G1 46,9 ⁰ _{-0,03}	Cmm	46,885			Ø	Y2 M12	Pg	M12	//	h	0,02	Cmm	0,009	↗	g1 0,022	Di	0,01	Line				Stiffness		A1	404,5	Cmm	405,367	Pinion 2				J239	Torsional stiffness (Nm/arcmin)		1	745,99		L1	120	Cmm	120,251	Span dimension over 3 teeth					Radial stiffness (N/µm)		1	1296		A2	404,5	Cmm	405,367		G2 46,9 ⁰ _{-0,03}	Cmm	46,885			2	1175		L2	120	Cmm	120,302	↗	g2 0,022	Di	0,01	Noise level								No-load input torque				@1300 rpm input (dB(A))				64,0						Line 1				2 Nm										Line 2				2 Nm					
				HOUSING				HOUSING				MOTOR FLANGE																																																																																																																																																																																																																																																																																																	
				requirement		measure		requirement		measure		requirement		measure																																																																																																																																																																																																																																																																																															
							C1644		O1 43	Cr	43																																																																																																																																																																																																																																																																																																		
					E	640 ⁰ _{-0,1}	Cmm	639,96		P11 100	Cr	100	Ø	B1 181	µm	180,97																																																																																																																																																																																																																																																																																													
					G	800 ^{+0,2} _{-0,2}	Cmm	800,003		P12 100	Cr	100	Ø	C1 38 ^{+0,05} _{+0,025}	µm	38,05																																																																																																																																																																																																																																																																																													
				//	g	0,05	Cmm	0,038		M 288 ^{+0,1} _{-0,1}	Cmm	287,981		D1 8	Cr	8,49																																																																																																																																																																																																																																																																																													
				//	t	0,05	Cmm	0,006		O2 43	Cr	43	Ø	S1 215	Cr	215																																																																																																																																																																																																																																																																																													
				//	u	0,035	Cmm	0,01		P21 100	Cr	100	Ø	Y1 M12	Pg	M12																																																																																																																																																																																																																																																																																													
				//	v	0,05	Cmm	0,005		P22 100	Cr	100																																																																																																																																																																																																																																																																																																	
	W	160	Cmm	160,002	Ø	T M24	Pg	M24	Ø	B2 181	µm	180,89																																																																																																																																																																																																																																																																																																	
//	w	0,04	Cmm	0,007	OUTPUT PINION				Ø	C2 38 ^{+0,05} _{+0,025}	µm	38,05																																																																																																																																																																																																																																																																																																	
	X	160	Cmm	160,014	Pinion 1				J243		D2 8	Cr	8,49																																																																																																																																																																																																																																																																																																
//	x	0,04	Cmm	0,007	Span dimension over 3 teeth						Ø	S2 215	Cr	215																																																																																																																																																																																																																																																																																															
	H	320 ^{+0,04} _{-0,04}	Cmm	320,016		G1 46,9 ⁰ _{-0,03}	Cmm	46,885			Ø	Y2 M12	Pg	M12																																																																																																																																																																																																																																																																																															
//	h	0,02	Cmm	0,009	↗	g1 0,022	Di	0,01	Line				Stiffness																																																																																																																																																																																																																																																																																																
	A1	404,5	Cmm	405,367	Pinion 2				J239	Torsional stiffness (Nm/arcmin)		1	745,99																																																																																																																																																																																																																																																																																																
	L1	120	Cmm	120,251	Span dimension over 3 teeth					Radial stiffness (N/µm)		1	1296																																																																																																																																																																																																																																																																																																
	A2	404,5	Cmm	405,367		G2 46,9 ⁰ _{-0,03}	Cmm	46,885			2	1175																																																																																																																																																																																																																																																																																																	
	L2	120	Cmm	120,302	↗	g2 0,022	Di	0,01	Noise level																																																																																																																																																																																																																																																																																																				
				No-load input torque				@1300 rpm input (dB(A))				64,0																																																																																																																																																																																																																																																																																																	
				Line 1				2 Nm																																																																																																																																																																																																																																																																																																					
				Line 2				2 Nm																																																																																																																																																																																																																																																																																																					
				Date: 15/03/2021																																																																																																																																																																																																																																																																																																									
				Visa: P VASLIER																																																																																																																																																																																																																																																																																																									
				Version: A																																																																																																																																																																																																																																																																																																									
Product images are for illustrative purposes only.																																																																																																																																																																																																																																																																																																													

REDEX		ZI-BP79 F45210 FERRIERES www.redex.fr	Tel: +33 2 38 94 42 00 Fax: +33 2 38 94 42 99 Email: info@redex.fr
REDEX		ZI-BP79 F45210 FERRIERES www.redex.fr	Tel: +33 2 38 94 42 00 Fax: +33 2 38 94 42 99 Email: info@redex.fr