

CUSTOMER:	FOWEI	CUSTOMER ORDER REF:	RXCN2020101002 FOWEI
DISTRIBUTOR:	REDEX SHANGHAI REPAIRING	REDEX ORDER REF:	215666
DESIGNATION:	KRP1+R.31.4.H	SERIAL NUMBER:	905011
CODE:	RX129591-12	MOTOR FLANGE CODE:	RX129592-06

For the installation, please refer to User Manual KRP (182/008)

SPECIFIC REMARKS:


Product images are for illustrative purposes only.

REDEX

ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr

EXTERNAL DIMENSIONS & INTERFACES: SN: 905011

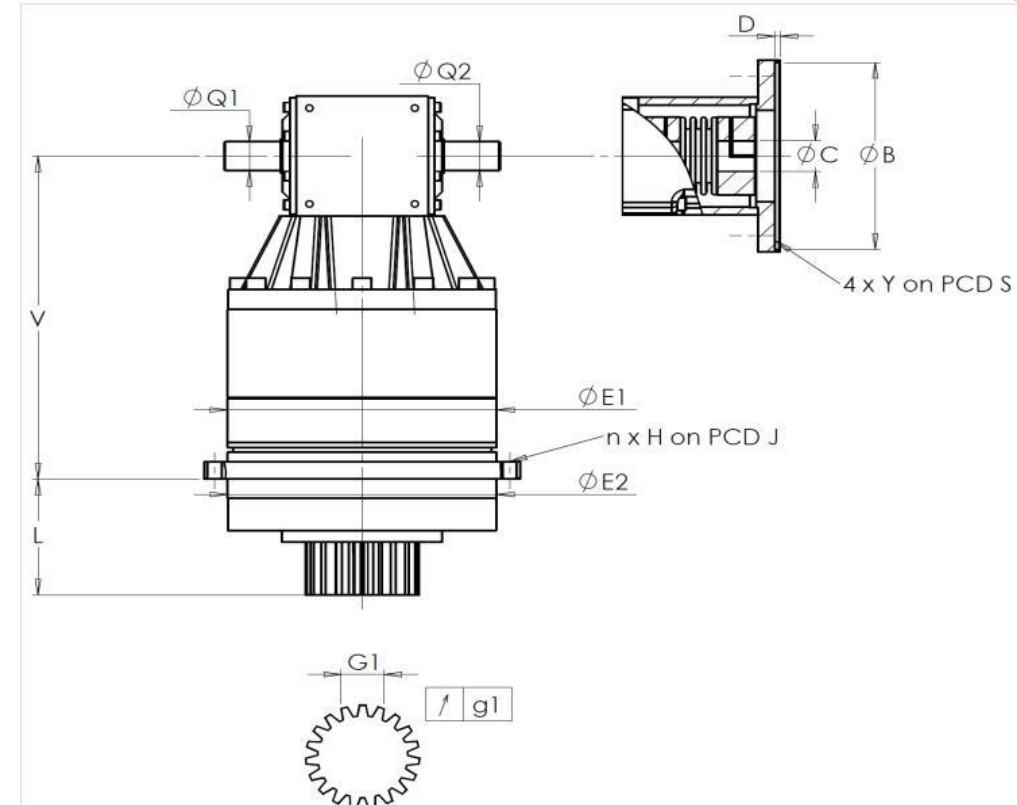

General tolerance: Js13	<i>Cmm</i>	Automatic / manual coordinate-measuring machine	μm	Micrometer	<i>Cr</i>	Calliper rule	<i>Di</i>	Dial indicator	<i>Pg</i>	Plug gauge
-------------------------	------------	--	---------------	------------	-----------	---------------	-----------	----------------	-----------	------------

HOUSING					OUTPUT PINION					MOTOR FLANGE							
requirement					measure		requirement				measure		requirement			measure	
					D1461						K72					A2982	
	E1	152h7 ⁰ _{-0,04}	μm	151,99	Span dimension over 3 teeth					∅	B	110G7 ^{+0,047} _{+0,012}	μm	110,036			
	E2	140h7 ⁰ _{-0,04}	μm	139,985		G1	23,28 ⁰ _{-0,03}	Cmm	23,26	∅	C	24F7 ^{+0,041} _{+0,020}	μm	24,035			
	n x H on PCD J	12 Ø6,5 on PCD 168	Cr	12 Ø6,5 on	↗	g1	0,021	Di	0,01		D	5	Cr	5,1			
			Cr	PCD 168						∅	S1	145	Cr	145			
	V	228,5	μm	228,35	No-load input torque					∅	Y1	M8	Pg	M8			
	L	71	μm	70,73	Line 1				0,5 Nm								
∅	Q1	20 ^{+0,009} _{-0,004}	μm	20,005						Noise level							
∅	Q2	20 ^{+0,009} _{-0,004}	μm	20,005				Line	Stiffness	@1600 rpm input (dB(A))			68,0				
					Torsional stiffness (Nm/arcmin)		1	81,39									
					Radial stiffness (N/μm)		1	388									

Date: 29/03/2021

Visa: P VASLIER

Version: A

REDEX

ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr