

KRP		Page	
Scheda di prestazione		RX183-006-A	
CLIENTE:		594 PIETRO CARNAGHI	
DISTRIBUTORE:		216287	
DESIGNAZIONE:		906086	
RIFERIMENTO:		RX129551-01	

PIETRO CARNAGHI	RIF. ORDINE CLIENTE:	594 PIETRO CARNAGHI
ANDANTEX S.r.l	ORDINE INTERNO:	216287
KRP4+R.31.4.H	NUMERO DI SERIE:	906086
RX129176-12	RIFERIMENTO DELLA FLANGIA MOTORE:	RX129551-01

Per l'installazione, fare riferimento al manuale d'uso KRP (182/008)

OSSERVAZIONE SPECIFICA:


Le immagini dei prodotti sono a carattere puramente illustrativo.

REDEX

1, Rue Paul De Fontenay
F- 45210 FERRIERES
www.redex-group.com

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex-group.com

KRP		Page
Scheda di prestazione		RX183-006-A
INTERFACCE E DIMENSIONI ESTERNE:		SN: 906086

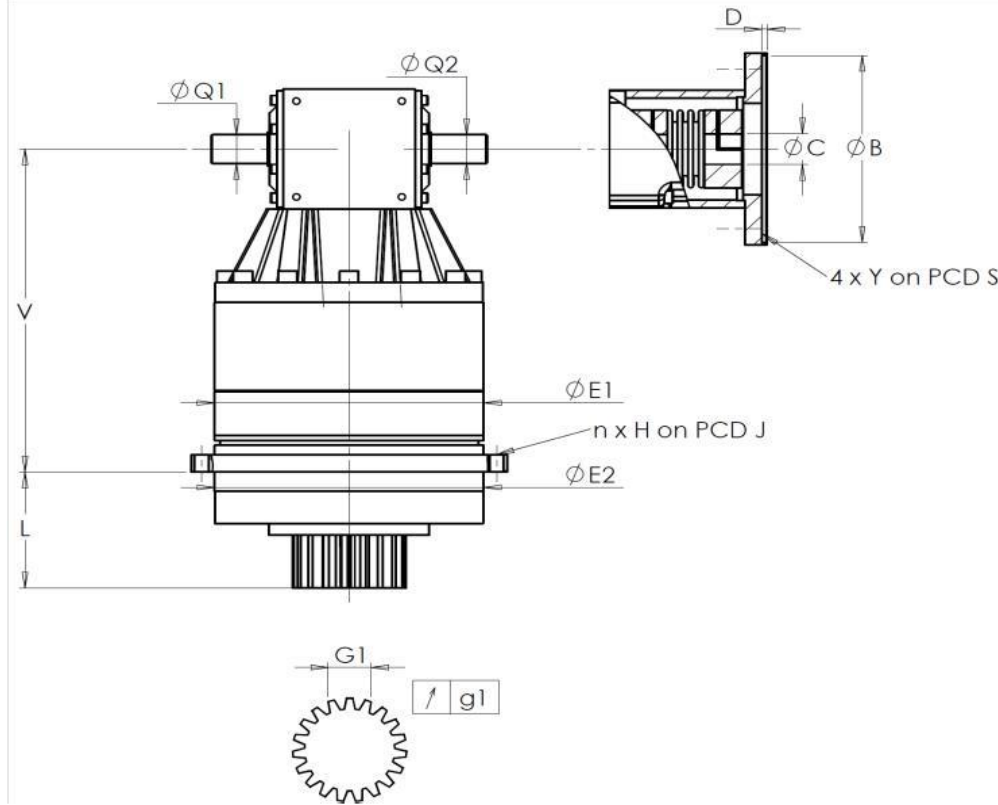

Technical drawing of the KRP RX183-006-A interface and dimensions. The drawing shows a top view of the motor housing with dimensions: $\phi Q1$, $\phi Q2$, V , L , $\phi E1$, $\phi E2$, $n \times H$ on PCD J, and ϕC . A side view shows dimensions: D , ϕB , $4 \times Y$ on PCD S, and $G1$. A detail of the gear shows dimension $g1$.

General tolerance: Js13			Cmm	Automatic / manual coordinate-measuring machine			µm	Micrometer		Cr	Calliper rule		Di	Dial indicator		Pg	Plug gauge												
CASSA ESTERNA							PIGNONE IN USCITA							FLANGIA DEL MOTORE															
		richiesta				misurata				richiesta				misurata				richiesta				misurata							
						E4512								J2410								E5381							
		E1		285h7 ⁰ _{-0,052}		µm		284,96		Scostamento (su 3 denti)							Ø		B		180 ^{+0,054} _{+0,014}		µm		180,016				
		E2		285h7 ⁰ _{-0,052}		µm		284,99				G1		46,9 ⁰ _{-0,03}		Cmm		46,88		Ø		C		38 ^{+0,05} _{+0,025}		µm		38,05	
n x H on PCD J		16 Ø14 on PCD 310		Cr		16 Ø14 on PCD 310		 g1 0,022 Di 0,01									D		8		Cr		8,11						
															Ø		S1		215		Cr		215,01						
		V		414,3		µm		414,18		Coppia in ingresso a vuoto							Ø		Y1		M12		Pg		M12				
		L		141		µm		141,05				linea 1		2,6 Nm		Livello di rumore													
Ø		Q1		35 ^{+0,011} _{-0,005}		µm		35,003																					
Ø		Q2		35 ^{+0,011} _{-0,005}		µm		35,006				Linea		Rigidità									@1300 rpm entrata (dB(A))		69,5				
								Rigidità torsionale (Nm/arcmin)		1		574,81																	
								Rigidità radiale (N/µm)		1		1332																	

Date: 21/02/2022

Visa: P VASLIER

Version: A

REDEX

1, Rue Paul De Fontenay
F- 45210 FERRIERES
www.redex-group.com

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex-group.com