


CUSTOMER: **ACCELERATED MACHINE** CUSTOMER ORDER REF: **\*33133-00 ACCELERATED MACH**  
 DISTRIBUTOR: **ANDANTEX INCORPORATED** REDEX ORDER REF: **217575**  
 DESIGNATION: **KRP4+M.21.3.H.35/48** SERIAL NUMBER: **907595**  
 CODE: **RX128414-11** MOTOR FLANGE CODE: **RX129618-08**

EXTERNAL DIMENSIONS & INTERFACES: SN: **907595**

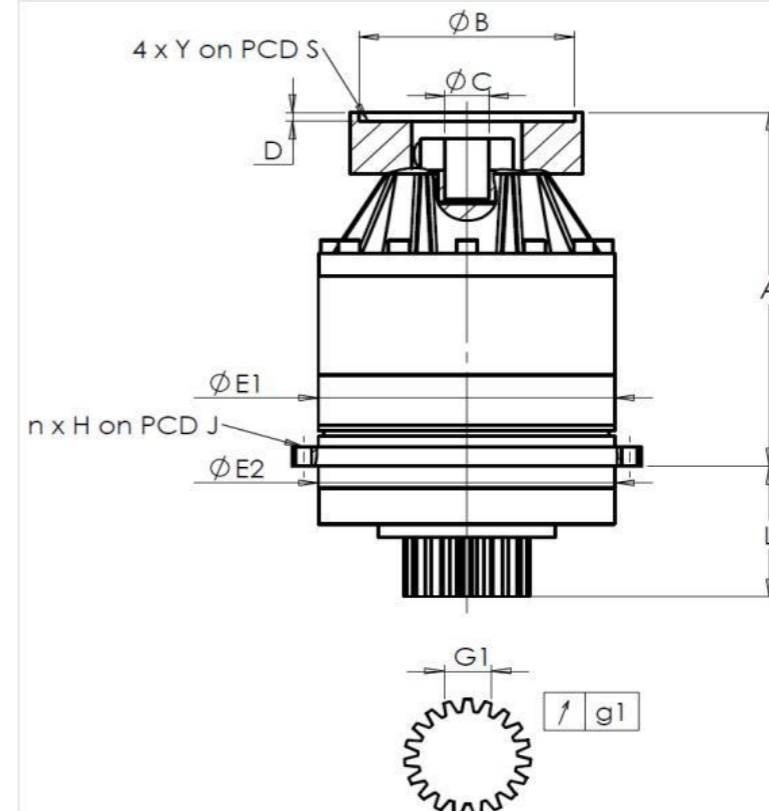

General tolerance: Js13 *Cmm* Automatic / manual coordinate-measuring machine  $\mu m$  Micrometer *Cr* Calliper rule *Di* Dial indicator *Pg* Plug gauge

For the installation, please refer to User Manual KRP (182/008)

SPECIFIC REMARKS:

HOUSING				OUTPUT PINION				MOTOR FLANGE			
requirement		measure		requirement		measure		requirement		measure	
		F5593				F528					
E1	285h7 <sup>0</sup> <sub>-0,052</sub> $\mu m$		284,96	Span dimension over 3 teeth				Ø B	251	$\mu m$	251
E2	285h7 <sup>0</sup> <sub>-0,052</sub> $\mu m$		284,96	G1	46,9 <sup>0</sup> <sub>-0,03</sub> <i>Cmm</i>		46,89	Ø C	48 <sup>+0,05</sup> <sub>+0,025</sub> $\mu m$		48,025
n x H on PCD J	16 Ø14 on PCD 310	<i>Cr</i>	16 Ø14 on PCD 310	g1	0,022	<i>Di</i>	0,02	Ø D	8	<i>Cr</i>	8,5
A	374,5	$\mu m$	375,23	No-load input torque				Ø S1	300	<i>Cr</i>	300
L	141	$\mu m$	140,9	Line 1			2,3 Nm	Ø Y1	M18	<i>Pg</i>	M18

			Noise level	
			@1300 rpm input (dB(A))	
	Line	Stiffness		60,5
Torsional stiffness (Nm/arcmin)	1	574,81		
Radial stiffness (N/ $\mu m$ )	1	1127		

Date: **22/05/2023**

Visa: **C DE MIRANDA**

Version: **A**

Product images are for illustrative purposes only.