


CUSTOMER: **ACCELERATED MACHINE** CUSTOMER ORDER REF: ***33133-00 ACCELERATED MACH**
 DISTRIBUTOR: **ANDANTEX INCORPORATED** REDEX ORDER REF: **217575**
 DESIGNATION: **KRP4+M.21.3.H.35/48** SERIAL NUMBER: **907596**
 CODE: **RX128414-11** MOTOR FLANGE CODE: **RX129618-08**

EXTERNAL DIMENSIONS & INTERFACES: SN: **907596**

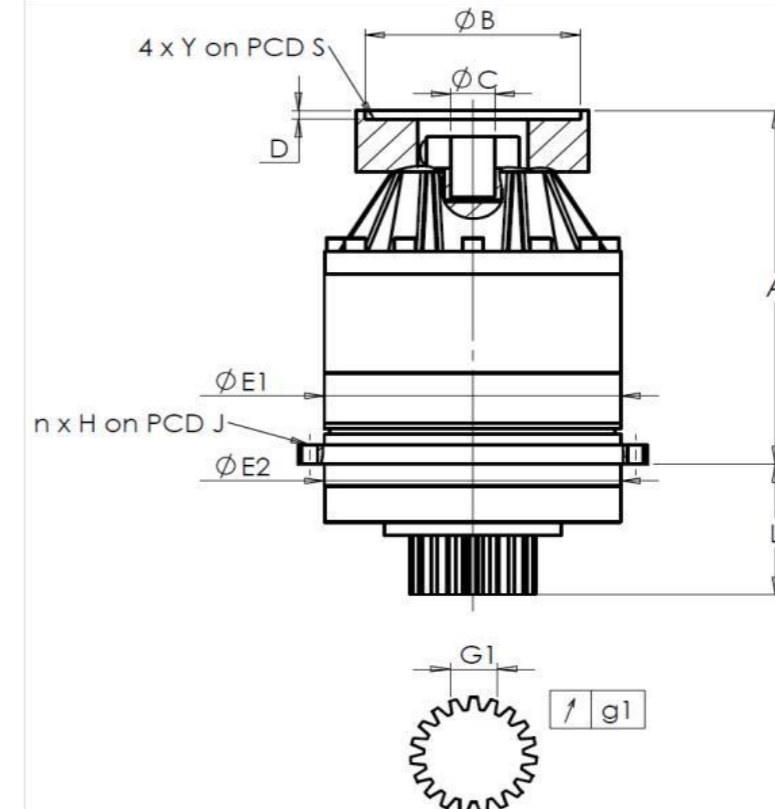

General tolerance: Js13 Cmm Automatic / manual coordinate-measuring machine µm Micrometer Cr Calliper rule Di Dial indicator Pg Plug gauge

For the installation, please refer to User Manual KRP (182/008)

SPECIFIC REMARKS:

HOUSING				OUTPUT PINION				MOTOR FLANGE			
requirement		measure		requirement		measure		requirement		measure	
		F5594				F530					
E1	285h7 ⁰ _{-0,052} µm	284,96	Span dimension over 3 teeth				Ø B	251 µm	251		
E2	285h7 ⁰ _{-0,052} µm	284,96	G1	46,9 ⁰ _{-0,03} Cmm	46,88	Ø C	48 ^{+0,05} _{+0,025} µm	48,03			
n x H on PCD J	16 Ø14 on PCD 310	Cr 16 Ø14 on PCD 310	g1	0,022	Di 0,02	Ø D	8	Cr 8,5			
A	374,5 µm	375,22	No-load input torque				Ø S1	300	Cr 300		
L	141 µm	140,93	Line 1		2,2 Nm		Ø Y1	M18	Pg M18		

Noise level		
	Line	Stiffness
Torsional stiffness (Nm/arcmin)	1	574,81
Radial stiffness (N/µm)	1	1143

@1300 rpm input (dB(A)) 61,0

Date: **22/05/2023**

Visa: **C DE MIRANDA**

Version: **A**

Product images are for illustrative purposes only.