


CUSTOMER: **YONG JU PRECISION TECHNOLOGY** CUSTOMER ORDER REF: **RX112302T**
 DISTRIBUTOR: **REDEX** REDEX ORDER REF: **217820**
 DESIGNATION: **KRP2.R1.31.4.H** SERIAL NUMBER: **907998**
 CODE: **RX133930-12** MOTOR FLANGE CODE:

EXTERNAL DIMENSIONS & INTERFACES: SN: **907998**

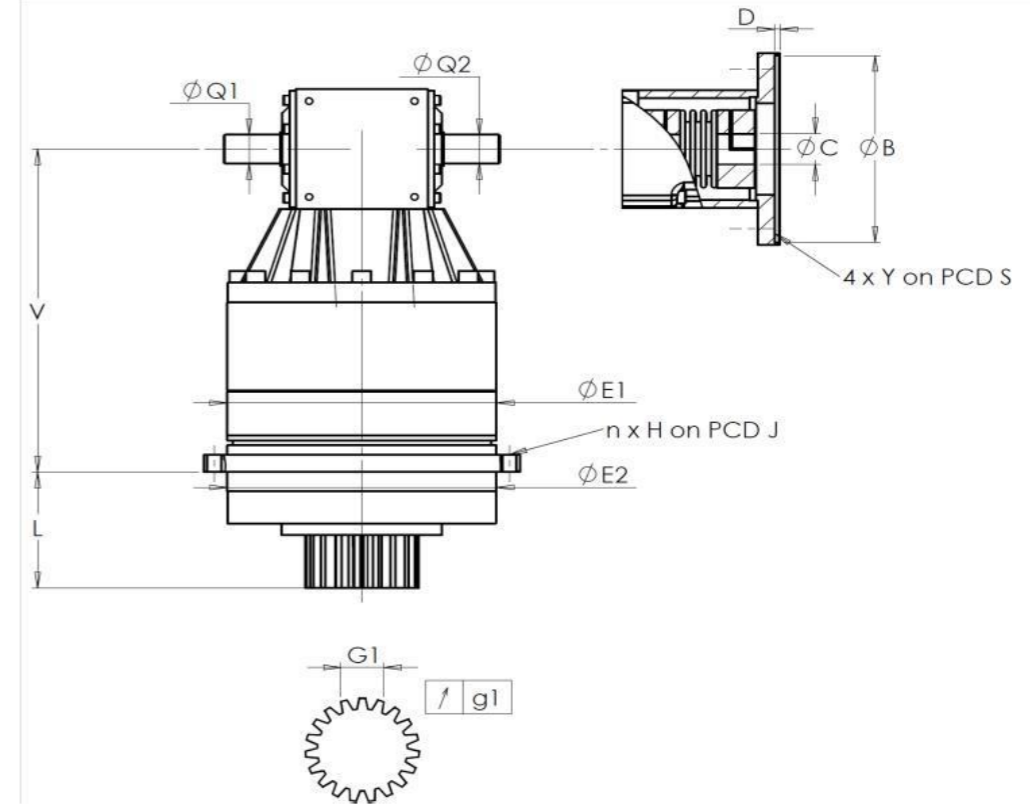

For the installation, please refer to User Manual KRP (182/008)

SPECIFIC REMARKS:

General tolerance: Js13 *Cmm* Automatic / manual coordinate-measuring machine μm Micrometer *Cr* Calliper rule *Di* Dial indicator *Pg* Plug gauge

HOUSING				OUTPUT PINION				MOTOR FLANGE			
requirement		measure		requirement		measure		requirement		measure	
		F3561				F3732					
E1	212h7 ⁰ _{-0,046} μm		211,985	Span dimension over 4 teeth				\emptyset	B		μm
E2	200h7 ⁰ _{-0,046} μm		199,99	\nearrow G1	44,27 ⁰ _{-0,03} <i>Cmm</i>		44,25	\emptyset	C		μm
n x H on PCD J	12 \emptyset 9 on PCD 233	<i>Cr</i>	12 \emptyset 9 on PCD 233	\nearrow g1	0,022	<i>Di</i>	0,01	\emptyset	D		<i>Cr</i>
V	289	μm	289,37	No-load input torque				\emptyset	S1		<i>Cr</i>
L	94	μm	93,91	Line 1		1 Nm		\emptyset	Y1		<i>Pg</i>
\emptyset Q1	25	^{+0,009} _{-0,004} μm	24,996	Noise level							
\emptyset Q2	25	^{+0,009} _{-0,004} μm	25,003		Line	Stiffness	@1600 rpm input (dB(A))		72,0		
				Torsional stiffness (Nm/arcmin)	1	243,75					
				Radial stiffness (N/ μm)	1	614					

Date: **04/10/2023**

Visa: **C DE MIRANDA**

Version: **A**

Product images are for illustrative purposes only.