


CUSTOMER: **CHR** CUSTOMER ORDER REF: ***RXCN2023062942 CHR**
 DISTRIBUTOR: **REDEX SHANGHAI REPAIRING** REDEX ORDER REF: **217972**
 DESIGNATION: **KRP5+M.91.3.S.22/32** SERIAL NUMBER: **908135**
 CODE: **RX135359-33** MOTOR FLANGE CODE: **RX135358-00**

EXTERNAL DIMENSIONS & INTERFACES: SN: **908135**

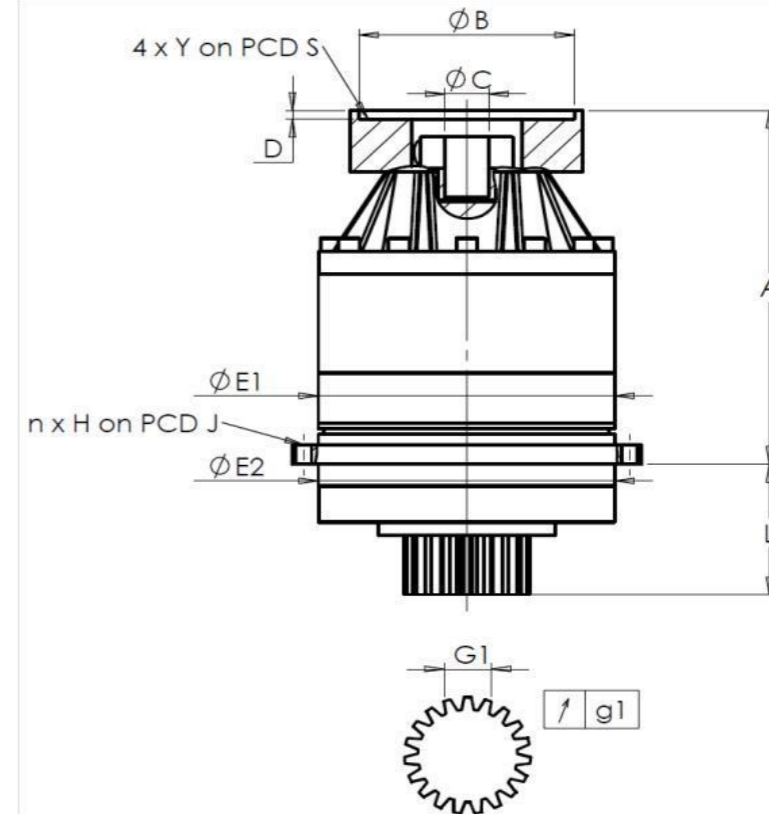

For the installation, please refer to User Manual KRP (182/008)

SPECIFIC REMARKS:

General tolerance: Js13 *Cmm* Automatic / manual coordinate-measuring machine μm Micrometer *Cr* Calliper rule *Di* Dial indicator *Pg* Plug gauge

HOUSING				OUTPUT PINION				MOTOR FLANGE				
requirement		measure		requirement		measure		requirement		measure		
		G125				M3506						
E1	355j6 ^{+0,018} / _{-0,018}	μm	354,99	Span dimension over 3 teeth				Ø	B	111	μm	111
E2	355j6 ^{+0,018} / _{-0,018}	μm	355	G1	62,54 ⁰ / _{-0,05}	<i>Cmm</i>	62,515	Ø	C	32F7 ^{+0,05} / _{+0,025}	μm	32,04
n x H on PCD J	12 Ø17,5 on PCD 385	<i>Cr</i>	12 Ø17,5 on PCD 385	g1	0,03	<i>Di</i>	0,01	Ø	D	13	<i>Cr</i>	13,5
A	421	μm	421,8	No-load input torque				Ø	S1	130	<i>Cr</i>	130
L	178	μm	177,96	Line 1		1,2 Nm		Ø	Y1	4xM8	<i>Pg</i>	4xM8

			Noise level	
			@1000 rpm input (dB(A))	56,5
Torsional stiffness (Nm/arcmin)	1	1076,47		
Radial stiffness (N/ μm)	1	1393		

Date: **25/01/2024**

Visa: **C DE MIRANDA**

Version: **A**

Product images are for illustrative purposes only.