


CUSTOMER: **GERIB ASSISTANCE** CUSTOMER ORDER REF: **\*AUX23\_005 GAT**  
 DISTRIBUTOR: **REDEX ORDER REF: 218158**  
 DESIGNATION: **KRP1+M.7.3.H.28/38** SERIAL NUMBER: **908237**  
 CODE: **RX129833-02** MOTOR FLANGE CODE: **RX128581-01**

EXTERNAL DIMENSIONS & INTERFACES: SN: **908237**

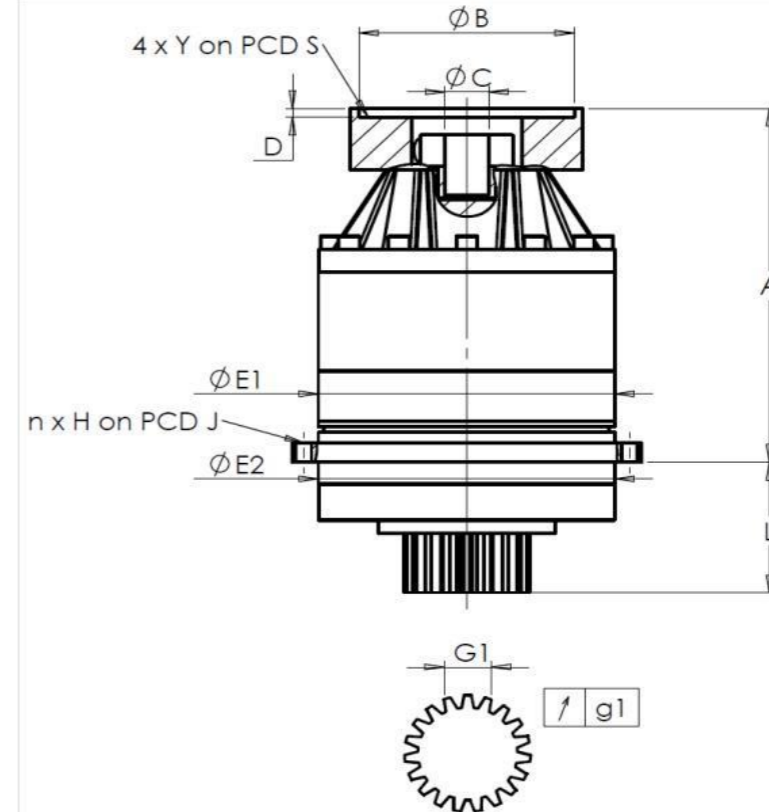

For the installation, please refer to User Manual KRP (182/008)

SPECIFIC REMARKS:

General tolerance: Js13 *Cmm* Automatic / manual coordinate-measuring machine  $\mu\text{m}$  Micrometer *Cr* Calliper rule *Di* Dial indicator *Pg* Plug gauge

HOUSING				OUTPUT PINION				MOTOR FLANGE				
requirement		measure		requirement		measure		requirement		measure		
		G1951				F582						
E1	152h7 <sup>0</sup> <sub>-0,04</sub>	$\mu\text{m}$	151,99	Span dimension over 3 teeth				Ø	B	181	$\mu\text{m}$	181
E2	140h7 <sup>0</sup> <sub>-0,04</sub>	$\mu\text{m}$	139,99	G1	23,28 <sup>0</sup> <sub>-0,03</sub>	<i>Cmm</i>	23,265	Ø	C	38	$\mu\text{m}$	38,025
n x H on PCD J	12 Ø6,5 on PCD 168	<i>Cr</i>	12 Ø6,5 on PCD 168	g1	0,021	<i>Di</i>	0,02	Ø	D	8	<i>Cr</i>	8,55
A	217	$\mu\text{m}$	217,77	No-load input torque				Ø	S1	215	<i>Cr</i>	215
L	71	$\mu\text{m}$	70,72	Line 1			0,6 Nm	Ø	Y1	M12	<i>Pg</i>	M12

		Line	Stiffness	Noise level	
				@1600 rpm input (dB(A))	64,0
Torsional stiffness (Nm/arcmin)	1	81,39			
Radial stiffness (N/ $\mu\text{m}$ )	1	405			

Date: **14/12/2023**

Visa: **C DE MIRANDA**

Version: **A**

Product images are for illustrative purposes only.