


CUSTOMER: **FIVES MACHINING** CUSTOMER ORDER REF: **\*F100/4500128503/00 FIVES**  
 DISTRIBUTOR: **REDEX ORDER REF: 218272**  
 DESIGNATION: **KRP4+M.61.3.H.35/48** SERIAL NUMBER: **908440**  
 CODE: **RX128414-32** MOTOR FLANGE CODE: **RX128583-01**

EXTERNAL DIMENSIONS & INTERFACES: SN: **908440**

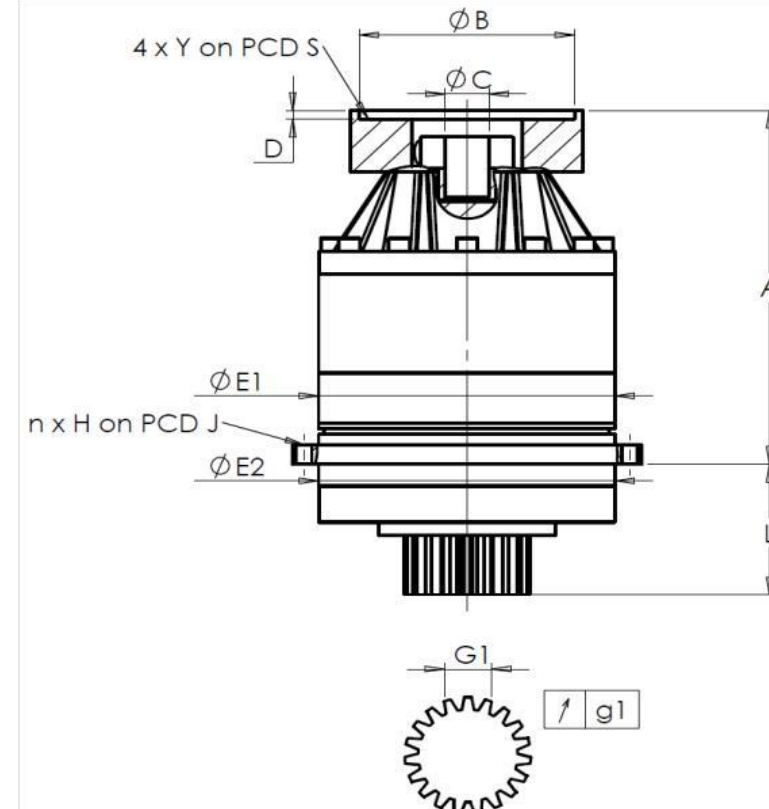

General tolerance: Js13 Cmm Automatic / manual coordinate-measuring machine µm Micrometer Cr Calliper rule Di Dial indicator Pg Plug gauge

For the installation, please refer to User Manual KRP (182/008)

SPECIFIC REMARKS:

HOUSING				OUTPUT PINION				MOTOR FLANGE			
requirement		measure		requirement		measure		requirement		measure	
		G2054				G3500					
E1	285h7 <sup>0</sup> <sub>-0,052</sub> µm		284,96	Span dimension over 3 teeth				Ø B	181 µm		181
E2	285h7 <sup>0</sup> <sub>-0,052</sub> µm		284,96	G1	46,9 <sup>0</sup> <sub>-0,03</sub> Cmm		46,88	Ø C	38 <sup>+0,05</sup> <sub>+0,025</sub> µm		38,04
n x H on PCD J	16 Ø14 on PCD 310	Cr	16 Ø14 on PCD 310	g1	0,022	Di	0,01	Ø D	8	Cr	8,5
A	373,5 µm		374,06	No-load input torque				Ø S1	215	Cr	215
L	141 µm		141,1	Line 1		0,7 Nm		Ø Y1	M12	Pg	M12

		Line	Stiffness	Noise level	
				@1300 rpm input (dB(A))	57,0
Torsional stiffness (Nm/arcmin)	1		574,81		
Radial stiffness (N/µm)	1		1352		

Date: **26/01/2024**

Visa: **C DE MIRANDA**

Version: **A**

Product images are for illustrative purposes only.