


CUSTOMER: **DMG** CUSTOMER ORDER REF:   
 DISTRIBUTOR:  REDEX ORDER REF: **220363**  
 DESIGNATION: **DRPX0+M.10.3.XH.V1.22/32** SERIAL NUMBER: **910298**  
 CODE: **RX134606-03** MOTOR FLANGE CODE:

EXTERNAL DIMENSIONS & INTERFACES: SN: **910298**

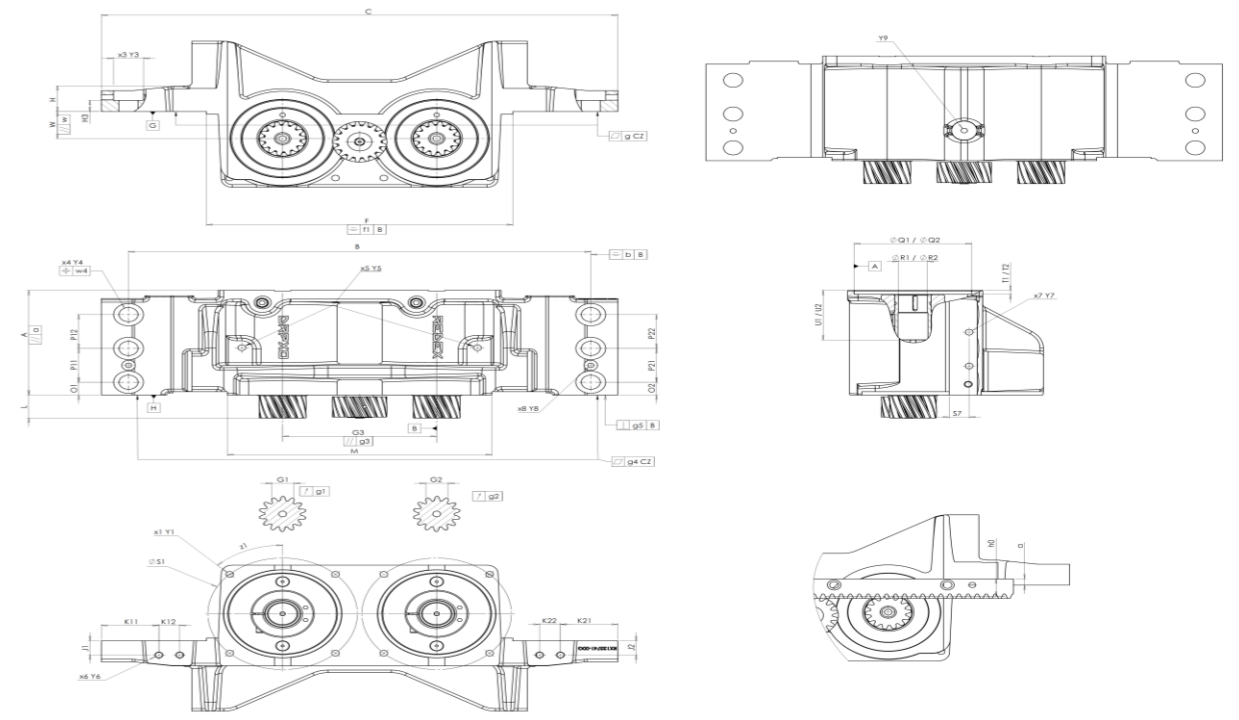

Pour la mise en service de l'appareil, se référer au User Manual DRP (182/027)

General tolerance: Js13 Cmm Automatic / manual coordinate-measuring machine μm Micrometer Cr Calliper rule Di Dial indicator Pg Plug gauge

SPECIFIC REMARKS:

HOUSING				HOUSING				MOTOR FLANGE												
requirement		measure		requirement		measure		requirement		measure										
		F3360	G	W	40 <sup>+0,025</sup> <sub>-0,025</sub>	Cmm	39.993	A	∅	Q1	130 JS6 <sup>+0,012</sup> <sub>-0,012</sub>	Cmm	130.008							
H	A	155	Cmm	155.032	//	w	0,03	Cmm	0.003	∅	R1	32 F7 <sup>+0,05</sup> <sub>+0,025</sub>	μm	32.05						
<b>OUTPUT PINION</b>					O1	19	Cmm	19		T1	6	Pg	6.026							
<b>Pinion 1</b> E3723					O2	19	Cmm	19		U1	73 min	Pg	73.21							
<b>Span dimension over 3 teeth</b>					P11	50	Cmm	50												
	G1	23,466 <sup>-0,071</sup> <sub>-0,082</sub>	Cmm	23.387		P21	50	Cmm	50	∅	Q2	130 JS6 <sup>+0,012</sup> <sub>-0,012</sub>	Cmm	130.006						
	g1	0,021	Di	0.015		P22	50	Cmm	50	∅	R2	32 F7 <sup>+0,05</sup> <sub>+0,025</sub>	μm	32.05						
<b>Pinion 2</b> E3709					P12	50	Cmm	50		T2	6	Pg	6.046							
<b>Span dimension over 3 teeth</b>				x3	Y3	2x3 ∅33	Cr	2x3 ∅33	x4	Y4	2x3 ∅21	Cmm	2x3 ∅21		U2	73 min	Pg	73.31		
	G2	23,466 <sup>-0,071</sup> <sub>-0,082</sub>	Cmm	23.39		G3	170	Cmm	169.991		w4	0,2	Cr	0,2						
	g2	0,021	Di	0.015	//	g3	0,03	Cmm	0.003		x5	Y5	2 M10x17	Cr	2 M10x17					
<b>Height setting</b>					g	0,03	Cmm	0.018		x7	Y7	2x2 M10x15	Cr	2x2 M10x15						
	h0	26	Di	25.985		g4	0,03	Cmm	0.005		S7	22	Cr	22						
	a	9.075	Di	9.0988		g5	0,05	Cmm	0.016		x8	Y8	2 M8	Cr	2 M8					
						H	38	Cr	38		x1	Y1	2x4 M10x20	Cr	2x4 M10x20					
						L	34 <sup>+0,55</sup> <sub>-0,4</sub>	Cmm	34,107/34,053	at	Z1	45°	Cr	45°						
						K21	63,5	Cr	63,5	on PCD	S1	165	Cr	165						
						K22	23	Cr	23	x6	Y6	2x2 G1/8	Cr	2x2 G1/8						
						Y9	M8x1,0	Pg	M8x1,0		J1	21	Cr	21						
						M	292	Cmm	292		J2	21	Cr	21						
						H3	16,5	Cr	16,5		K11	63,5	Cr	63,5						
											K12	23	Cr	23						

	Line	Stiffness
Torsional stiffness (Nm/arcmin)	1	40
	2	40
Radial stiffness (N/μm)	1	162
	2	154

Noise level	
@1500 rpm input (dB(A))	67.0

No-load input torque	
Line 1	0,2 Nm
Line 2	0,2 Nm

Date: **20/03/2026** Visa: **C DE MIRANDA**  
 Version: **C**

Product images are for illustrative purposes only.