

CUSTOMER: REDEXUSA **CUSTOMER ORDER REF:** REDEXU07

DISTRIBUTOR: REDEX USA **REDEX ORDER REF:** 1000052

DESIGNATION: KRPX2.M1.17.3.H.28/38 **SERIAL NUMBER:** 910569

CODE: RX134762-41 **MOTOR FLANGE CODE:** RX128581-01

For the installation, please refer to User Manual KRPX (182/010)

SPECIFIC REMARKS:


Product images are for illustrative purposes only.



1, Rue Paul De Fontenay
F- 45210 FERRIERES
www.redex-group.com

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex-group.com

EXTERNAL DIMENSIONS & INTERFACES: **SN:** 910569

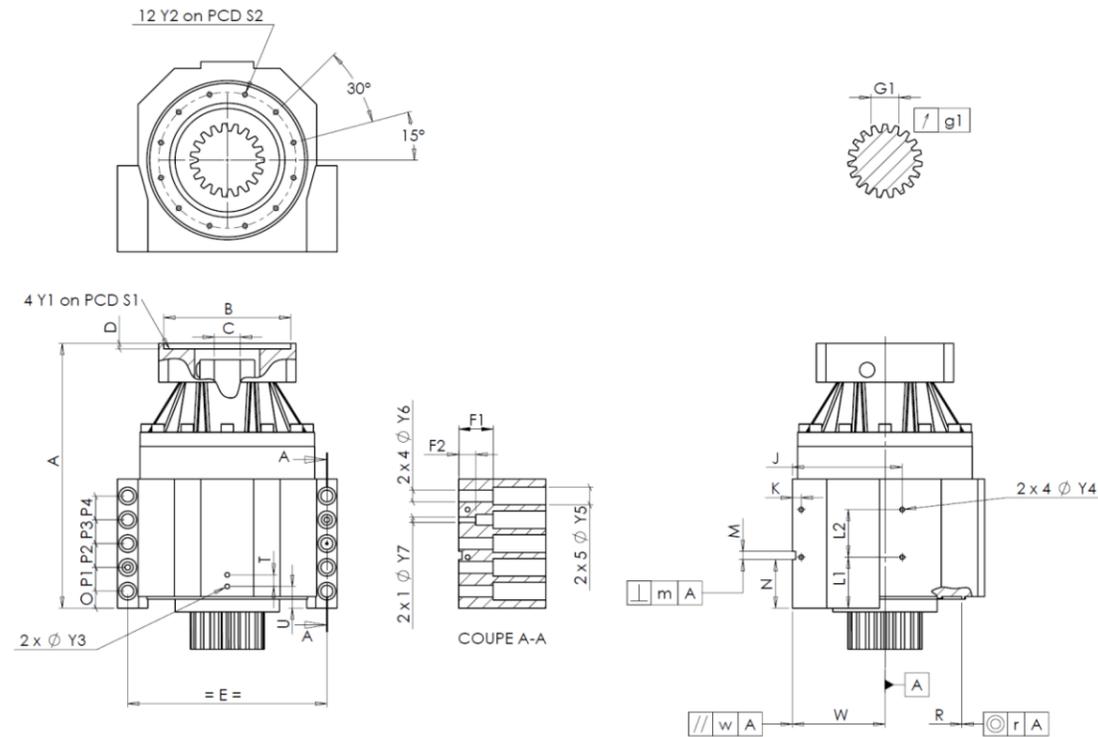

General tolerance: Js13 Cmm Automatic / manual coordinate-measuring machine μm Micrometer Cr Calliper rule Di Dial indicator Pg Plug gauge

HOUSING				HOUSING				MOTOR FLANGE						
requirement		measure		requirement		measure		requirement		measure				
H6824				L1	60	Cr	60	∅	B	181	μm	181		
∅	Y2	M6x12	Pg	M6x12	L2	60	Cr	60	∅	C	38	+0,05 +0,025	μm	38.04
	A	332	μm	332.48	J	130	Cr	130		D	8	Cr	8.5	
	E	240	Cr	240	K	11	Cr	11	∅	S1	215	Cr	215	
	O	15	Cr	15	2 x 4∅	Y4	M6x12	Pg	M6x12	∅	Y1	M12	Pg	M12
	P1	30	Cr	30	F1	40	Cr	40	No-load input torque					
	P2	30	Cr	30	F2	24	Cr	24	Line 1		2,5 Nm			
	P3	30	Cr	30	2 x 1∅	Y7	10	μm	10	Line		Stiffness		
	P4	30	Cr	30	2 x 4∅	Y6	15,5	μm	15,5	Torsional stiffness (Nm/arcmin)		1 243,75		
	T	14	Cr	14	2 x 5∅	Y5	24	μm	24	Radial stiffness (N/μm)		1 574		
	U	26	Cr	26	M H6	10	+0,009 0	Cmm	10.002					
2 x 1∅	Y3	M6x12	Pg	M6x12	⊥	m	0,05	Cmm	0.009					
	R	186	+0,2 +0,1	Cmm	186.166	A			54.959					
⊙	r	0,1	Cmm	0.019	//	w	0,03	/A	Cmm	0.004				

OUTPUT PINION				Noise level	
J5154				@1600 rpm input (dB(A))	
Span dimension over 4 teeth					
	G1	44,27	0 -0,03	Cmm	44.25
↗	g1	0,022		Di	0.01

Date: 24/02/2026

Visa: C DE MIRANDA

Version: A



1, Rue Paul De Fontenay
F- 45210 FERRIERES
www.redex-group.com

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex-group.com