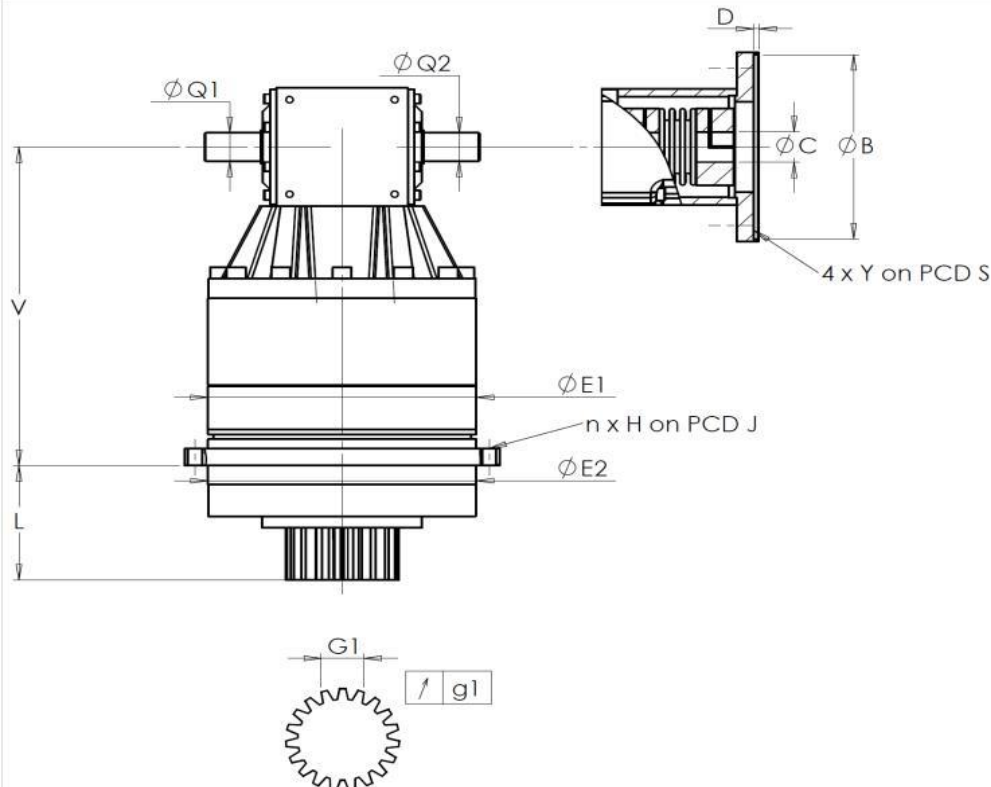


KRP				Page																
PERFORMANCE SHEET		RX183-006-A	1/2																	
CUSTOMER:	ELECTROIMPACT	CUSTOMER ORDER REF:	26048-00 ELECTROIMPACT																	
DISTRIBUTOR:	ANDANTEX INCORPORATED	REDEX ORDER REF:	210674																	
DESIGNATION:	KRP1+R.31.4.H	SERIAL NUMBER:	898949																	
CODE:	RX129591-12	MOTOR FLANGE CODE:	RX129592-07																	
For the installation, please refer to User Manual KRP (182/008) SPECIFIC REMARKS:					EXTERNAL DIMENSIONS & INTERFACES:		SN:	898949												
																				
					General tolerance: Js13		Cmm	Automatic / manual coordinate-measuring machine		µm	Micrometer	Cr	Calliper rule	Di	Dial indicator	Pg	Plug gauge			
					HOUSING				OUTPUT PINION				MOTOR FLANGE							
					requirement		measure		requirement		measure		requirement		measure					
							M869				O552									
						E1	152h7 ⁰ _{-0,04}	µm	151,98	Span dimension over 3 teeth				Ø	B	110G7 ^{+0,047} _{+0,012}	µm			
						E2	140h7 ⁰ _{-0,04}	µm	139,97		G1	23,28 ⁰ _{-0,03}	Cmm	23,265	Ø	C	24F7 ^{+0,041} _{+0,020}	µm		
					n x H on PCD J		12 Ø6,5 on PCD 168	Cr	12 Ø6,5 on PCD 168		g1	0,021	Di	0,015		D	11	Cr		
							V	228,5	µm	228,24	No-load input torque				Ø	S1	145	Cr		
							L	71	µm	70,94	Line 1		0,2 Nm		Ø	Y1	M8	Pg		
					Ø	Q1	20 ^{+0,009} _{-0,004}	µm	20,005					Noise level						
					Ø	Q2	20 ^{+0,009} _{-0,004}	µm	20					@2600 rpm input (dB(A))				65,5		
									Torsional stiffness (Nm/arcmin)		1	81,39								
									Radial stiffness (N/µm)		1	317								