


KRP				Page	
PERFORMANCE SHEET		RX183-006-A	1/2		
CUSTOMER:	ELECTROIMPACT	CUSTOMER ORDER REF:	24112-00 ELECTROIMPACT		
DISTRIBUTOR:	ANDANTEX INCORPORATED	REDEX ORDER REF:	210720		
DESIGNATION:	KRP2+R.91.4.S	SERIAL NUMBER:	899056		
CODE:	RX129235-33	MOTOR FLANGE CODE:	RX129627-02		

EXTERNAL DIMENSIONS & INTERFACES:

SN: 899056

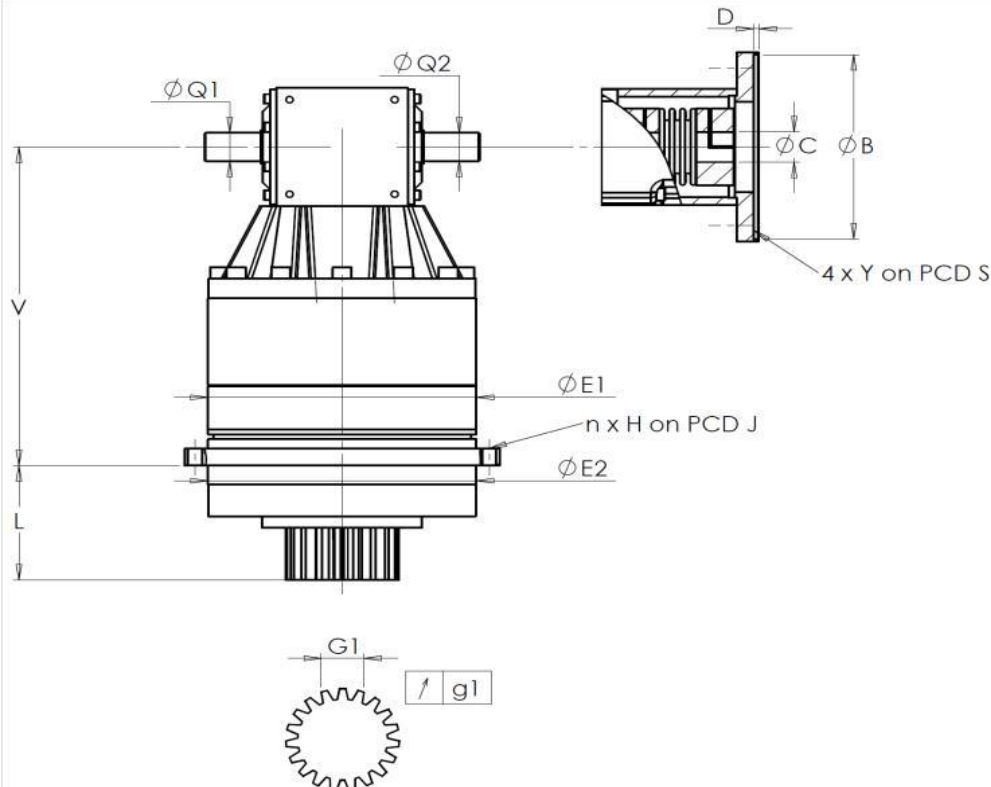

General tolerance: Js13		Cmm	Automatic / manual coordinate-measuring machine		µm	Micrometer	Cr	Calliper rule	Di	Dial indicator	Pg	Plug gauge			
HOUSING					OUTPUT PINION			MOTOR FLANGE							
requirement					measure			requirement					measure		
					M2508								Q1632		
	E1	212h7 ⁰ _{-0,046}	µm	211.98	Span dimension over 4 teeth					Ø	B	114,3 ^{+0,047} _{+0,012}	µm	/	
	E2	200h7 ⁰ _{-0,046}	µm	199.98		G1	44,27 ⁰ _{-0,03}	Cmm	44,26	Ø	C	35 ^{+0,05} _{+0,025}	µm	/	
	n x H on PCD J	12 Ø9 on PCD 233	Cr	OK		g1	0,022	Di	0,02		D	8	Cr	/	
	V	289	µm	289.47	No-load input torque					Ø	S1	200	Cr	/	
	L	94	µm	93.74	Line 1					0,5 Nm					
Ø	Q1	25 ^{+0,009} _{-0,004}	µm	25.009						Noise level					
Ø	Q2	25 ^{+0,009} _{-0,004}	µm	25.009						@2100 rpm input (dB(A))					70,0
					Torsional stiffness (Nm/arcmin)			1	243,75						
					Radial stiffness (N/µm)			1	501						

For the installation, please refer to User Manual KRP (182/008)

SPECIFIC REMARKS:

Date: 14/06/2016

Visa: J ONGANER

Version: A

Product images are for illustrative purposes only.

REDEX ANDANTEX

ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr

REDEX ANDANTEX

ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr