

KRP		Page	
PERFORMANCE SHEET		1/2	
CUSTOMER:	ELECTROIMPACT	CUSTOMER ORDER REF:	24304 ELECTROIMPACT
DISTRIBUTOR:	ANDANTEX INCORPORATED	REDEX ORDER REF:	209347
DESIGNATION:	KRP1+R.31.4.H	SERIAL NUMBER:	896962
CODE:	RX129591-12	MOTOR FLANGE CODE:	RX129592-05

For the installation, please refer to User Manual KRP (182/008)

SPECIFIC REMARKS:

Product images are for illustrative purposes only.

KRP


PERFORMANCE SHEET

RX183-006-A

Page 2/2

EXTERNAL DIMENSIONS & INTERFACES:

SN: 896962

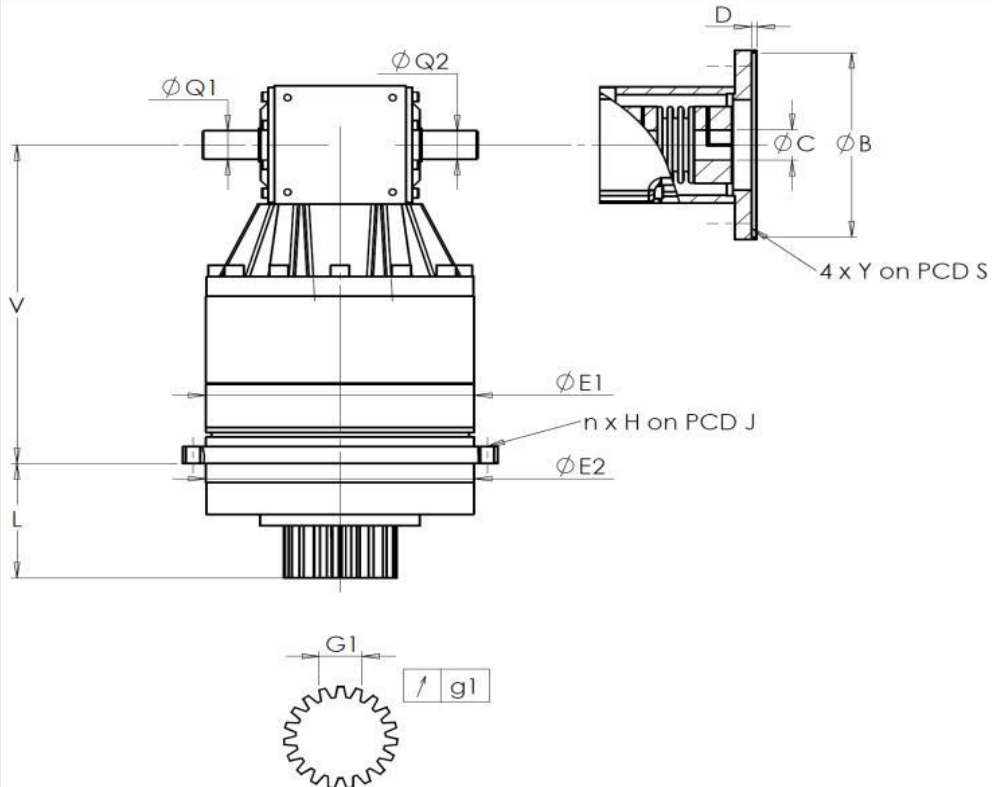

General tolerance: Js13			Cmm	Automatic / manual coordinate-measuring machine			µm	Micrometer		Cr	Calliper rule		Di	Dial indicator		Pg	Plug gauge	
HOUSING							OUTPUT PINION							MOTOR FLANGE				
		requirement		measure				requirement		measure				requirement		measure		
				K7221						Q2316						J3789		
	E1	152h7 ⁰ _{-0,04}	µm	151,985	Span dimension over 3 teeth							Ø	B	110 ^{+0,047} _{+0,012}	µm	110,023		
	E2	140h7 ⁰ _{-0,04}	µm	139,97		G1	23,28 ⁰ _{-0,03}	Cmm	23,265	Ø	C	24 ^{+0,041} _{+0,020}	µm	24,05				
n x H on PCD J		12 Ø6,5 on PCD 168	Cr	12 Ø6,5 on PCD 168		↗	g1	0,021	Di	0,02		D	5	Cr	5,09			
			Cr	PCD 168								Ø	S1	130	Cr	130		
	V	228,5	µm	228,51	No-load input torque							Ø	Y1	M8	Pg	M8		
	L	71	µm	70,81	Line 1			0,2 Nm										
Ø	Q1	20 ^{+0,009} _{-0,004}	µm	20								Noise level						
Ø	Q2	20 ^{+0,009} _{-0,004}	µm	20				Line	Stiffness	@2600 rpm input (dB(A))			71,0					
						Torsional stiffness (Nm/arcmin)		1	94									
						Radial stiffness (N/µm)		1	398									

Date: 26/03/2015

Version: A

Visa: JJ PELLÉ

