

CUSTOMER:	YONG JU PRECISION TECHNOLOGY	CUSTOMER ORDER REF:	RX108314T YONG JU
DISTRIBUTOR:	REDEX	REDEX ORDER REF:	214824
DESIGNATION:	KRP3+R.31.4.H	SERIAL NUMBER:	904586
CODE:	RX128565-12	MOTOR FLANGE CODE:	

For the installation, please refer to User Manual KRP (182/008)

SPECIFIC REMARKS:


Product images are for illustrative purposes only.

REDEX

ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr

EXTERNAL DIMENSIONS & INTERFACES: SN: 904586

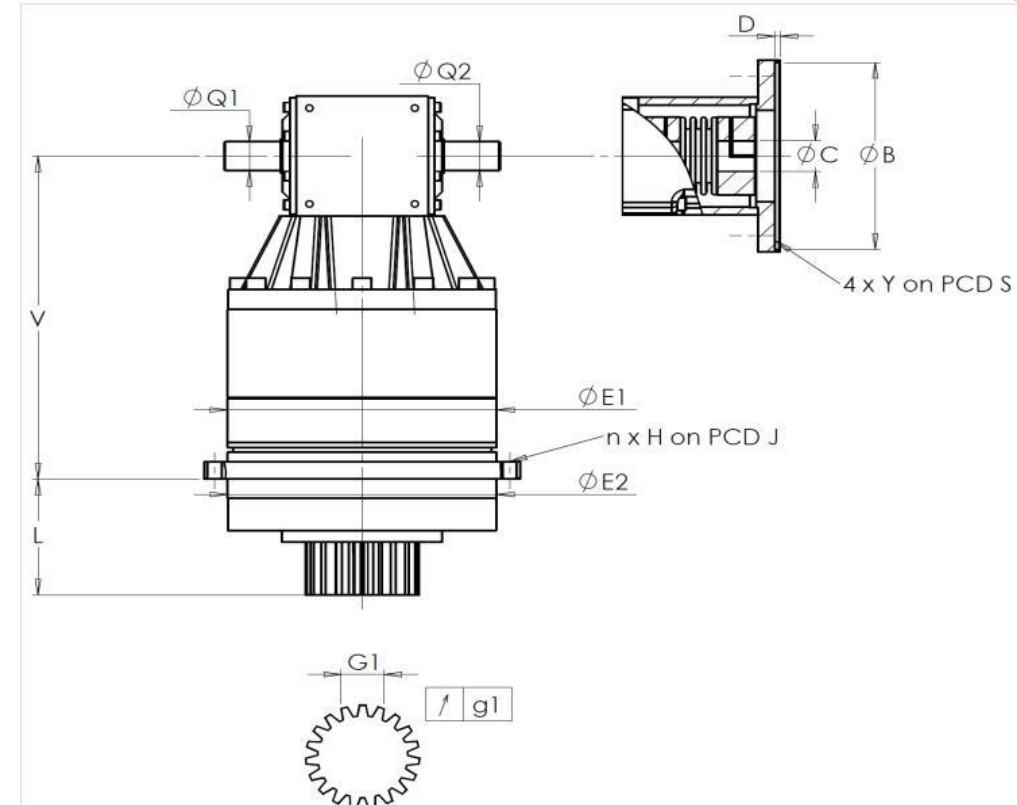

General tolerance: Js13	<i>Cmm</i>	Automatic / manual coordinate-measuring machine	μm	Micrometer	<i>Cr</i>	Calliper rule	<i>Di</i>	Dial indicator	<i>Pg</i>	Plug gauge
-------------------------	------------	--	---------------	------------	-----------	---------------	-----------	----------------	-----------	------------

HOUSING					OUTPUT PINION					MOTOR FLANGE									
requirement					measure					requirement					measure				
					C1078										K916				
		E1	255h7 ⁰ _{-0,052}	μm	254,96	Span dimension over 3 teeth					∅	B		μm					
		E2	255h7 ⁰ _{-0,052}	μm	254,97		G1	39,25 ⁰ _{-0,03}	Cmm	39,24	∅	C		μm					
n x H on PCD J		16 Ø13,5 on PCD 280	Cr	16 Ø13,5 on	↗	g1	0,022	Di	0,02		D		Cr						
			Cr	PCD 280					∅	S1		Cr							
		V	337	μm	337,4	No-load input torque					∅	Y1		Pg					
		L	121	μm	120,97	Line 1				1,4 Nm									
∅	Q1	30	^{+0,009} _{-0,004}	μm	30,009						Noise level								
∅	Q2	30	^{+0,009} _{-0,004}	μm	30,009				Line	Stiffness	@1600 rpm input (dB(A))			65,0					
						Torsional stiffness (Nm/arcmin)		1	473,03										
						Radial stiffness (N/μm)		1	929										

Date: 30/07/2020

Visa: P VASLIER

Version: A

REDEX

ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr