


CUSTOMER: **YONG JU PRECISION** CUSTOMER ORDER REF:
 DISTRIBUTOR: REDEX ORDER REF: **1000030**
 DESIGNATION: **KRP3.R1.31.4.H** SERIAL NUMBER: **910577**
 CODE: **RX135700-12** MOTOR FLANGE CODE:

EXTERNAL DIMENSIONS & INTERFACES: SN: **910577**

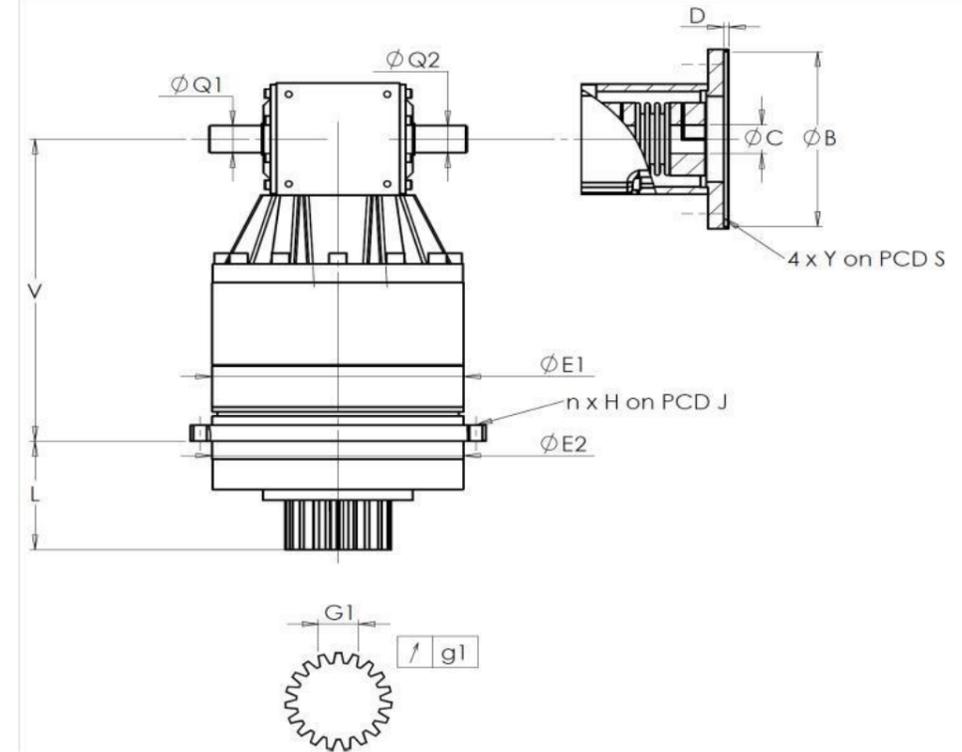

For the installation, please refer to User Manual KRP (182/008)

SPECIFIC REMARKS:

General tolerance: Js13 Cmm Automatic / manual coordinate-measuring machine μm Micrometer Cr Calliper rule Di Dial indicator Pg Plug gauge

HOUSING				OUTPUT PINION				MOTOR FLANGE					
requirement		measure		requirement		measure		requirement		measure			
J2569				J1258				-					
E1	255h7 ⁰ _{-0,052}	μm	254.975	Span dimension over 3 teeth				∅	B		μm		
E2	255h7 ⁰ _{-0,052}	μm	254.98	G1	39,25 ⁰ _{-0,03}	Cmm	39.235	∅	C		μm		
n x H on PCD J	16 ∅13,5 on PCD 280	Cr	16 ∅13,5 on PCD 280	g1	0,022	Di	0.02	∅	D		Cr		
V	337	μm	337.19	No-load input torque				∅	S1		Cr		
L	121	μm	121.01	Line 1				3,2 Nm					
∅ Q1	30	^{+0,009} _{-0,004}	μm					Noise level					
∅ Q2	30	^{+0,009} _{-0,004}	μm					Line		Stiffness		@1600 rpm input (dB(A))	67.5
				Torsional stiffness (Nm/arcmin)		1	473,03						
				Radial stiffness (N/μm)		1	1055						

Date: **09/03/2026**

Visa: **C DE MIRANDA**

Version: **A**

Product images are for illustrative purposes only.