

KRP

PERFORMANCE SHEET

RX183-006-A

Page1/2

CUSTOMER:KAO MING MACHINERY INDUST

CUSTOMER ORDER REF:RX103212T


DISTRIBUTOR:REDEX ORDER REF:208641

DESIGNATION:KRP3+R.31.4.HSERIAL NUMBER:895983

CODE:RX128565-12MOTOR FLANGE CODE:

EXTERNAL DIMENSIONS & INTERFACES:

SN:895983

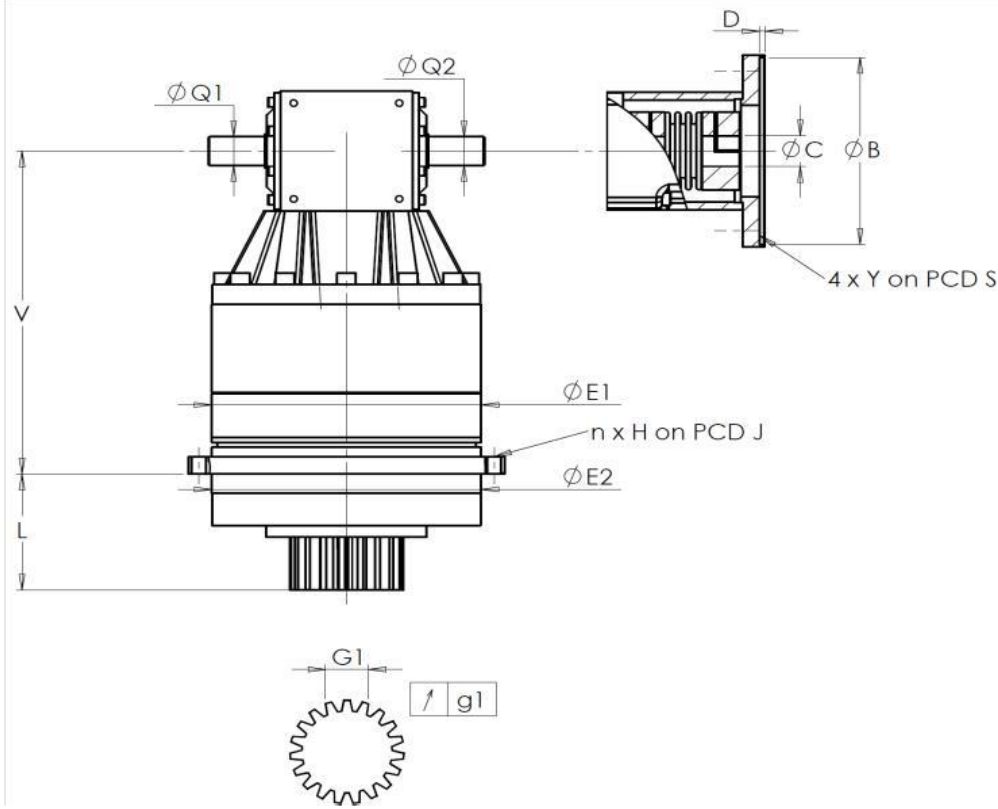

General tolerance: Js13

Cmm

Automatic / manual coordinate-measuring machine

µm

Micrometer

Cr

Calliper rule

Di

Dial indicator

Pg

Plug gauge

HOUSING					OUTPUT PINION					MOTOR FLANGE					
requirement			measure		requirement			measure		requirement			measure		
			J7869					R2131					-		
	E1	255h7 ⁰ _{-0,052}	µm	255	Span dimension over 3 teeth					Ø	B		µm		
	E2	255h7 ⁰ _{-0,052}	µm	255		G1	39,25 ⁰ _{-0,03}	Cmm	39,235	Ø	C		µm		
	n x H on PCD J	16 Ø13,5 on PCD 280	Cr	OK		g1	0,022	Di	0,01		D		Cr		
	V	337	µm	337.36	No-load input torque					Ø	S1		Cr		
	L	121	µm	120.88	Line 1					0,7 Nm	Ø	Y1		Pg	
Ø	Q1	30 ^{+0,009} _{-0,004}	µm	30.009						Noise level					
Ø	Q2	30 ^{+0,009} _{-0,004}	µm	30						@1600 rpm input (dB(A))					70,0
					Torsional stiffness (Nm/arcmin)					1	450				
					Radial stiffness (N/µm)					1	1115				

Date:24/07/2014

Version:A

Visa:JJ PELLÉ p.o. JP MOZZICONACCI



For the installation, please refer to User Manual KRP (182/008)

SPECIFIC REMARKS:

Product images are for illustrative purposes only.

REDEXANDANTEX

ZI-BP79F45210 FERRIERESwww.redex.fr

Tel: +33 2 38 94 42 00Fax: +33 2 38 94 42 99Email: info@redex.fr

REDEXANDANTEX

ZI-BP79F45210 FERRIERESwww.redex.fr

Tel: +33 2 38 94 42 00Fax: +33 2 38 94 42 99Email: info@redex.fr