

KRP

PERFORMANCE SHEET

RX183-006-A

1/2

CUSTOMER:YONG JU PRECISION TECHNOL

DISTRIBUTOR:

DESIGNATION:KRP3+R.31.4.H

CODE:RX128565-12


CUSTOMER ORDER REF:RX103206T

REDEX ORDER REF:208449

SERIAL NUMBER:896275

MOTOR FLANGE CODE:

EXTERNAL DIMENSIONS & INTERFACES:

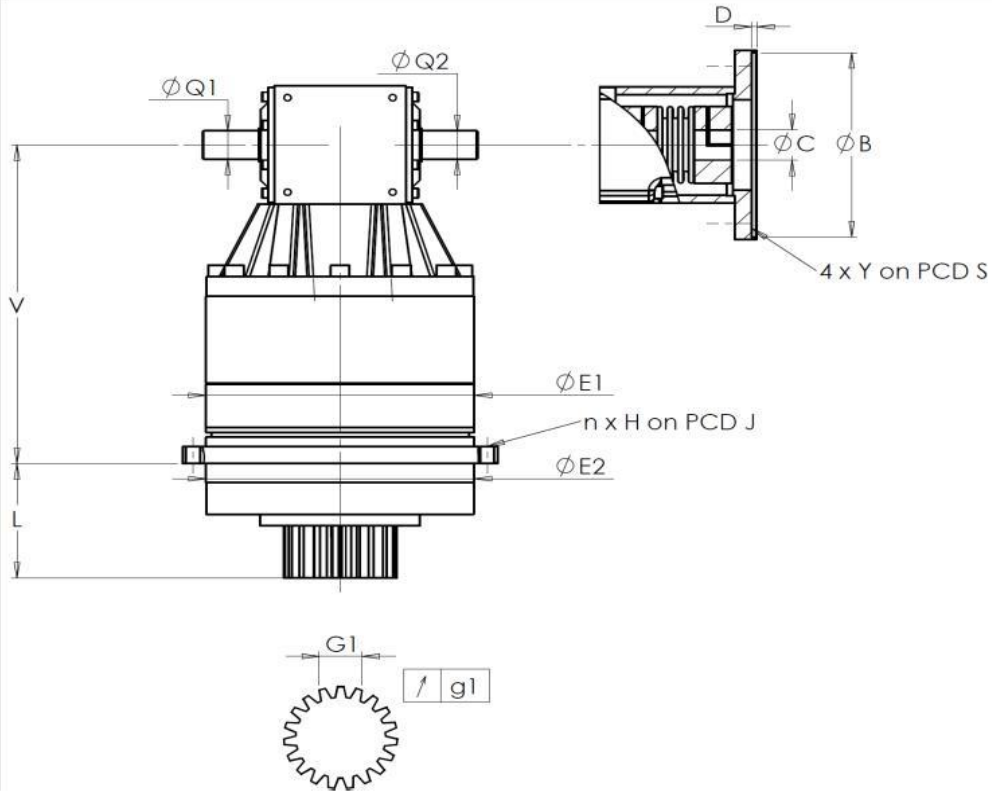

General tolerance: Js13

Cmm

Automatic / manual coordinate-measuring machine

µm

Micrometer

Cr

Calliper rule

Di

Dial indicator

Pg

Plug gauge

HOUSING				OUTPUT PINION				MOTOR FLANGE							
requirement			measure		requirement			measure		requirement			measure		
			J7837					R2373					-		
	E1	255h7 ⁰ _{-0,052}	µm	254.99	Span dimension over 3 teeth					Ø	B		µm		
	E2	255h7 ⁰ _{-0,052}	µm	254.98		G1	39,25 ⁰ _{-0,03}	Cmm	39,24		Ø	C		µm	
	n x H on PCD J	16 Ø13,5 on PCD 280	Cr	OK		g1	0,022	Di	0,01		D		Cr		
	V	337	µm	337.29	No-load input torque					Ø	S1		Cr		
	L	121	µm	121.22	Line 1				1 Nm			Ø	Y1		Pg
	Ø	Q1	30 ^{+0,009} _{-0,004}	µm	30					Noise level					
	Ø	Q2	30 ^{+0,009} _{-0,004}	µm	30					@1600 rpm input (dB(A))				74,5	
					Torsional stiffness (Nm/arcmin)		1	458							
					Radial stiffness (N/µm)		1	1153							

Date:16/10/2014

Version: A

Visa: JJ PELLÉ



For the installation, please refer to User Manual KRP (182/008)

SPECIFIC REMARKS:

Product images are for illustrative purposes only.

REDEXANDANTEX

ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr

REDEXANDANTEX

ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr