

KRP		Page
PERFORMANCE SHEET	RX183-006-A	1/2
CUSTOMER:	JIER	CUSTOMER ORDER REF: GCN001739 JIER
DISTRIBUTOR:	SHANGHAI GUDEL AUTOMATIO	REDEX ORDER REF: 211484
DESIGNATION:	KRP5+R.61.4.H	SERIAL NUMBER: 899885
CODE:	RX133319-32	MOTOR FLANGE CODE: RX130942-07

For the installation, please refer to User Manual KRP (182/008)

SPECIFIC REMARKS:

Product images are for illustrative purposes only.

KRP


PERFORMANCE SHEET

RX183-006-A

Page 2/2

EXTERNAL DIMENSIONS & INTERFACES:

SN: 899885

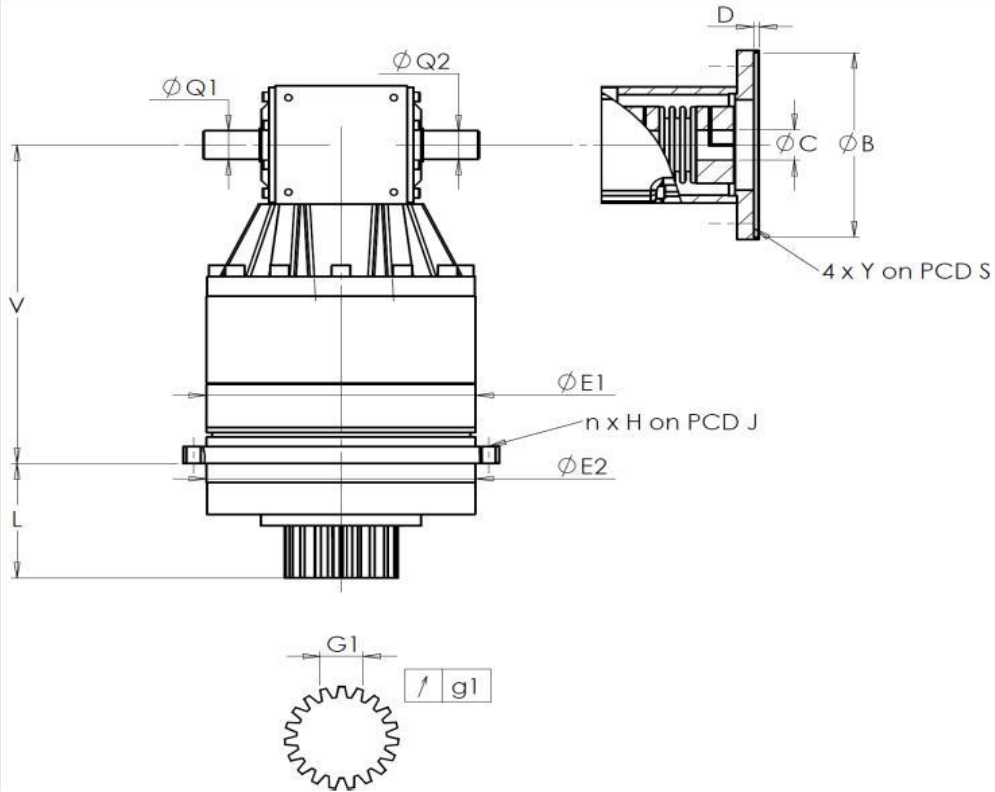

General tolerance: Js13				Cmm	Automatic / manual coordinate-measuring machine				µm	Micrometer				Cr	Calliper rule				Di	Dial indicator				Pg	Plug gauge								
HOUSING														OUTPUT PINION										MOTOR FLANGE									
		requirement				measure						requirement				measure						requirement				measure							
						A85								N150								P123											
		E1		355j6 ^{+0,018} _{-0,018}		µm		355				Span dimension over 3 teeth						Ø		B		250G7 ^{+0,061} _{+0,015}		µm		250.04							
		E2		355j6 ^{+0,018} _{-0,018}		µm		355.01				G1		62,97 ⁰ _{-0,05}		Cmm		62.94				Ø		C		42F7 ^{+0,050} _{+0,025}		µm		42.04			
		n x H on PCD J		12 Ø17,5 on PCD 385		Cr		OK				↗		g1		0,03		Di		0,01				D		8		Cr		8.13			
Cr																Ø		S1		300		Cr		300									
		V		491		µm		491.57				No-load input torque						Ø		Y1		M16		Pg		OK							
		L		178		µm		178.07				Line 1				2 Nm																	
		Ø		Q1		45 ^{+0,011} _{-0,005}		µm		45																							
		Ø		Q2		45 ^{+0,011} _{-0,005}		µm		45				Line		Stiffness						@1000 rpm input (dB(A))		69,0									
												Torsional stiffness (Nm/arcmin)				1		1076,47															
												Radial stiffness (N/µm)				1		1358															