

KRP		Page
PERFORMANCE SHEET		1/2
CUSTOMER:	JSC STANKOTECH	CUSTOMER ORDER REF: 61203 STANKOTECH
DISTRIBUTOR:		REDEX ORDER REF: 212474
DESIGNATION:	KRP3+M.31.3.H.28/38	SERIAL NUMBER: 901201
CODE:	RX129016-12	MOTOR FLANGE CODE: RX128581-01

For the installation, please refer to User Manual KRP (182/008)

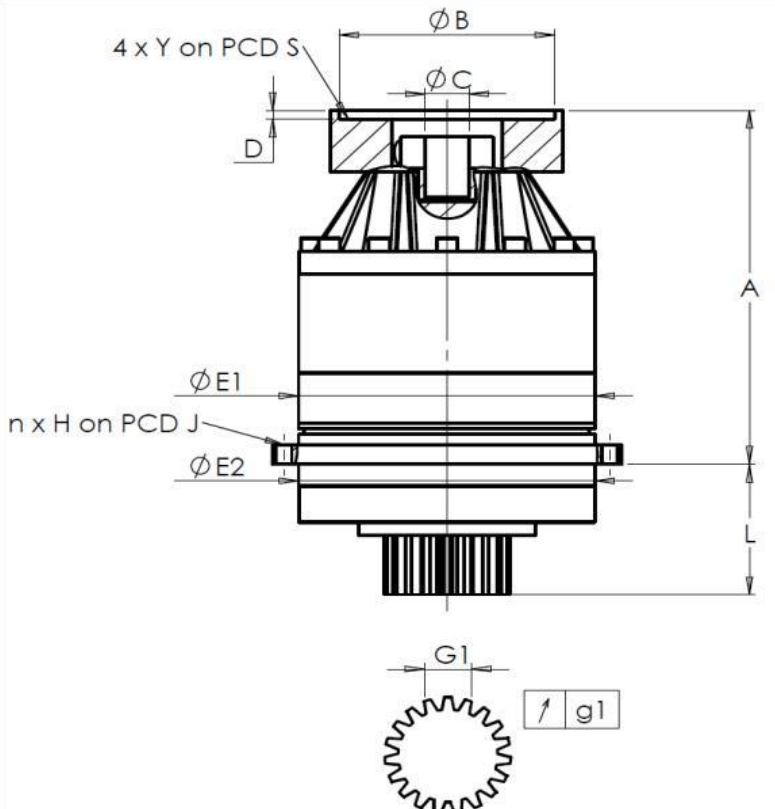
SPECIFIC REMARKS:

Product images are for illustrative purposes only.

REDEX

ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr

KRP		Page
PERFORMANCE SHEET		2/2
EXTERNAL DIMENSIONS & INTERFACES:		SN: 901201
		

General tolerance: Js13				Cmm	Automatic / manual coordinate-measuring machine				µm	Micrometer		Cr	Calliper rule		Di	Dial indicator		Pg	Plug gauge	
HOUSING					OUTPUT PINION							MOTOR FLANGE								
requirement					measure		requirement					measure		requirement					measure	
					A4721							N1862								
		E1	255h7 ⁰ _{-0,052}	µm	254,99	Span dimension over 3 teeth							Ø		B	181	µm	181		
		E2	255h7 ⁰ _{-0,052}	µm	254,98			G1	39,25 ⁰ _{-0,03}	Cmm	39,24	Ø		C	38 ^{+0,05} _{+0,025}	µm	38,03			
n x H on PCD J		16 Ø13,5 on PCD 280	Cr	16 Ø13,5 on	↗	g1	0,022	Di	0,01				D	8	Cr	8,5				
			Cr	PCD 280								Ø	S1	215	Cr	215				
		A	328,5	µm	329,38	No-load input torque							Ø		Y1	M12	Pg	ok		
		L	121	µm	120,85	Line 1					1 Nm									
												Noise level								
								Line	Stiffness		@1600 rpm input (dB(A))							65,0		
						Torsional stiffness (Nm/arcmin)		1	473,03											
						Radial stiffness (N/µm)		1	924											