

KRP		Page
PERFORMANCE SHEET		1/2
CUSTOMER:	ZDAS	CUSTOMER ORDER REF: 1837100118 ZDAS
DISTRIBUTOR:		REDEX ORDER REF: 212884
DESIGNATION:	KRP4+R.91.4.H	SERIAL NUMBER: 901856
CODE:	RX129176-33	MOTOR FLANGE CODE: RX129551-01

For the installation, please refer to User Manual KRP (182/008)

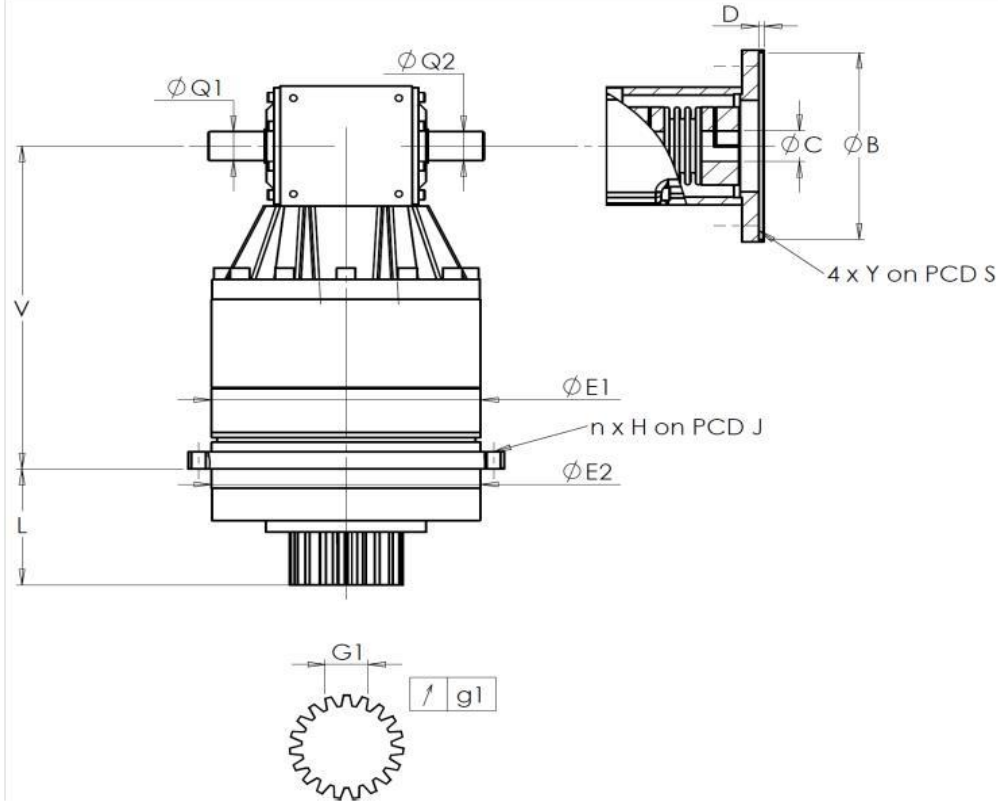
SPECIFIC REMARKS:

Product images are for illustrative purposes only.

REDEX

ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr

KRP		Page
PERFORMANCE SHEET		2/2
EXTERNAL DIMENSIONS & INTERFACES:		SN: 901856
		

General tolerance: Js13			Cmm		Automatic / manual coordinate-measuring machine			µm		Micrometer		Cr		Calliper rule		Di		Dial indicator		Pg		Plug gauge	
HOUSING						OUTPUT PINION						MOTOR FLANGE											
requirement				measure		requirement				measure		requirement				measure							
				B2158						N2234						A5582							
	E1	285h7 ⁰ _{-0,052}	µm	284.98	Span dimension over 3 teeth							Ø	B	180 ^{+0,054} _{+0,014}	µm	180.04							
	E2	285h7 ⁰ _{-0,052}	µm	284.98		G1	46,9 ⁰ _{-0,03}	Cmm	46.895		Ø	C	38 ^{+0,05} _{+0,025}	µm	38.05								
n x H on PCD J		16 Ø14 on PCD 310	Cr	16 Ø14 on	↗	g1	0,022	Di	0.005		D	8	Cr	8.11									
			Cr	PCD 310							Ø	S1	215	Cr	214.96								
	V	414.3	µm	414.27	No-load input torque							Ø	Y1	M12	Pg	M12							
	L	141	µm	140.96	Line 1				2,5 Nm														
Ø	Q1	35 ^{+0,011} _{-0,005}	µm	35.005							Noise level												
Ø	Q2	35 ^{+0,011} _{-0,005}	µm	35.01					Line	Stiffness	@1300 rpm input (dB(A))				65.5								
					Torsional stiffness (Nm/arcmin)		1	574,81															
					Radial stiffness (N/µm)		1	991															