

KRP		Page	
PERFORMANCE SHEET		1/2	
CUSTOMER:	KOBELCO STEWART	CUSTOMER ORDER REF:	28491-00 KOBELCO STEWART
DISTRIBUTOR:	ANDANTEX INCORPORATED	REDEX ORDER REF:	213129
DESIGNATION:	KRP2+R.61.4.H	SERIAL NUMBER:	902296
CODE:	RX128908-32	MOTOR FLANGE CODE:	RX129627-02

For the installation, please refer to User Manual KRP (182/008)

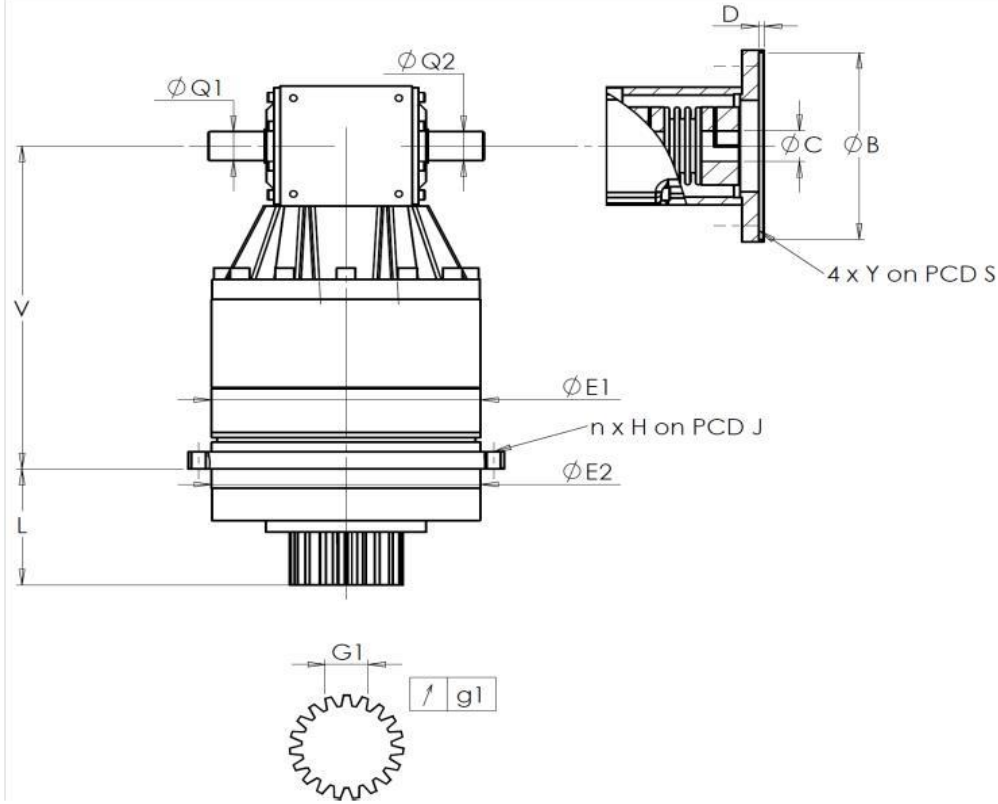
SPECIFIC REMARKS:

Product images are for illustrative purposes only.

REDEX

ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr

KRP		Page	
PERFORMANCE SHEET		2/2	
EXTERNAL DIMENSIONS & INTERFACES:		SN:	902296
			

General tolerance: Js13			Cmm	Automatic / manual coordinate-measuring machine			µm	Micrometer	Cr	Calliper rule	Di	Dial indicator	Pg	Plug gauge
HOUSING					OUTPUT PINION					MOTOR FLANGE				
requirement			measure		requirement			measure		requirement			measure	
			B3501					M718					B5745	
	E1	212h7 ⁰ _{-0,046}	µm	211,99	Span dimension over 4 teeth					Ø	B	114,3 ^{+0,047} _{+0,012}	µm	114,32
	E2	200h7 ⁰ _{-0,046}	µm	199,97		G1	44,27 ⁰ _{-0,03}	Cmm	44,255	Ø	C	35 ^{+0,05} _{+0,025}	µm	35,05
n x H on PCD J		12 Ø9 on PCD 233	Cr	12 Ø9 on PCD 233	↗	g1	0,022	Di	0,01		D	8	Cr	8,09
			Cr							Ø	S1	200	Cr	200,06
	V	289	µm	289,15	No-load input torque					Ø	Y1	M12	Pg	M12
	L	94	µm	94,08	Line 1			0,5 Nm						
Ø	Q1	25 ^{+0,009} _{-0,004}	µm	25,009						Noise level				
Ø	Q2	25 ^{+0,009} _{-0,004}	µm	25,005				Line	Stiffness	@1600 rpm input (dB(A))			70,5	
					Torsional stiffness (Nm/arcmin)		1	243,75						
					Radial stiffness (N/µm)		1	476						

Date: 25/09/2018

Visa: C DE MIRANDA

Version: A

REDEX

ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr