

KRP		Page
PERFORMANCE SHEET		1/2
CUSTOMER:	LLC STANTEK GROUP	CUSTOMER ORDER REF: 2020-02/01
DISTRIBUTOR:		REDEX ORDER REF: 215103
DESIGNATION:	KRP5+M.91.3.H.35/48	SERIAL NUMBER: 904487
CODE:	RX132915-33	MOTOR FLANGE CODE: RX128583-01

For the installation, please refer to User Manual KRP (182/008)

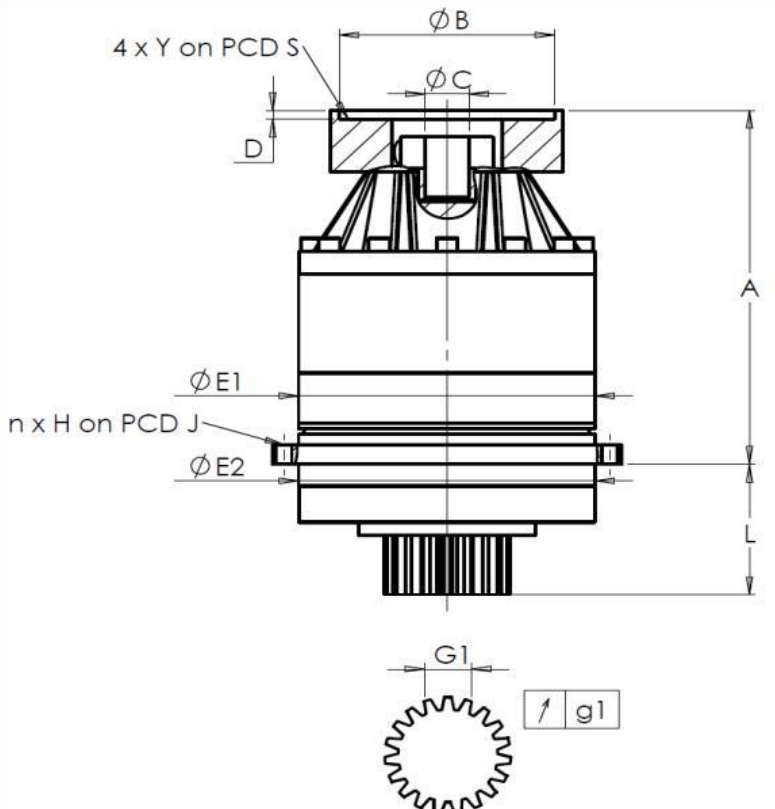
SPECIFIC REMARKS:

Product images are for illustrative purposes only.

REDEX

ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr

KRP		Page
PERFORMANCE SHEET		2/2
EXTERNAL DIMENSIONS & INTERFACES:		SN: 904487
		

General tolerance: Js13				Cmm		Automatic / manual coordinate-measuring machine				µm		Micrometer		Cr		Calliper rule		Di		Dial indicator		Pg		Plug gauge	
HOUSING						OUTPUT PINION						MOTOR FLANGE													
requirement				measure		requirement				measure		requirement				measure									
				D402						L3254															
		E1	355j6 ^{+0,018} _{-0,018}	µm	355,015	Span dimension over 3 teeth						Ø	B	181	µm	180,94									
		E2	355j6 ^{+0,018} _{-0,018}	µm	355,015		G1	62,97 ⁰ _{-0,05}	Cmm	62,95	Ø	C	38 ^{+0,05} _{+0,025}	µm	38,04										
n x H on PCD J		12 Ø17,5 on PCD 385	Cr	12 Ø17,5 on	↗	g1	0,03	Di	0,03		D	8	Cr	8,49											
			Cr	PCD 385							S1	215	Cr	215											
	A	421	µm	421,85	No-load input torque						Ø	Y1	M12	Pg	M12										
	L	178	µm	178,07	Line 1						1,3 Nm														
										Noise level															
								Line	Stiffness		@1000 rpm input (dB(A))						59,0								
						Torsional stiffness (Nm/arcmin)		1	1076,47																
						Radial stiffness (N/µm)		1	1211																