

KRP		Page
PERFORMANCE SHEET		1/2
CUSTOMER:	XILIX	CUSTOMER ORDER REF: 30450-00 XILIX
DISTRIBUTOR:	ANDANTEX INCORPORATED	REDEX ORDER REF: 215114
DESIGNATION:	KRP4+R.31.4.H	SERIAL NUMBER: 904558
CODE:	RX129176-12	MOTOR FLANGE CODE: RX129580-03

For the installation, please refer to User Manual KRP (182/008)

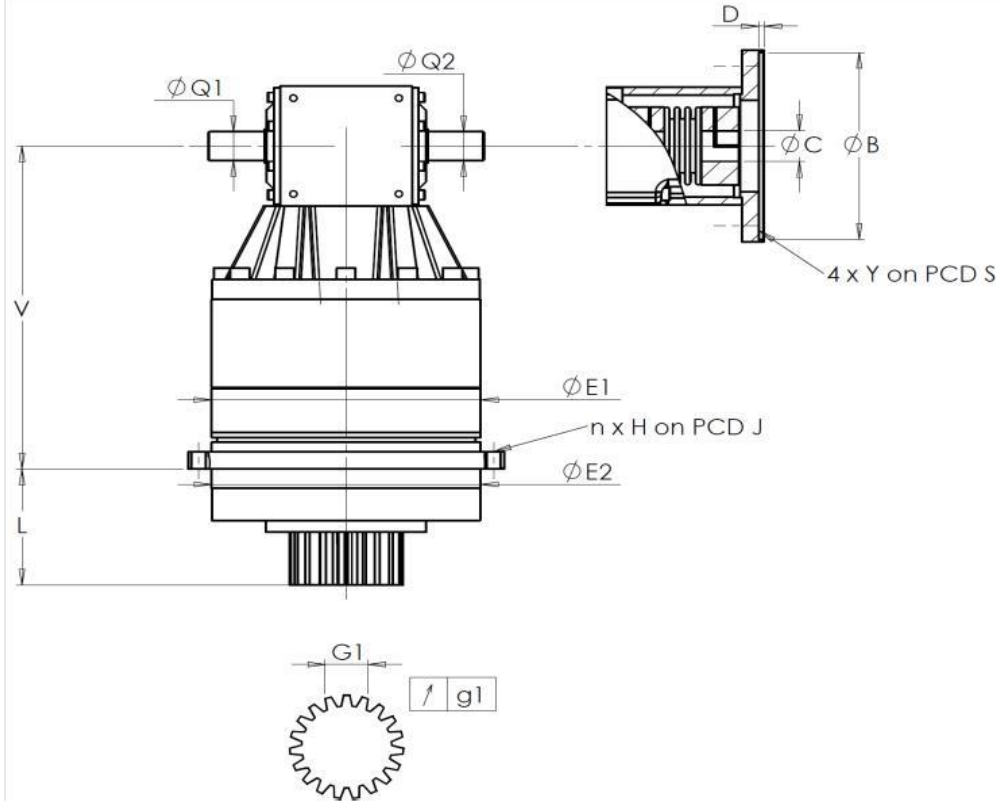
SPECIFIC REMARKS:

Product images are for illustrative purposes only.

REDEX

ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr

KRP		Page
PERFORMANCE SHEET		2/2
EXTERNAL DIMENSIONS & INTERFACES:		SN: 904558
		

General tolerance: Js13			Cmm	Automatic / manual coordinate-measuring machine			µm	Micrometer	Cr	Calliper rule	Di	Dial indicator	Pg	Plug gauge	
HOUSING					OUTPUT PINION					MOTOR FLANGE					
requirement			measure		requirement			measure		requirement			measure		
			C2320					K498					K7646		
	E1	285h7 ⁰ _{-0,052}	µm	284,99	Span dimension over 3 teeth						Ø	B	130 ^{+0,054} _{+0,014}	µm	130,04
	E2	285h7 ⁰ _{-0,052}	µm	285		G1	46,9 ⁰ _{-0,03}	Cmm	46,89		Ø	C	40 ^{+0,05} _{+0,025}	µm	40,03
n x H on PCD J		16 Ø14 on PCD 310	Cr	16 Ø14 on PCD 310	↗	g1	0,022	Di	0,01						
			Cr												
		V	414,3	µm	414,11	No-load input torque					Ø	S1	165	Cr	165,01
		L	141	µm	141,05	Line 1			3 Nm						
Ø	Q1	35 ^{+0,011} _{-0,005}	µm	35,005						Noise level					
Ø	Q2	35 ^{+0,011} _{-0,005}	µm	35,005				Line	Stiffness		@1300 rpm input (dB(A))			65,0	
					Torsional stiffness (Nm/arcmin)		1	574,81							
					Radial stiffness (N/µm)		1								

Date: 03/08/2020

Visa: P VASLIER

Version: A

REDEX

ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr