

KRP		Page	
PERFORMANCE SHEET		1/2	
CUSTOMER:	ELECTROIMPACT	CUSTOMER ORDER REF:	30693-00 ELECTROIMPACT
DISTRIBUTOR:	ANDANTEX INCORPORATED	REDEX ORDER REF:	215292
DESIGNATION:	KRP3+R.61.4.H	SERIAL NUMBER:	904646
CODE:	RX128565-32	MOTOR FLANGE CODE:	RX129474-04

For the installation, please refer to User Manual KRP (182/008)

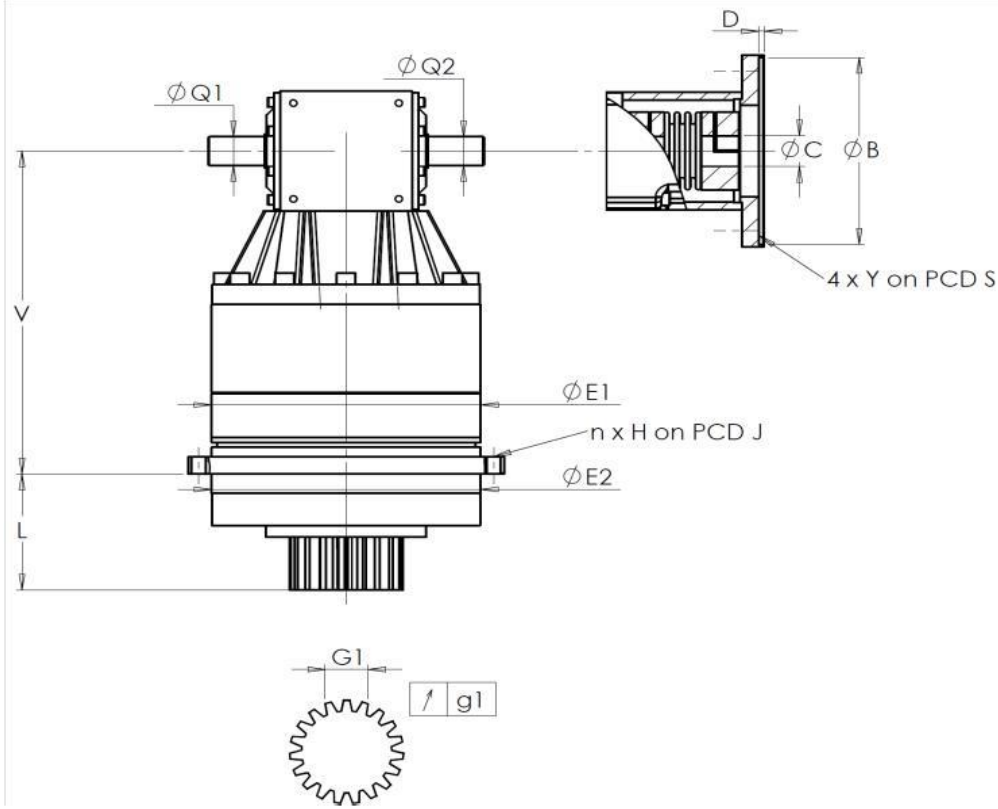
SPECIFIC REMARKS:

Product images are for illustrative purposes only.

REDEX

ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr

KRP		Page	
PERFORMANCE SHEET		2/2	
EXTERNAL DIMENSIONS & INTERFACES:		SN:	904646
			

General tolerance: Js13			Cmm	Automatic / manual coordinate-measuring machine			µm	Micrometer	Cr	Calliper rule	Di	Dial indicator	Pg	Plug gauge
HOUSING					OUTPUT PINION					MOTOR FLANGE				
requirement			measure		requirement			measure		requirement			measure	
			C1090					L1801					B4349	
	E1	255h7 ⁰ _{-0,052}	µm	254,99	Span dimension over 3 teeth					Ø	B	114,3 ^{+0,047} _{+0,012}	µm	114,326
	E2	255h7 ⁰ _{-0,052}	µm	254,99		G1	39,25 ⁰ _{-0,03}	Cmm	39,235	Ø	C	35 ^{+0,05} _{+0,025}	µm	35,05
n x H on PCD J		16 Ø13,5 on PCD 280	Cr	16 Ø13,5 on	↗	g1	0,022	Di	0,01		D	8	Cr	8
			Cr	PCD 280							S1	200	Cr	200,035
	V	337	µm	337,245	No-load input torque					Ø	Y1	M12	Pg	M12
	L	121	µm	121,2	Line 1			0,5 Nm						
Ø	Q1	30 ^{+0,009} _{-0,004}	µm	30						Noise level				
Ø	Q2	30 ^{+0,009} _{-0,004}	µm	30,005				Line	Stiffness	@1600 rpm input (dB(A))			64,0	
					Torsional stiffness (Nm/arcmin)		1	473,03						
					Radial stiffness (N/µm)		1	927						

Date: 30/07/2020

Visa: P VASLIER

Version: A

REDEX

ZI-BP79
F45210 FERRIERES
www.redex.fr

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex.fr