

CUSTOMER:	YONG JU PRECISION TECHNOLOGY	CUSTOMER ORDER REF:	RX110304T YONG JU
DISTRIBUTOR:		REDEX ORDER REF:	215648
DESIGNATION:	KRP3+R.31.4.H	SERIAL NUMBER:	905719
CODE:	RX128565-12	MOTOR FLANGE CODE:	

For the installation, please refer to User Manual KRP (182/008)

SPECIFIC REMARKS:

* Accepted according to Redex derogation FA21-177


Product images are for illustrative purposes only.

REDEX

1, Rue Paul De Fontenay
F- 45210 FERRIERES
www.redex-group.com

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex-group.com

EXTERNAL DIMENSIONS & INTERFACES: SN: 905719

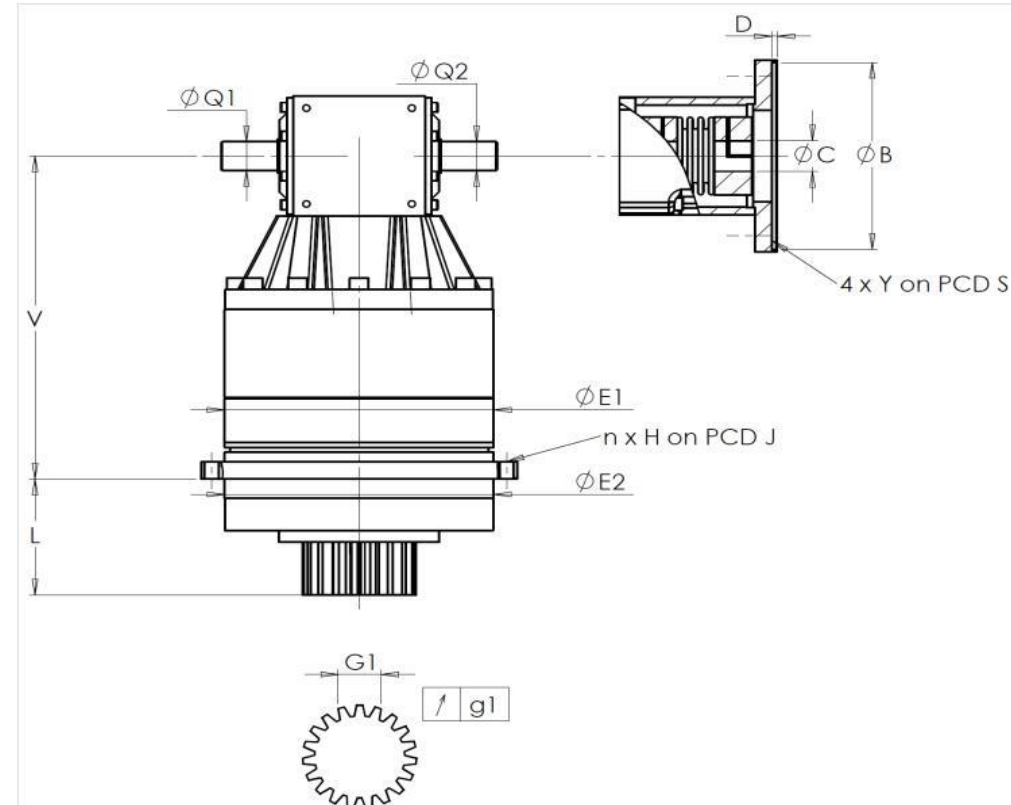

General tolerance: Js13	<i>Cmm</i>	Automatic / manual coordinate-measuring machine	μm	Micrometer	<i>Cr</i>	Calliper rule	<i>Di</i>	Dial indicator	<i>Pg</i>	Plug gauge
-------------------------	------------	--	---------------	------------	-----------	---------------	-----------	----------------	-----------	------------

HOUSING					OUTPUT PINION					MOTOR FLANGE				
requirement			measure		requirement			measure		requirement			measure	
			E719					J2637					-	
	E1	255h7 ⁰ _{-0,052}	μm	254,99	Span dimension over 3 teeth					∅	B		μm	
	E2	255h7 ⁰ _{-0,052}	μm	254,99		G1	39,25 ⁰ _{-0,03}	Cmm	39,215 *	∅	C		μm	
	n x H on PCD J	16 Ø13,5 on PCD 280	Cr	16 Ø13,5 on	↗	g1	0,022	Di	0,005		D	Cr		
			Cr	PCD 280										
	V	337	μm	337	No-load input torque					∅	Y1		Pg	
	L	121	μm	121	Line 1			1,2 Nm						
∅	Q1	30 ^{+0,009} _{-0,004}	μm	30						Noise level				
∅	Q2	30 ^{+0,009} _{-0,004}	μm	30				Line	Stiffness	@1600 rpm input (dB(A))			69,0	
					Torsional stiffness (Nm/arcmin)		1	473,03						
					Radial stiffness (N/μm)		1	1011						

Date: 13/12/2021

Visa: P VASLIER

Version: A

REDEX

1, Rue Paul De Fontenay
F- 45210 FERRIERES
www.redex-group.com

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex-group.com