


KRPX				Page	
Performance sheet		RX183-007-D	1/2		
CUSTOMER:	DMG	CUSTOMER ORDER REF:	994626		
DISTRIBUTOR:	DECKEL MAHO Pfronten GmbH	REDEX ORDER REF:	216516		
DESIGNATION:	KRPX2.M1.10.3.H.35/48	SERIAL NUMBER:	906486		
CODE:	RX134762-03	MOTOR FLANGE CODE:	RX128583-01		

EXTERNAL DIMENSIONS & INTERFACES:

SN: 906486

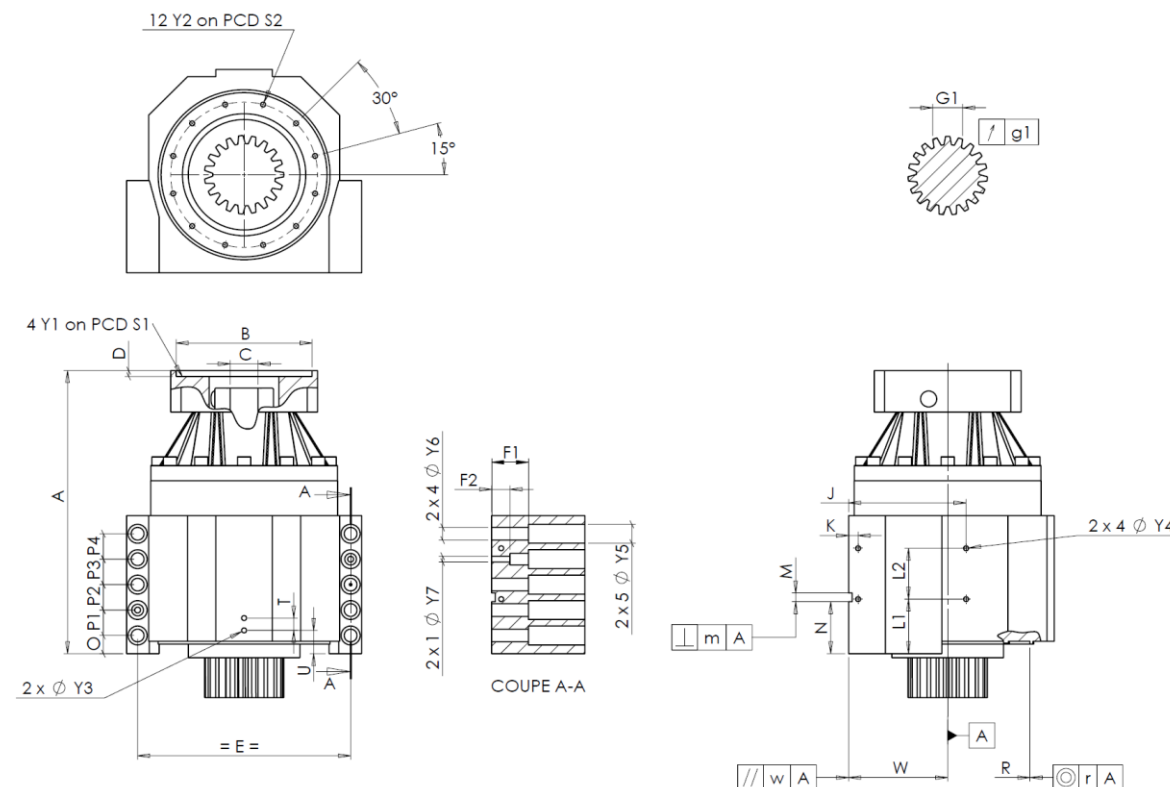

General tolerance: Js13		Cmm	Automatic / manual coordinate-measuring machine		µm	Micrometer	Cr	Calliper rule	Di	Dial indicator	Pg	Plug gauge			
HOUSING				HOUSING				MOTOR FLANGE							
requirement				measure				requirement				measure			
				E4089											
	Y2	M6x12	Pg	M6x12		L1	60	Cr	60						
Ø	S2	165 ^{+0,1} _{-0,1}	Cr	165		L2	60	Cr	60	Ø	B	181	µm	181,01	
	A	295	µm	295,77		J	130	Cr	130	Ø	C	38 ^{+0,05} _{+0,025}	µm	38,025	
	E	240	Cr	240	2 x 4Ø	K	11	Cr	11		D	8	Cr	8,52	
	O	15	Cr	15		Y4	M6x12	Pg	M6x12	Ø	S1	215	Cr	215	
	P1	30	Cr	30		F1	40	Cr	40	Ø	Y1	M12	Pg	M12	
	P2	30	Cr	30	2 x 1Ø	F2	24	Cr	24	No-load input torque					
	P3	30	Cr	30	2 x 4Ø	Y7	10	µm	10	Line 1		2,3 Nm			
	P4	30	Cr	30	2 x 5Ø	Y5	24	µm	24	Stiffness					
	T	14	Cr	14		M H6	10 ^{+0,009} ₀	Cmm	10	Line		Stiffness			
	U	26	Cr	26	⊥	m	0,05	Cmm	0,02	Torsional stiffness (Nm/arcmin)		1	243,75		
2 x 1Ø	Y3	M6x12	Pg	M6x12		N	55 ^{+0,1} _{-0,1}	Cmm	54,956	Radial stiffness (N/µm)		1	654		
	R	186 ^{+0,2} _{+0,1}	Cmm	186,149	A	W	110 ^{+0,02} _{-0,02}	Cmm	109,993						
⊙	r	0,1	Cmm	0,008	//	w	0,03	/A	Cmm	0,002					

OUTPUT PINION				Noise level	
J2721				@1100 rpm input (dB(A))	
59,5					
Span dimension over 4 teeth					
	G1	44,27 ⁰ _{-0,03}	Cmm	44,255	
↗	g1	0,022	Di	0,01	

Date: 19/05/2022

Visa: C DE MIRANDA

Version: A

Product images are for illustrative purposes only.

	1, Rue Paul De Fontenay F- 45210 FERRIERES www.redex-group.com	Tel: +33 2 38 94 42 00 Fax: +33 2 38 94 42 99 Email: info@redex-group.com
	1, Rue Paul De Fontenay F- 45210 FERRIERES www.redex-group.com	Tel: +33 2 38 94 42 00 Fax: +33 2 38 94 42 99 Email: info@redex-group.com