


KRPX				Page	
Performance sheet		RX183-007-D	1/2		
CUSTOMER:	DMG	CUSTOMER ORDER REF:	151440		
DISTRIBUTOR:		REDEX ORDER REF:	218398		
DESIGNATION:	KRPX2.M1.10D.3.H.35/48	SERIAL NUMBER:	908966		
CODE:	RX135375-03	MOTOR FLANGE CODE:	RX128583-01		

EXTERNAL DIMENSIONS & INTERFACES:

SN: 908966

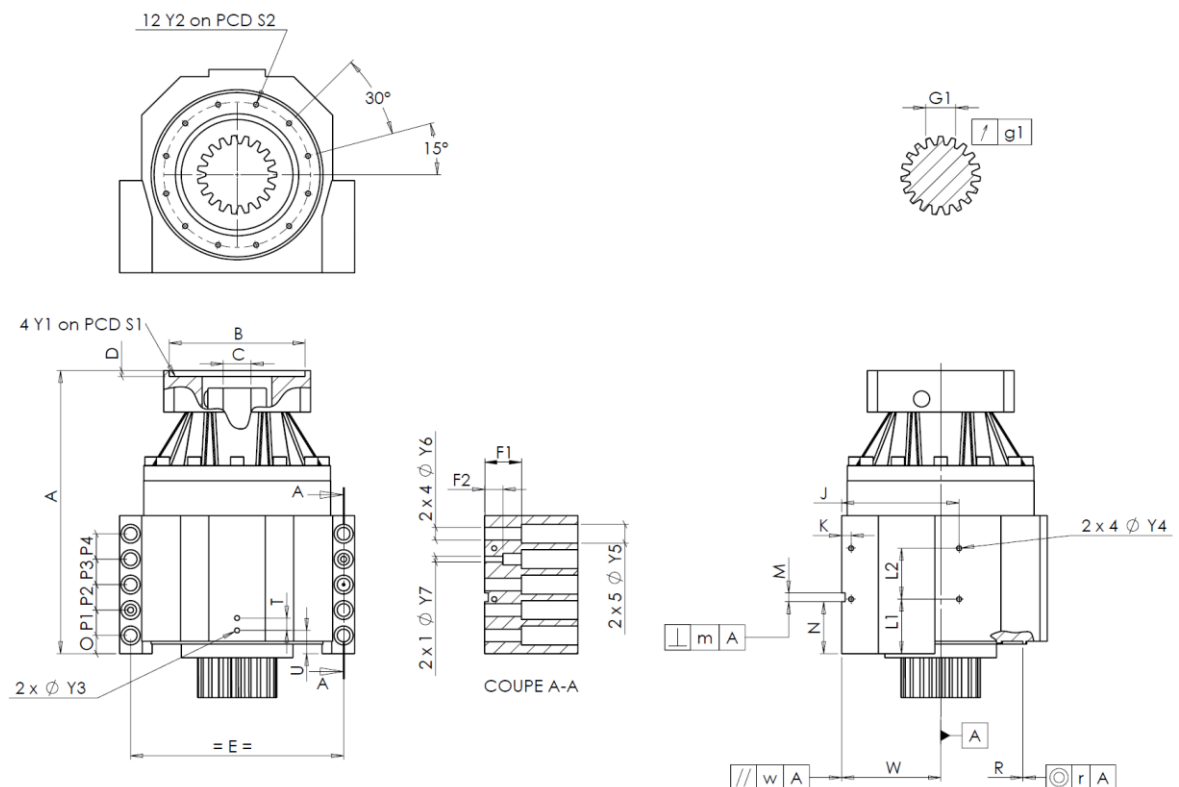

General tolerance: Js13		Cmm	Automatic / manual coordinate-measuring machine		µm	Micrometer	Cr	Calliper rule	Di	Dial indicator	Pg	Plug gauge			
HOUSING					HOUSING					MOTOR FLANGE					
requirement					measure					requirement			measure		
					G4208										
	Y2	M6x12	Pg	M6x12		L1	60	Cr	60						
Ø	S2	165 ^{+0,1} _{-0,1}	Cr	165		L2	60	Cr	60	Ø	B	181	µm	180,80	
	A	295	µm	295,65		J	130	Cr	130	Ø	C	38 ^{+0,05} _{+0,025}	µm	38,04	
	E	240	Cr	240	2 x 4Ø	K	11	Cr	11		D	8	Cr	8,52	
	O	15	Cr	15		F1	40	Cr	40	Ø	S1	215	Cr	215	
	P1	30	Cr	30		F2	24	Cr	24	Ø	Y1	M12	Pg	M12	
	P2	30	Cr	30	2 x 1Ø	Y7	10	µm	10	No-load input torque					
	P3	30	Cr	30	2 x 4Ø	Y6	15,5	µm	15,5	Line 1 2,3 Nm					
	P4	30	Cr	30	2 x 5Ø	Y5	24	µm	24						
	T	14	Cr	14		M H6	10 ^{+0,009} ₀	Cmm	10						
	U	26	Cr	26	⊥	m	0,05	Cmm	0,008						
2 x 1Ø	Y3	M6x12 ^{+0,2} _{+0,1}	Pg	M6x12		N	55 ^{+0,1} _{-0,1}	Cmm	55,003	Torsional stiffness (Nm/arcmin) 1 243,75					
	R	186 ^{+0,2} _{+0,1}	Cmm	186,136	A	W	110 ^{+0,02} _{-0,02}	Cmm	109,98	Radial stiffness (N/µm) 1 622					
⊙	r	0,1	Cmm	0,016	//	w	0,03	/A Cmm	0,002						

OUTPUT PINION					Noise level	
F4915					@1100 rpm input (dB(A))	59,0
Span dimension over 4 teeth						
	G1	44,27 ⁰ _{-0,03}	Cmm	44,245		
↗	g1	0,022	Di	0,01		

Date: 11/09/2024

Visa: C DE MIRANDA

Version: A

Product images are for illustrative purposes only.



1, Rue Paul De Fontenay
F- 45210 FERRIERES
www.redex-group.com

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex-group.com



1, Rue Paul De Fontenay
F- 45210 FERRIERES
www.redex-group.com

Tel: +33 2 38 94 42 00
Fax: +33 2 38 94 42 99
Email: info@redex-group.com