


CUSTOMER: **EMCO** CUSTOMER ORDER REF: ***446 EMCO**
 DISTRIBUTOR: **REDEX ITALIA** REDEX ORDER REF: **220395**
 DESIGNATION: **KRP1+M.7D.3.H.28/38** SERIAL NUMBER: **910460**
 CODE: **RX135314-00** MOTOR FLANGE CODE: **RX128581-01**

EXTERNAL DIMENSIONS & INTERFACES: SN: **910460**

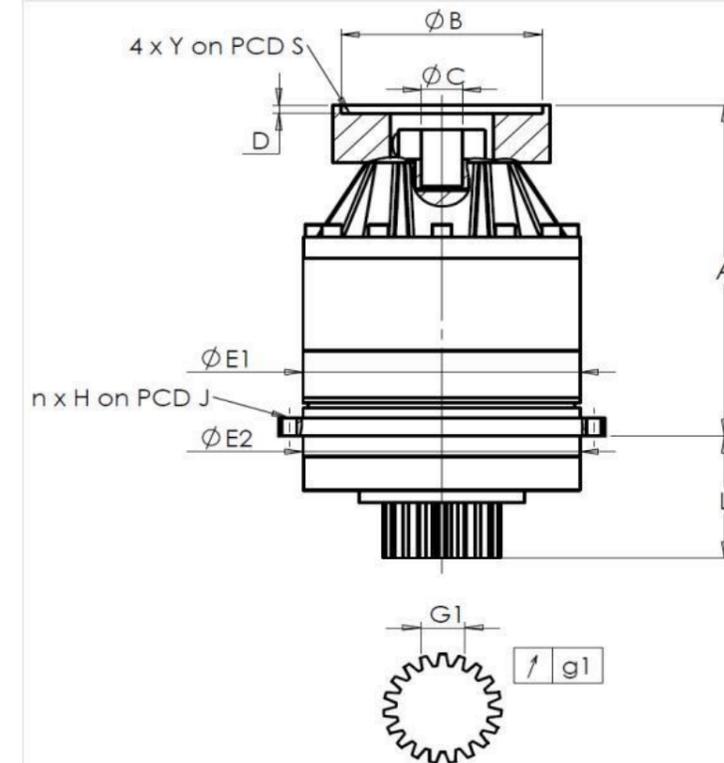

For the installation, please refer to User Manual KRP (182/008)

SPECIFIC REMARKS:

General tolerance: Js13 Cmm Automatic / manual coordinate-measuring machine µm Micrometer Cr Calliper rule Di Dial indicator Pg Plug gauge

HOUSING				OUTPUT PINION				MOTOR FLANGE			
requirement	measure			requirement	measure			requirement	measure		
	H2414				G7238						
E1	152h7 ⁰ _{-0,04}	µm	151.98	Span dimension over 3 teeth				Ø B	181	µm	181
E2	140h7 ⁰ _{-0,04}	µm	139.985	G1	23,28 ⁰ _{-0,03}	Cmm	23.26	Ø C	38 ^{+0,05} _{+0,025}	µm	38.03
n x H on PCD J	12 Ø6,5 on PCD 168	Cr	12 Ø6,5 on PCD 168	g1	0,021	Di	0.02	Ø S1	215	Cr	215
A	217	µm	217.71	No-load input torque				Ø Y1	M12	Pg	M12
L	71	µm	70.83	Line 1	1,2 Nm						

			Noise level	
	Line	Stiffness	@1600 rpm input (dB(A))	
Torsional stiffness (Nm/arcmin)	1	81,39	66.0	
Radial stiffness (N/µm)	1	342		

Date: **13/02/2026**
 Version: **A**

Visa: **C DE MIRANDA**

Product images are for illustrative purposes only.