


CUSTOMER: **REDEX SHANGHAI** CUSTOMER ORDER REF:   
 DISTRIBUTOR: **REDEX SHANGHAI REPAIRING** REDEX ORDER REF: **1000063**  
 DESIGNATION: **KRP3+MX.17.3.H.42/48** SERIAL NUMBER: **910546**  
 CODE: **RX134954-41** MOTOR FLANGE CODE: **RX134953-00**

EXTERNAL DIMENSIONS & INTERFACES: SN: **910546**

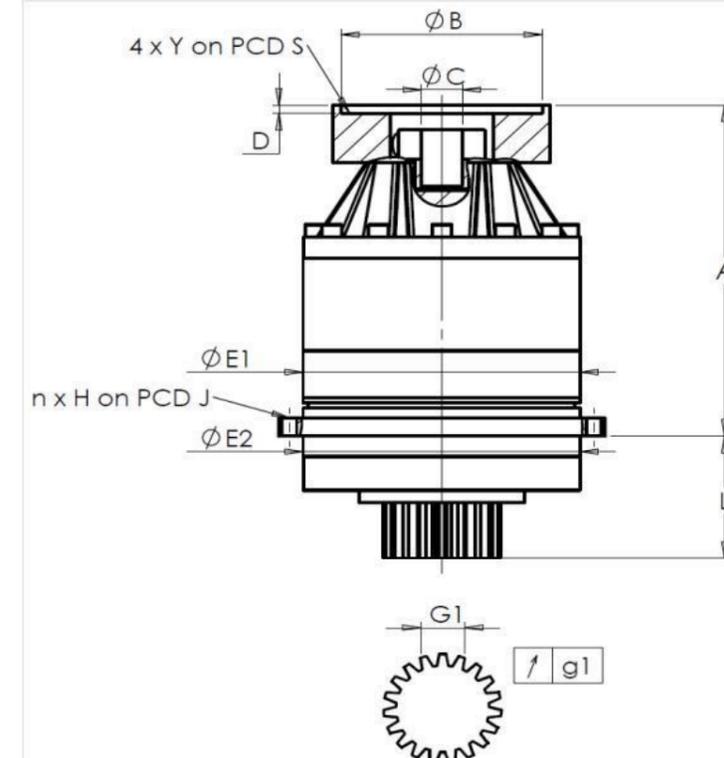

For the installation, please refer to User Manual KRP (182/008)

SPECIFIC REMARKS:

General tolerance: Js13 Cmm Automatic / manual coordinate-measuring machine µm Micrometer Cr Calliper rule Di Dial indicator Pg Plug gauge

HOUSING				OUTPUT PINION				MOTOR FLANGE			
requirement		measure		requirement		measure		requirement		measure	
		J2567				J1224					
E1	255h7 <sup>0</sup> <sub>-0,052</sub> µm	254.98	Span dimension over 3 teeth				Ø B	251 µm	251		
E2	255h7 <sup>0</sup> <sub>-0,052</sub> µm	254.985	G1	39,25 <sup>0</sup> <sub>-0,03</sub> Cmm	39.235	Ø C	48F7 <sup>+0,05</sup> <sub>+0,025</sub> µm	48.025			
n x H on PCD J	16 Ø13,5 on PCD 280	16 Ø13,5 on PCD 280	g1	0,022	Di	0.02	Ø D	8	Cr	8.5	
A	322.5 µm	323.3	No-load input torque				Ø S1	300	Cr	300	
L	121 µm	120.86	Line 1		3,5 Nm		Ø Y1	M16	Pg	M16	

			Noise level	
			@1600 rpm input (dB(A))	67.5
Torsional stiffness (Nm/arcmin)	Line	Stiffness		
	1	473,03		
Radial stiffness (N/µm)	1	1013		

Date: **02/03/2026**

Visa: **C DE MIRANDA**

Version: **A**

Product images are for illustrative purposes only.